


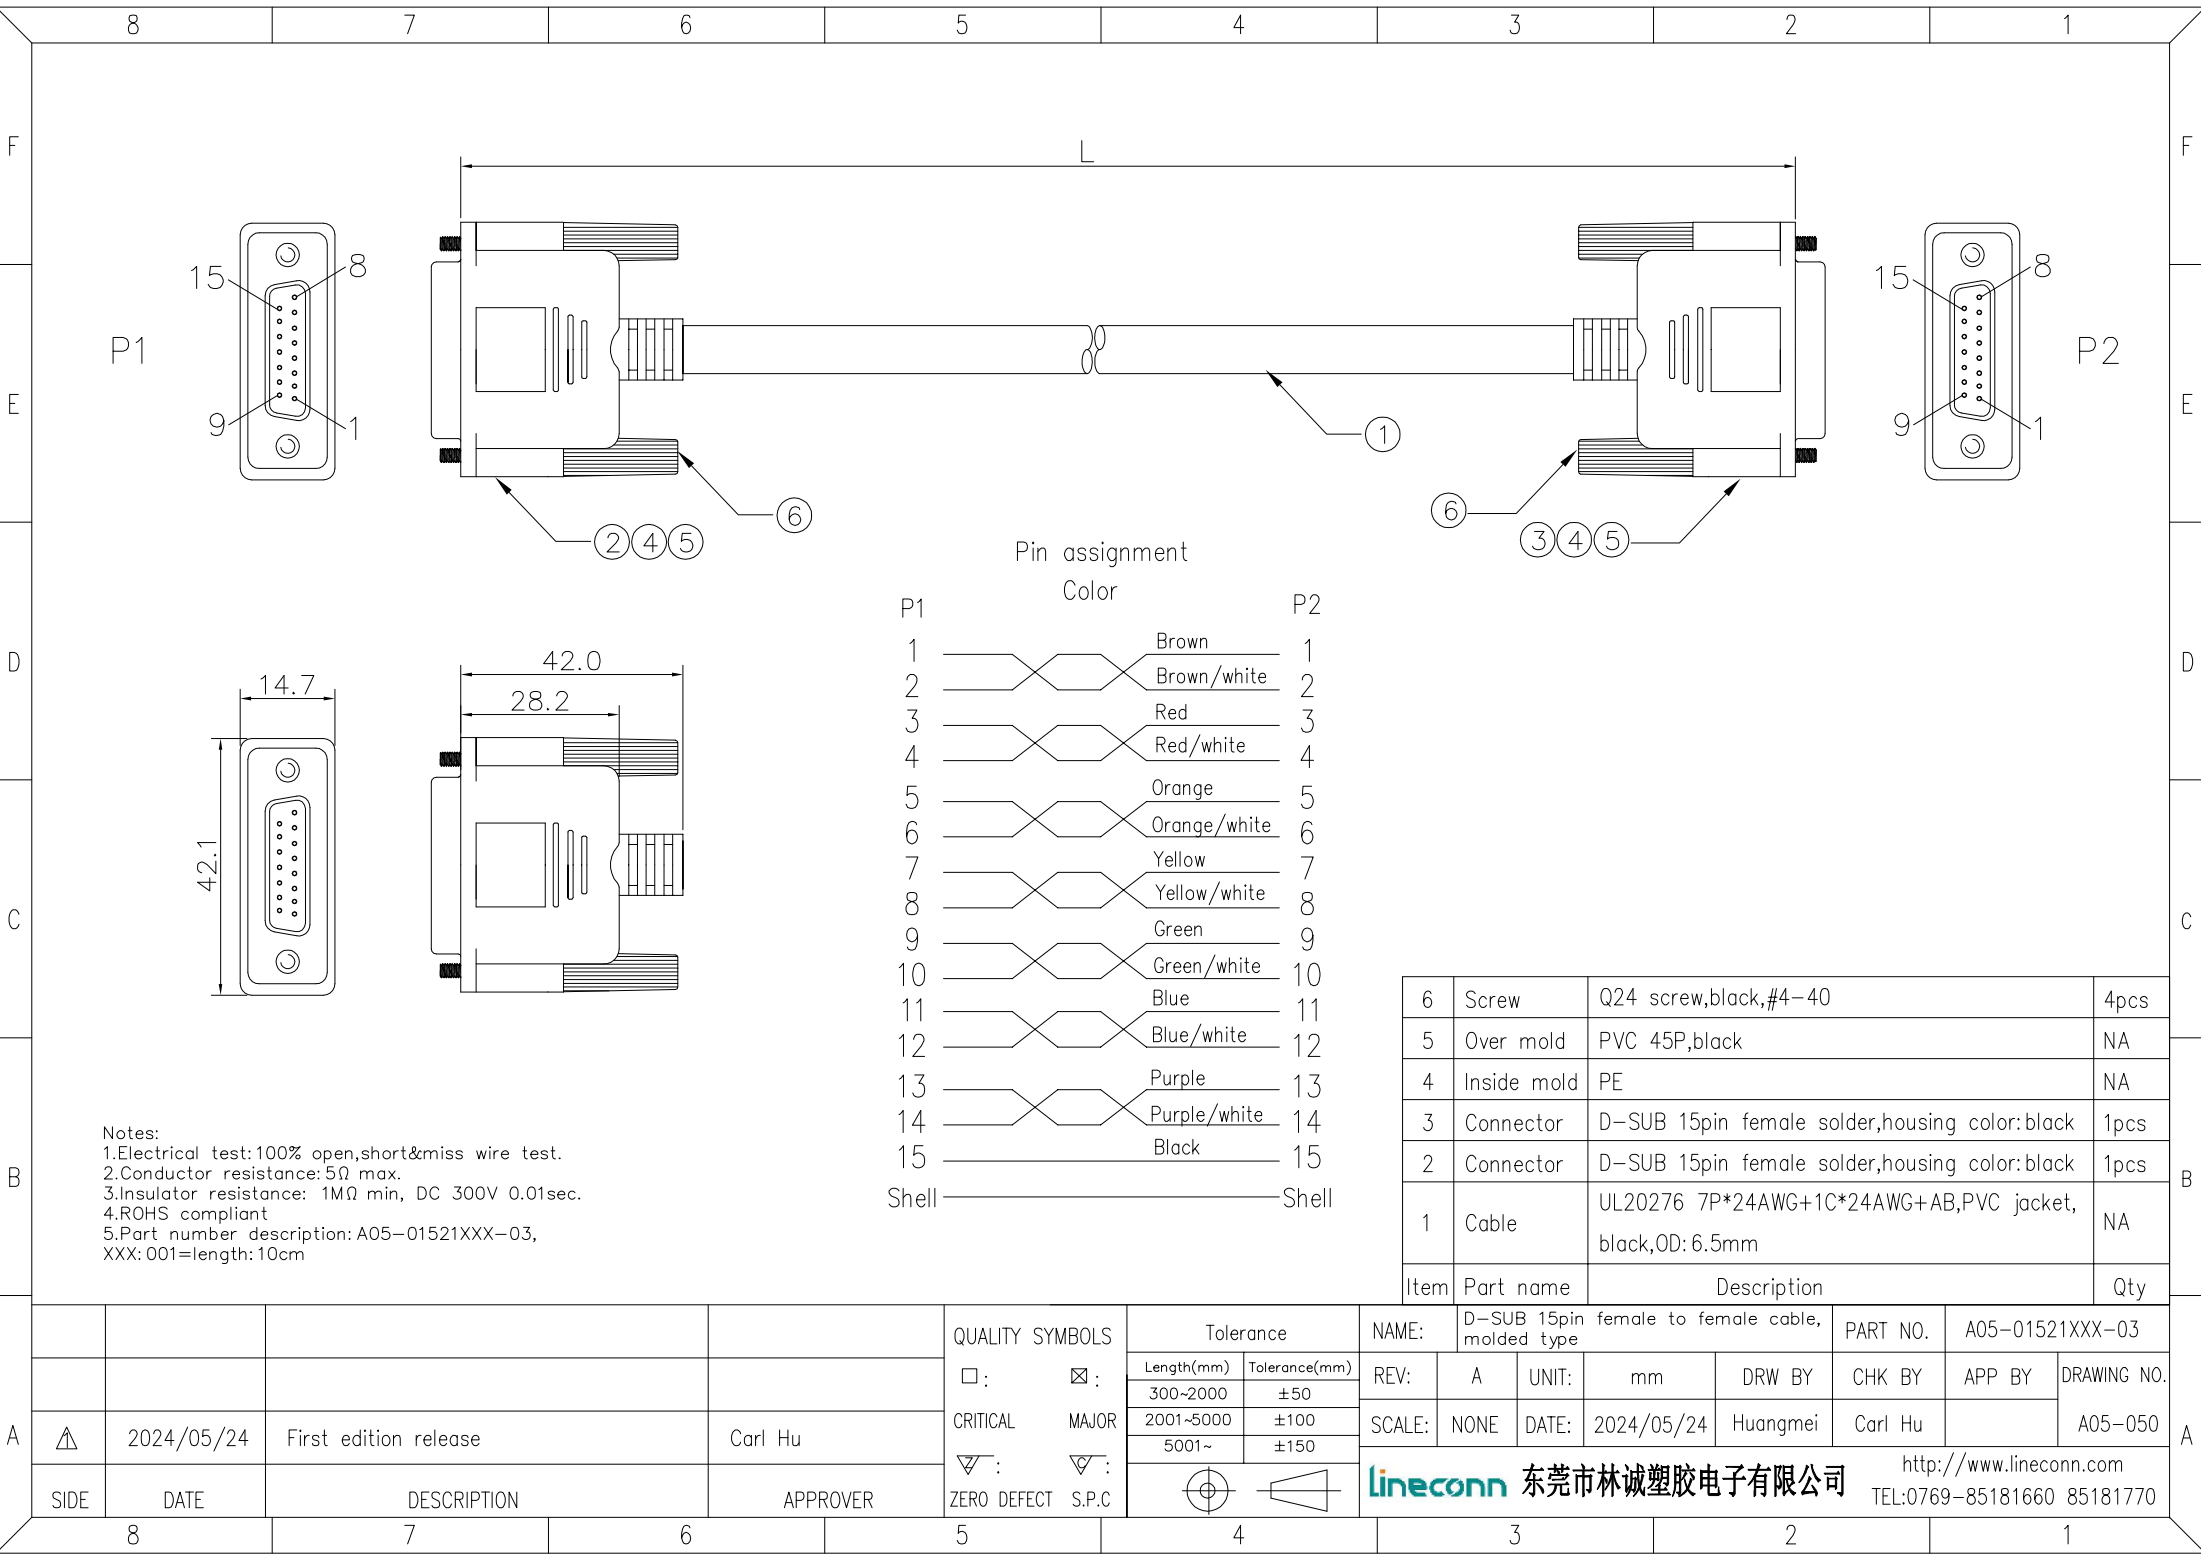


Notes:
1.Electrical test:100% open,short&miss wire test.
2.Conductor resistance:5Ω max.
3.Insulator resistance: 1MΩ min, DC 300V 0.01sec.
4.ROHS compliant
5.Part number description: A05-01521XXX-03,
XXX: 001=length:10cm

Pin assignment		Color	
P1			P2
1		Brown	1
2		Brown/white	2
3		Red	3
4		Red/white	4
5		Orange	5
6		Orange/white	6
7		Yellow	7
8		Yellow/white	8
9		Green	9
10		Green/white	10
11		Blue	11
12		Blue/white	12
13		Purple	13
14		Purple/white	14
15		Black	15
Shell			Shell

6	Screw	Q24 screw,black,#4-40	4pcs
5	Over mold	PVC 45P,black	NA
4	Inside mold	PE	NA
3	Connector	D-SUB 15pin female solder,housing color:black	1pcs
2	Connector	D-SUB 15pin female solder,housing color:black	1pcs
1	Cable	UL20276 7P*24AWG+1C*24AWG+AB,PVC jacket, black,OD: 6.5mm	NA

Item	Part name	Description	Qty
------	-----------	-------------	-----

				QUALITY SYMBOLS	Tolerance		NAME:		D-SUB 15pin female to female cable, molded type			PART NO.		A05-01521XXX-03			
				□ : ☒ :	Length(mm)	Tolerance(mm)	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.			
					300~2000	±50											
				CRITICAL MAJOR	2001-5000	±100	SCALE:	NONE	DATE:	2024/05/24	Huangmei	Carl Hu		A05-050			
				▽ : ▽ :	5001~	±150											
				ZERO DEFECT S.P.C			 东莞市林诚塑胶电子有限公司									http://www.lineconn.com	
SIDE	DATE	DESCRIPTION		APPROVER										TEL:0769-85181660 85181770			
8		7		6		5		4		3		2		1			