
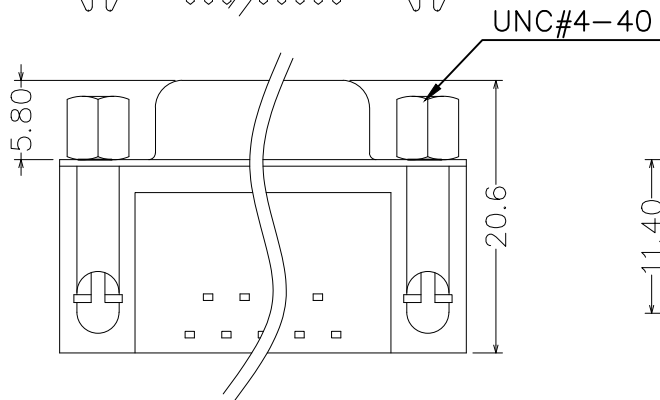
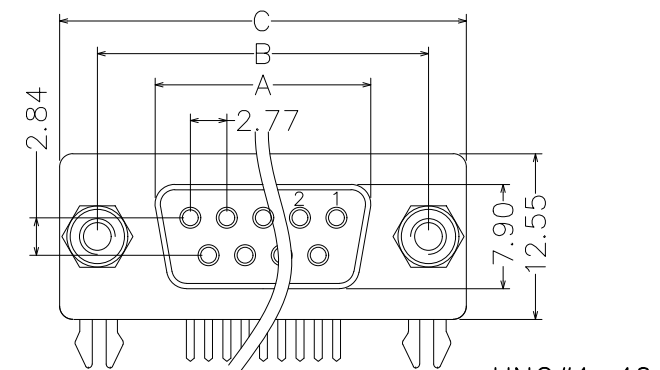


PCB layout

Pin	A±0.25	B±0.13	C±0.38
9	16.30	24.99	30.81
15	24.66	33.32	39.14
25	38.38	47.04	53.04
37	54.84	63.50	69.32

Voltage current rating:3.0 AMP
Dielectric withstanding voltage:1000V AC
Contact resistance:30 mΩ max.
Insulation resistance:1000mΩ min.
Temperature range:-45℃ to +125℃
Durability:500 cycles
ROHS compliant

Part No.:
B05-0XX611AD-G4
Pin No.:
09: 9pin
15: 15pin
25: 25pin
37: 37pin

5	Screw	Steel	Plating: Ni
4	Board lock	Copper alloy	Plating: Ni
3	Shell	SPCC	Plating: Ni
2	Housing	PBT+G.F UL94V-0	Color: black
1	Terminal	Copper alloy	Plating: G/F and Sn
Item	Desc.	Material	Remarks

△	2019/11/17	Added durability description	Jack Chen
△	2014/01/04	Change the dimensioning position, change the product name	King Zhou
△	2010/07/22	First edition release	King Zhou
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□:	☒:	x. ±0.60	
CRITICAL	MAJOR	.x ±0.40	
▽:	▽:	.xx ±0.25	
ZERO DEFECT	S.P.C		

NAME:	D-SUB female right angle 10.3mm, board lock riveted, 4.8mm screws lock			PART NO.	B05-0XX611AD-G4		
REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2010/07/22	Huangmei	Jack Chen		B05-074
				东莞市林诚塑胶电子有限公司			
				http://www.lineconn.com			
				TEL:0769-85181660 85181770			