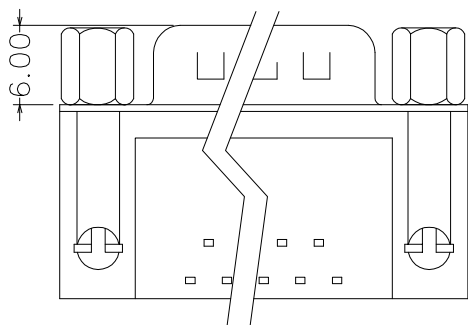
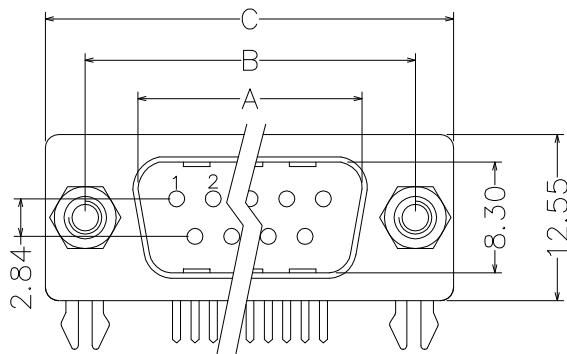


PCB layout

Pin	A±0.25	B±0.13	C±0.38
9	16.92	24.99	30.81
15	25.25	33.32	39.14
25	38.96	47.04	53.04
37	55.42	63.50	69.32

Voltage current rating:3.0 AMP
Dielectric withstanding voltage:1000V AC
Contact resistance:30 mΩ max.
Insulation resistance:1000mΩ min.
Temperature range:−45℃ to +125℃
Durability:500 cycles
ROHS compliant

Part No.:
B05-0XX511AD-G5

Pin No.:
09: 9pin
15: 15pin
25: 25pin
37: 37pin

5	Screw	Steel	Plating: Ni
4	Board lock	Copper alloy	Plating: Ni
3	Shell	SPCC	Plating: Ni
2	Housing	PBT+G.F UL94V-0	Color: black
1	Terminal	Copper alloy	Plating: G/F and Sn
Item	Desc.	Material	Remaks

△	2019/12/23	Added durability description	Jack Chen
△	2014/02/27	Change the dimensioning position, change the product name	King Zhou
△	2011/03/07	First edition release	King Zhou

QUALITY SYMBOLS
□: ☒:
CRITICAL MAJOR
▽: ▽:
ZERO DEFECT S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25

NAME:	D-SUB male right angle 10.3mm, board lock riveted,5.8mm screws lock				PART NO.	B05-0XX511AD-G5		
REV:	E	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2011/03/07	Huangmei	Jack Chen		B05-151	
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770			

SIDE	DATE	DESCRIPTION	APPROVER
------	------	-------------	----------