
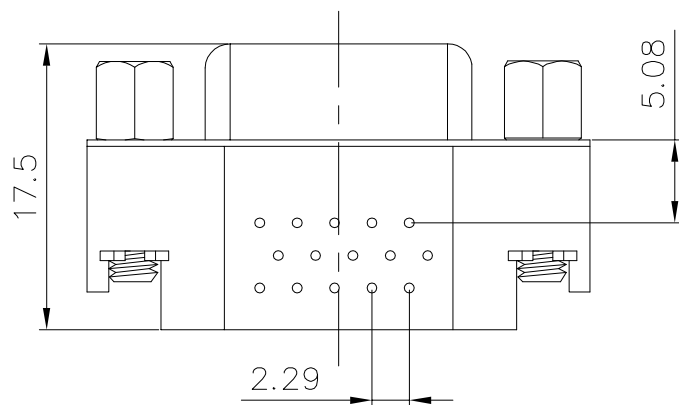
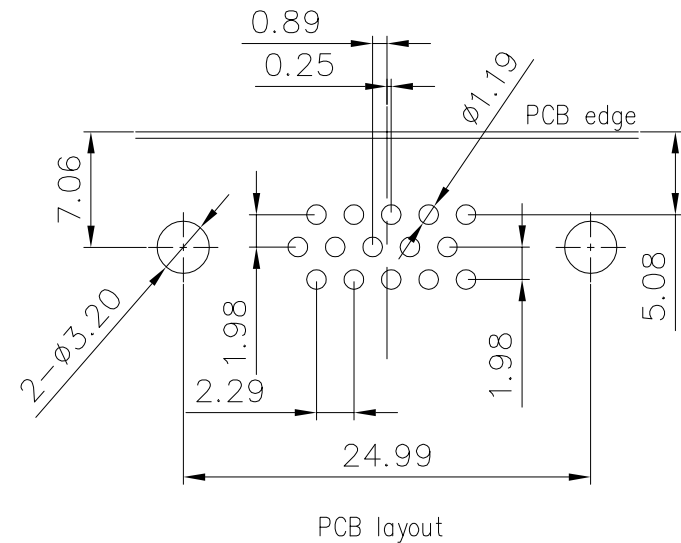
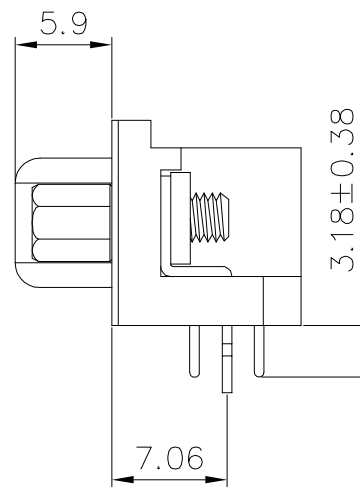


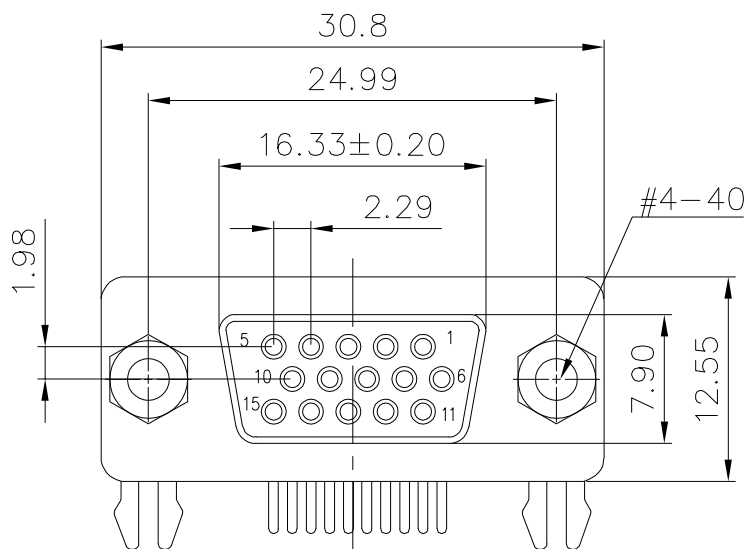

Current rating: 3A
Withstanding voltage: 1000V AC
Insulation resistance: 1000MΩ Min.
Temperature range: -45°C to +105°C
ROHS compliant

6	Board lock	SPCC	Palting: Sn
5	Nut	Steel	Palting: Ni
4	Shell	SPCC	Palting: Ni
3	Cover	PBT+30%GF	Color: black
2	Housing	PBT+30%GF	Color: black
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2021/06/11	Change part number	Jack Chen
△	2011/03/07	First edition release	Jing Li
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS
□: ☒:
CRITICAL MAJOR
▽: ▽:
ZERO DEFECT S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25

NAME:		HD.D-SUB 15pin female right angle 5.08mm,riveting board lock,lock 4.8mm nut			PART NO.		B04-015611AD-E4	
REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO	
SCALE:	N:1	DATE:	2011/03/07	Huangmei	Jack Chen		B04-026	
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770			