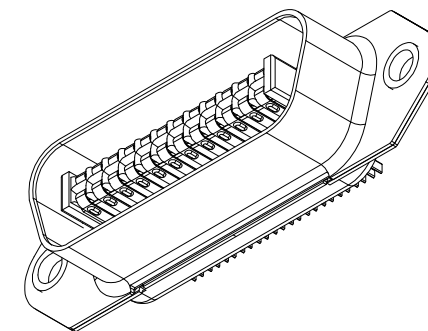
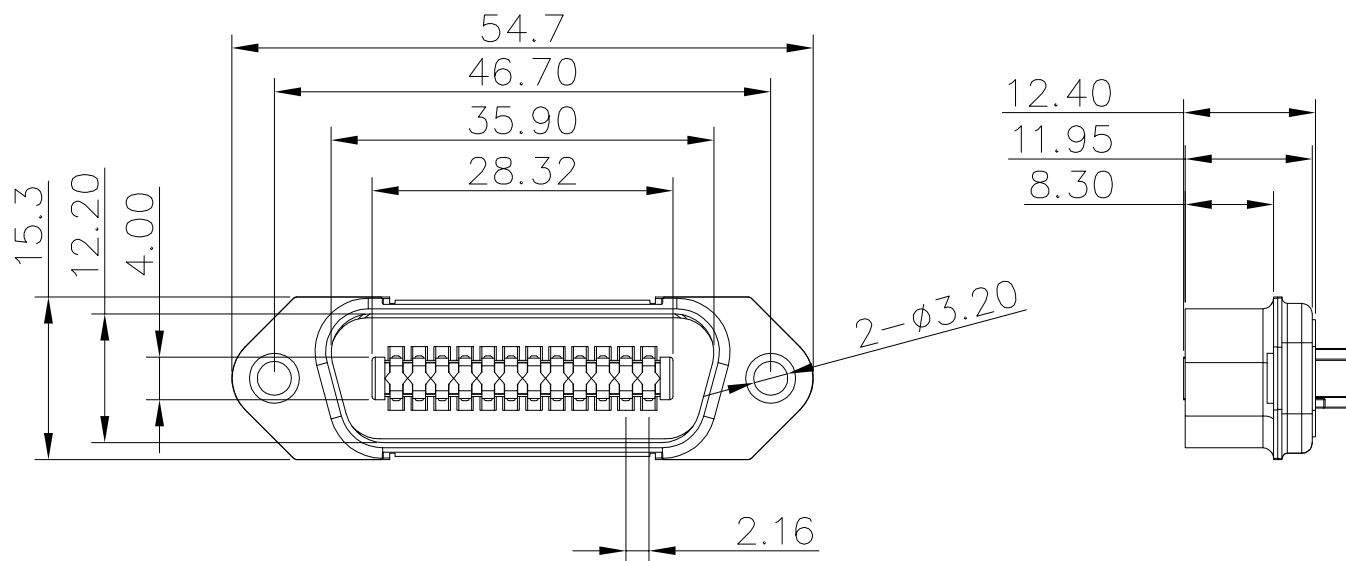


Current rating: 1A
Withstanding voltage: 250V AC
Contact resistance : 30mΩ max.
Insulation resistance: 1000MΩ Min.
Temperature range: -55℃ to +105℃
ROHS compliant
Part number:

B17-0243X1A0-M6

Housing color: _____
1: Black
6: Blue

3	Housing	PBT+G.F.30% (UL 94V-0)	Color: see part no.
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor copper	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2022/09/11	First edition release	Carl Hu
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

QUALITY SYMBOLS
□: CRITICAL
☒: MAJOR
▽: ZERO DEFECT
▽: S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25

NAME:	Centronics(57) 24pin male solder, traditional, flat shell				PART NO.	B17-0243X1A0-M6		
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2022/09/11	Huangmei	Carl Hu		B17-046	
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770			