
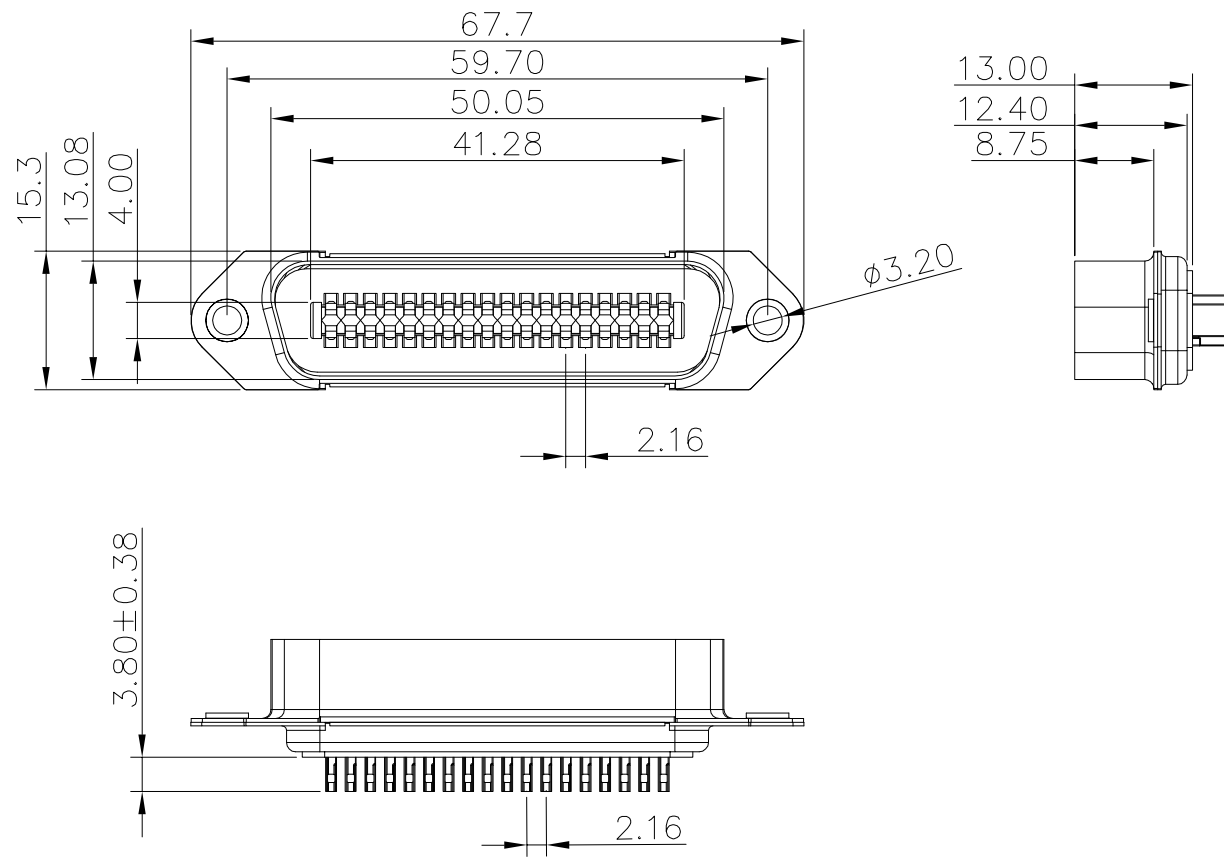


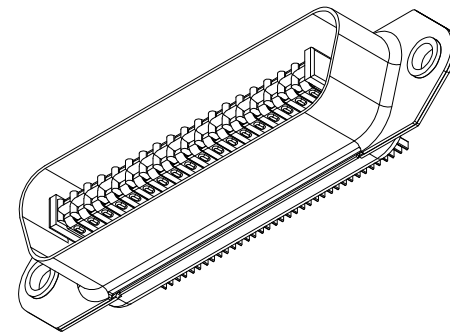

Current rating: 1A
Withstanding voltage: 250V AC
Contact resistance : 30m Ω max.
Insulation resistance: 1000M Ω Min.
Temperature range: -55 $^{\circ}$ C to +105 $^{\circ}$ C
ROHS compliant
Part number:

B17-0363X1A0-M6

Housing color: _____
1: Black
6: Blue

3	Housing	PBT+G.F.30% (UL 94V-0)	Color: see part no.
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor copper	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

	2022/09/11	First edition release	Carl Hu
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	

QUALITY SYMBOLS		Tolerance	
		x.	± 0.60
CRITICAL	MAJOR	.x	± 0.40
		.xx	± 0.25
ZERO DEFECT	S.P.C		

NAME:		Centronics(57) 36pin male solder, traditional,flat shell			PART NO.		B17-0363X1A0-M6	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2022/09/11	Huangmei	Carl Hu		B17-045	
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770			