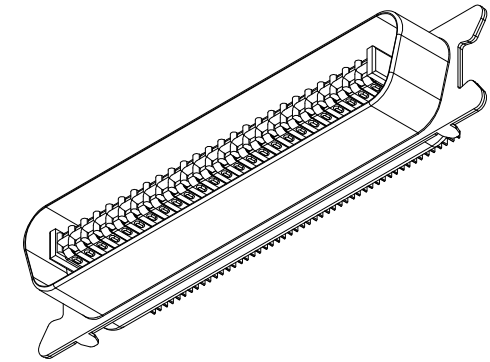

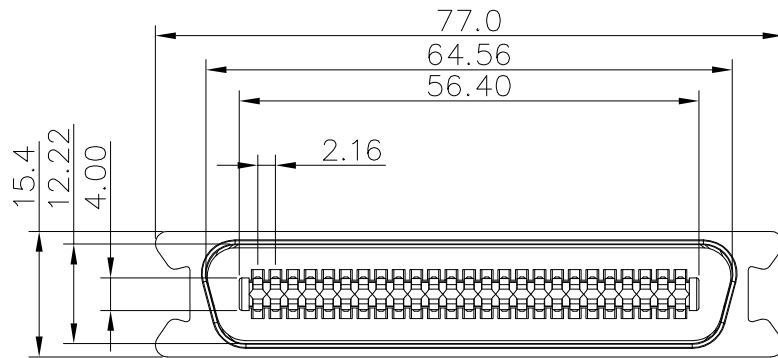


Current rating:1A
Withstanding voltage:250V AC
Contact resistance : 30mΩ max.
Insulation resistance:1000MΩ Min.
Temperature range: -55℃ to +105℃
ROHS compliant
Part number:

B17-0503X1A0-M2

Housing color: _____
1: Black
6: Blue

3	Housing	PBT+G.F.30% (UL 94V-0)	Color:see part no.
2	Shell	SPCC	Plating:Ni
1	Terminal	Phosphor copper	Contact area:G/F Solder area:Sn Under-plating:Ni
Item	Desc.	Material	Remark

△	2021/07/28	First edition release	Carl Hu
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

QUALITY SYMBOLS
□: ☒: CRITICAL MAJOR
▽: ▽: ZERO DEFECT S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25

NAME:	Centronics(57) 50pin male solder, traditional,MD type			PART NO.	B17-0503X1A0-M2		
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2021/07/28	Huangmei	Carl Hu		B17-034
lineconn 东莞市林诚塑胶电子有限公司				http://www.lineconn.com TEL:0769-85181660 85181770			