

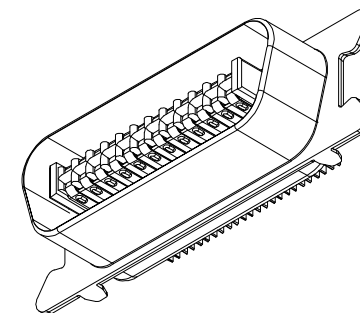
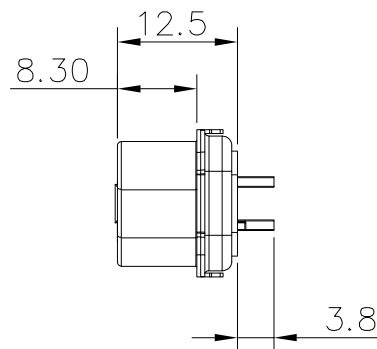


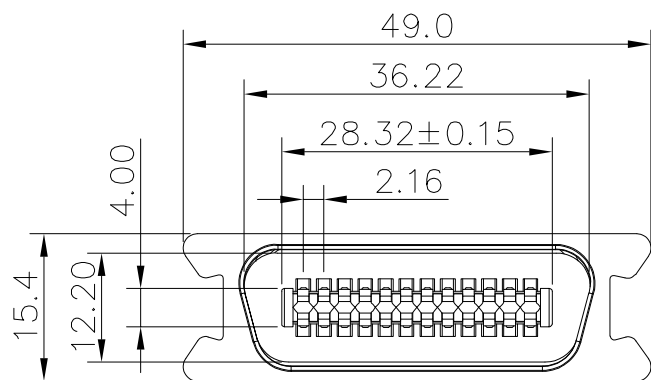

Current rating: 5A
Withstanding voltage: 250V AC
Contact resistance : 30mΩ max.
Insulation resistance: 1000MΩ Min.
Temperature range: -55℃ to +105℃
ROHS compliant
Part number:

B17-0243X1A0-M2

Housing color: _____
1: Black
6: Blue

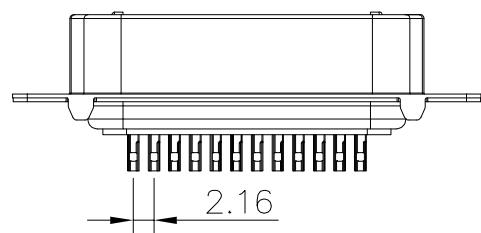

3	Housing	PBT+G.F.30% (UL 94V-0)	Color: see part no.
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor copper	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2022/08/23	First edition release	Carl Hu
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	


QUALITY SYMBOLS

□: ☒: CRITICAL MAJOR

▽: ▽: ZERO DEFECT S.P.C

Tolerance

x. ±0.60
.x ±0.40
.xx ±0.25



NAME:

Centronics(57) 24pin male solder,
traditional,MD type

REV:

A UNIT: mm DRW BY

SCALE:

N:1 DATE: 2022/08/23 Huangmei

PART NO.

B17-0243X1A0-M2

CHK BY

Carl Hu

APP BY

DRAWING NO.

B17-039

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL:0769-85181660 85181770