
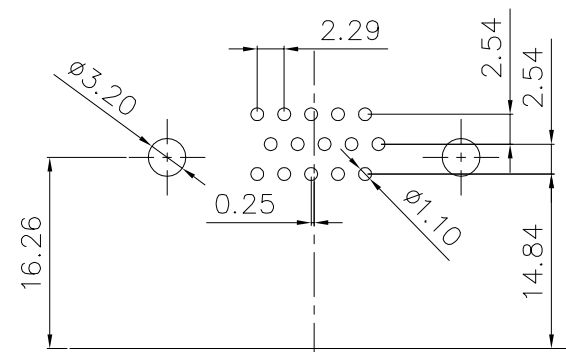
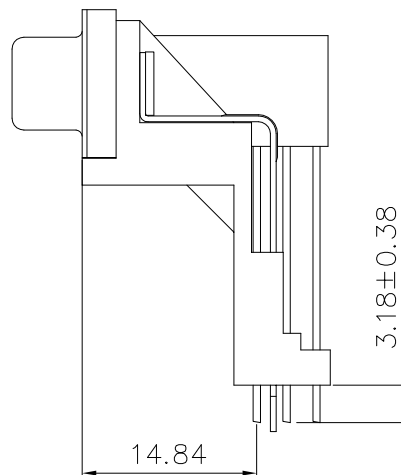


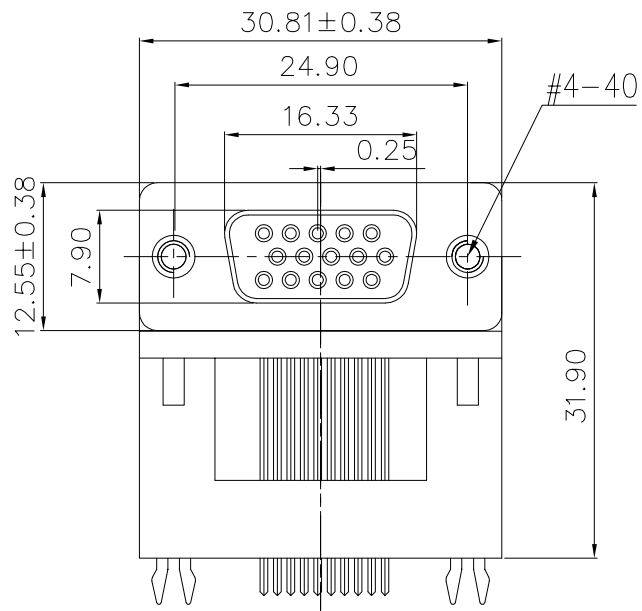


PCB layout

Current rating: 3A
Withstanding voltage: 1000V AC
Insulation resistance: 1000MΩ Min.
Temperature range: -45°C to +105°C
ROHS compliant
Part number:

B04-0156X1AD-H0

Housing color: _____

1: black
5: white
6: blue

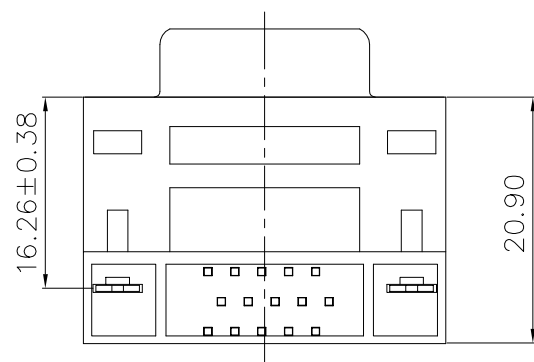

6	Board lock	SPCC	Palting: Sn
5	Rivet	Copper alloy	Palting: Sn
4	Shell	SPCC	Palting: Ni
3	Cover	PBT+30%GF	Color: see part no.
2	Housing	PBT+30%GF	Color: see part no.
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2021/07/02	Change part number	Jack Chen
△	2013/10/17	Revised color descriptions for plastic materials	Jack Chen
△	2011/03/07	First edition release	Jing Li


SIDE	DATE	DESCRIPTION	APPROVER
------	------	-------------	----------

QUALITY SYMBOLS

□: ☒:
CRITICAL MAJOR
▽: ▽:
ZERO DEFECT S.P.C

Tolerance

.x ±0.60
.x ±0.40
.xx ±0.25



NAME: HD.D-SUB 15pin female right angle
H=31.9mm,DIP 14.84mm

REV:	F	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2011/03/07	Huangmei	Jack Chen		B04-027

lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
TEL:0769-85181660 85181770