
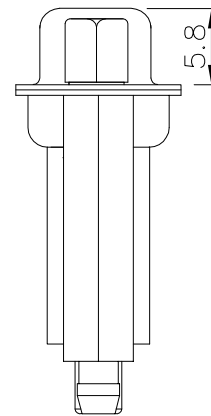


No.of contact	A	B	C	D
09	16.33	24.99	30.81	18.9
15	24.66	33.32	39.20	27.5
25	38.38	47.04	53.05	41.3
37	54.84	63.50	69.40	57.7

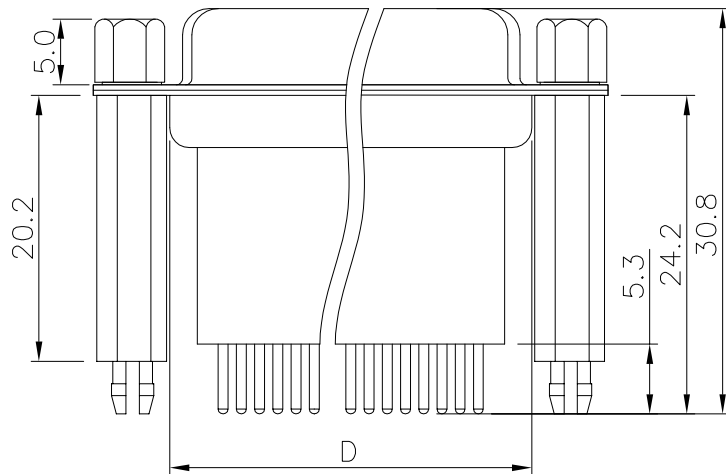

Current rating: 3A
Withstanding voltage: 1000V AC
Insulation resistance: 1000M Ω Min.
Temperature range: -45°C to +105°C
ROHS compliant

Part number: B05-0XX811AD-G5



No. of contact: _____

09:09P

15:15P

25: 25P

37:37P

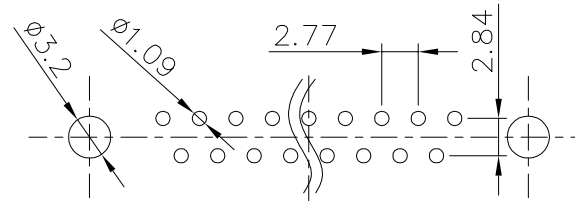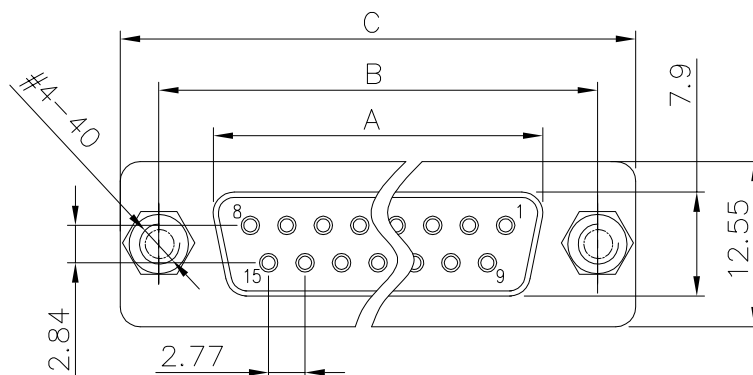

PCB layout

7	Board lock	Copper alloy	Palting: Sn
6	Nut	Steel	Palting: Ni
5	Rear shell	SPCC	Palting: Sn
4	Front shell	SPCC	Palting: Ni
3	Rear housing	PBT+30%GF	Color: black
2	Front housing	PBT+30%GF	Color: black
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

				QUALITY SYMBOLS	Tolerance	NAME: D-SUB female vertical for PCB,rear riveted 20.2mm board lock,front lock nut				PART NO.		B05-0XX811AD-G5	
	2021/07/05	Change part number	Jack Chen	 :  :	x. ±0.60	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
	2018/05/30	First edition release	Jing Li	CRITICAL MAJOR	.x ±0.40	SCALE:	N:1	DATE:	2018/05/30	Huangmei	Jack Chen		B05-095
SIDE	DATE	DESCRIPTION	APPROVER	 :  : ZERO DEFECT S.P.C	 	lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com							
						TEL:0769-85181660 85181770							