
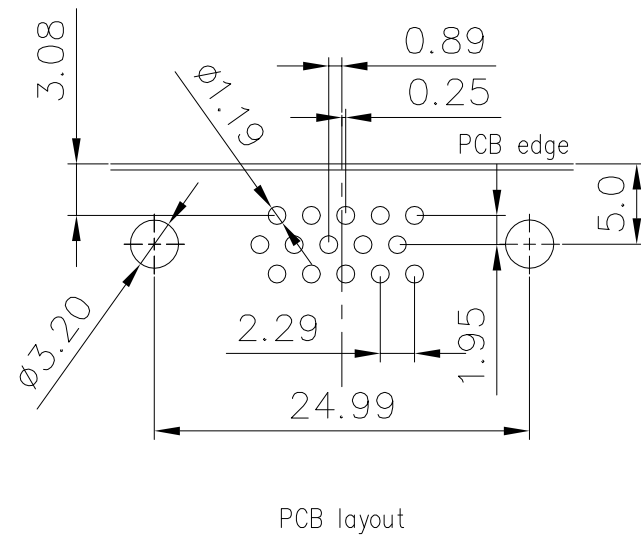
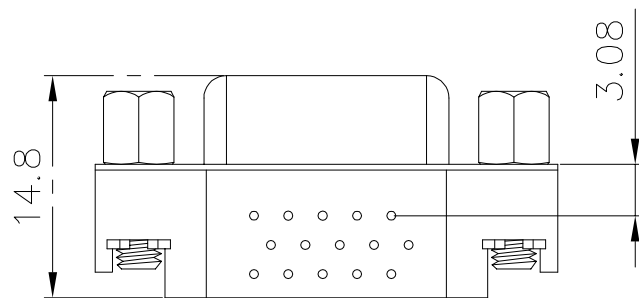


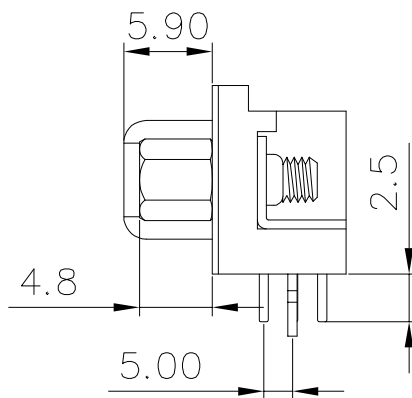

Current rating: 3A
Withstanding voltage: 1000V AC
Insulation resistance: 1000M Ω Min.
Temperature range: -45°C to +105°C
ROHS compliant

6	Board lock	SPCC	Palting: Sn
5	Nut	Steel	Palting: Ni
4	Shell	SPCC	Palting: Ni
3	Cover	PBT+30%GF	Color: black
2	Housing	PBT+30%GF	Color: black
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

				QUALITY SYMBOLS	Tolerance	NAME:	HD.D-SUB 15pin female right angle 3.08mm, riveting board lock, lock 4.8mm nut				PART NO.	B04-015611AD-G4	
	2021/06/11	Change part number	Jack Chen	☐ : ☒ :	x. ±0.60	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
	2011/03/07	First edition release	Jing Li	CRITICAL MAJOR	.x ±0.40	SCALE:	N:1	DATE:	2011/03/07	Huangmei	Jack Chen		B04-026
SIDE	DATE	DESCRIPTION	APPROVER	☒ : ☐ : ZERO DEFECT S.P.C		东莞市林诚塑胶电子有限公司				http://www.lineconn.com TEL: 0769-85181660 85181770			

lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
TEL:0769-85181660 85181770