

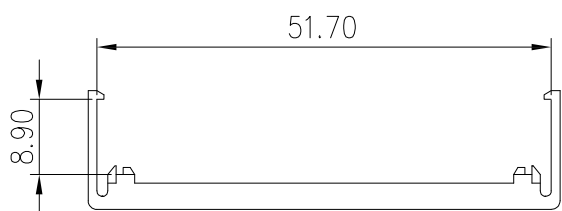
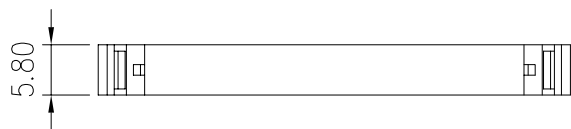

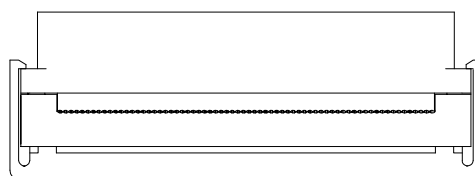



Cover

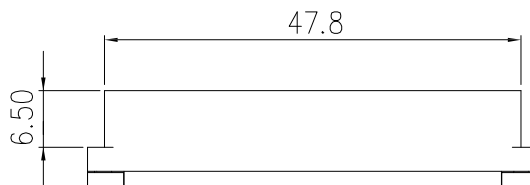

Strain relief

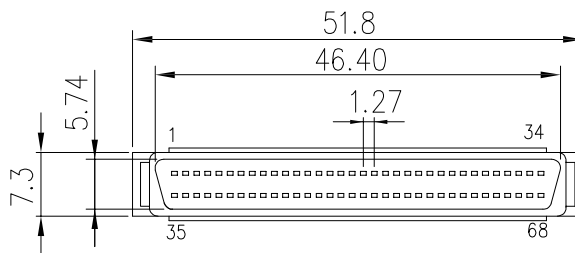

Current rating: 1 AMP.
Withstanding voltage: 500V AC
Insulation resistance: 500M Ω Min.
Contact resistance: 35m Ω max.
Temperature range: -55 $^{\circ}$ C to +125 $^{\circ}$ C
ROHS compliant

3	Cover	PBT+G.F.30% (UL 94V-0)	Color: black
2	Housing	PBT+G.F.30% (UL 94V-0)	Color: black
1	Terminal	Copper alloy	Contact area: G/F Solder area: Ni Under-plating: Ni
Item	Desc.	Material	Remark

	2022/01/06	Change terminal plating	Shuo Cao
	2021/09/07	Changed the part number	Shuo Cao
	2013/03/12	First edition release	Dean Fan

QUALITY SYMBOLS

: :


CRITICAL MAJOR

: :

ZERO DEFECT S.P.C

Tolerance

x.	± 0.60
.x	± 0.40
.xx	± 0.25



NAME:	HPDB 68pin male all plastic IDC for flat cable				PART NO.	B02-06811NAN-00		
REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2013/03/12	Huangmei	Shuo Cao		B02-048	

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL:0769-85181660 85181770

SIDE	DATE	DESCRIPTION	APPROVER
------	------	-------------	----------