
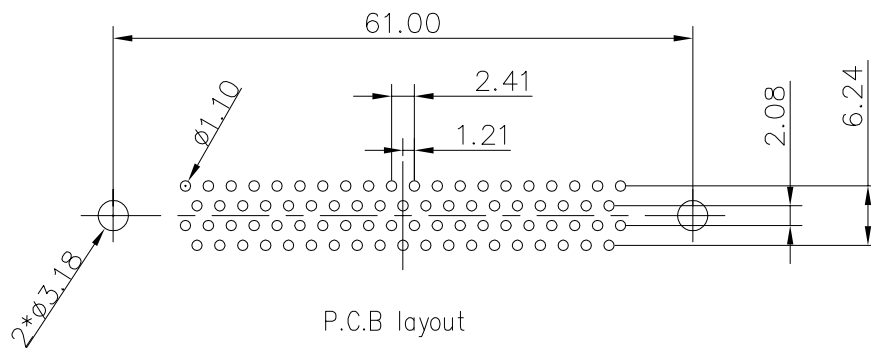

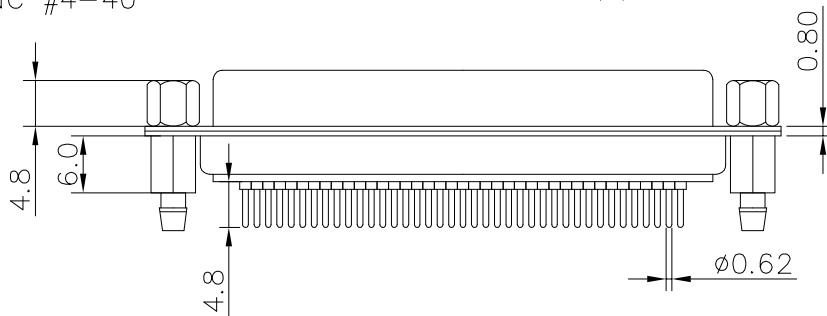


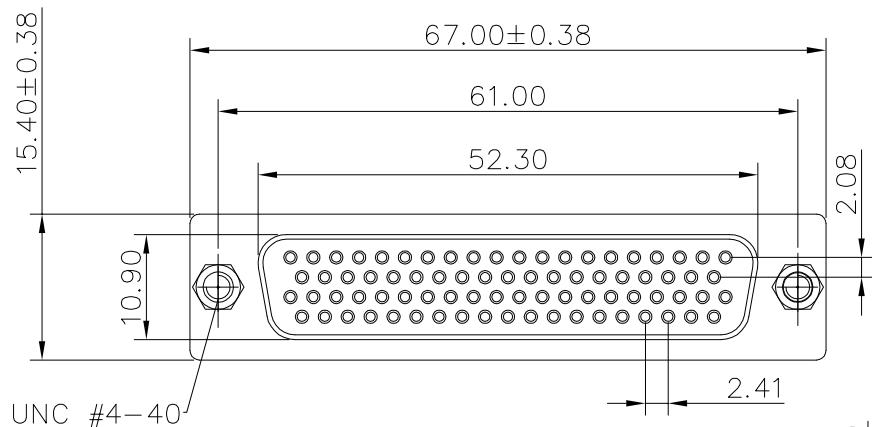

Current rating: 5 AMP.
Withstanding voltage: 1000V AC
Insulation resistance: 5000M Ω Min.
Contact resistance: 30 m Ω max.
Temperature range: -55°C to +105°C
Durability: 500 cycles
ROHS compliant

Part No.:

B04-0788X1XD-02

Housing color:

1: Black

5: White

6: Blue

Terminal plating:

4: Full Au 2u"

5: Full Au 1u"

6	Board lock	copper alloy	Plating: Sn
5	Nut	Steel	Plating: Ni
4	Rear shell	SPCC	Plating: Sn
3	Front shell	SPCC	Plating: Ni
2	Housing	PBT UL94V-0	Color: see part no.
1	Terminal	copper alloy	Plating: see part no.
Item	Desc.	Material	Remark

△	2023/07/26	Change tolerance Added the terminal plating type	Jack Chen
△	2023/03/08	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□:	☒:	x. ±0.60	
CRITICAL	MAJOR	.x ±0.40	
▽:	▽:	.xx ±0.25	
ZERO DEFECT	S.P.C		

NAME:		HD.D-SUB machined pin 78pin female vertical for PCB			PART NO.		B04-0788X1XD-02	
REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2023/03/08	Huangmei	Jack Chen		B04-156	
 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770			