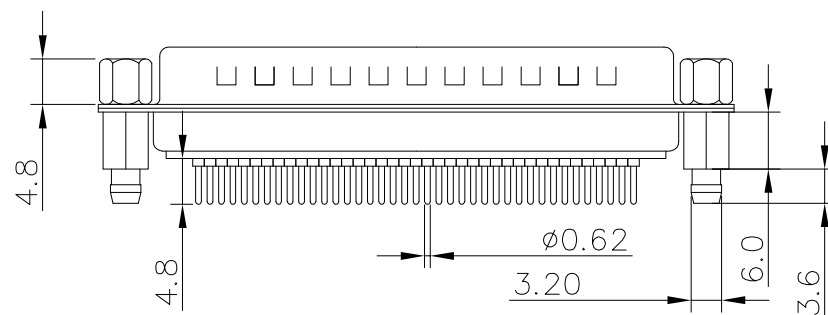
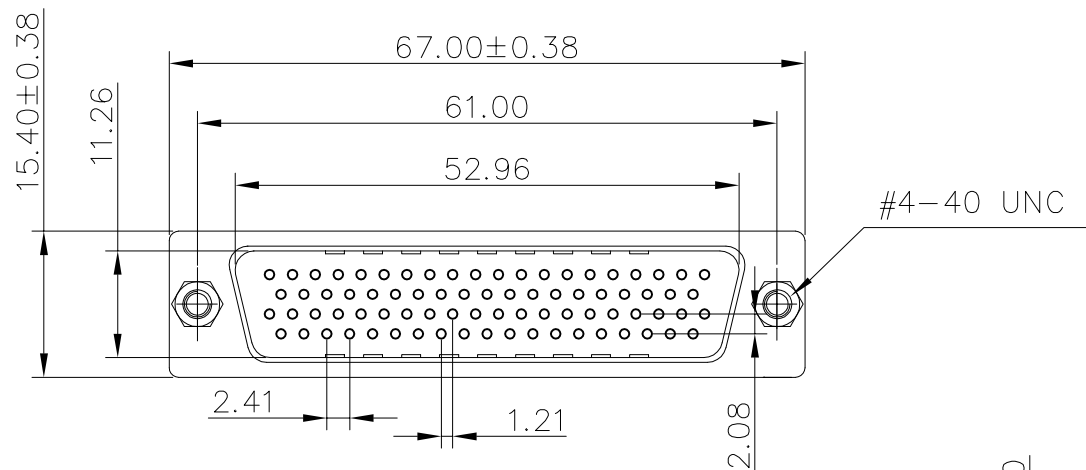


Current rating: 5 AMP.
Withstanding voltage: 1000V AC
Insulation resistance: 5000MΩ Min.
Contact resistance: 30 mΩ max.
Temperature range: -55℃ to +105℃
Durability: 500 cycles
ROHS compliant

Part number:

B04-0787X1XD-02

Housing color:

1: Black


5: White

6: Blue

Terminal plating:-

4: Full Au 2u"

5: Full Au 1u"

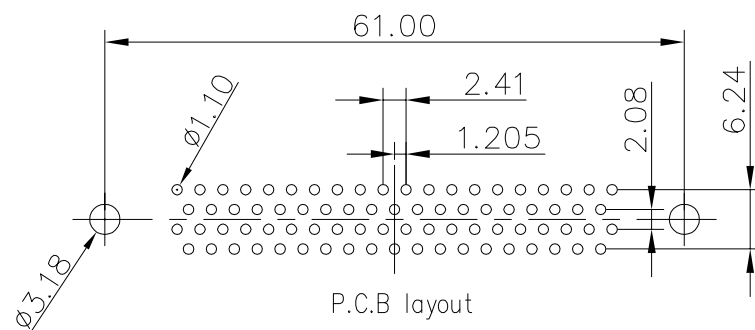

6	Board lock	copper alloy	Plating: Sn
5	Nut	Steel	Plating: Ni
4	Rear shell	SPCC	Plating: Sn
3	Front shell	SPCC	Plating: Ni
2	Housing	PBT UL94V-0	Color: see part no.
1	Terminal	copper alloy	Plating: see part no.
Item	Desc.	Material	Remark

			QUALITY SYMBOLS	Tolerance		NAME: HD.D-SUB machined pin 78pin male vertical for PCB				PART NO.		B04-0787X1XD-02	
			□: ☒:	x. ±0.60		REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
			CRITICAL MAJOR	.x ±0.40		SCALE:	N:1	DATE:	2023/03/08	Huangmei	Jack Chen		B04-155
			▽: ▽:	.xx ±0.25		 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770							
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C									
	2023/03/08	First edition release	Jack Chen										

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL:0769-85181660 85181770