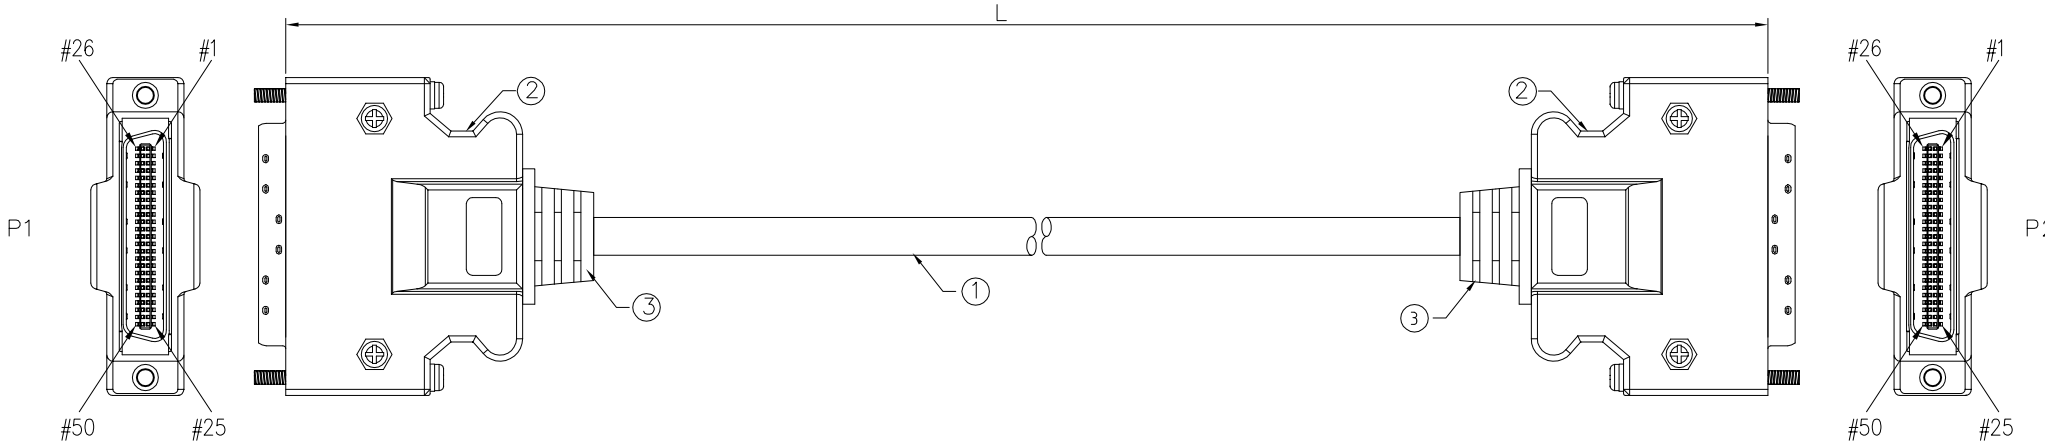


Notes:
1.Electrical test:100% open,short&miss wire test.
2.Conductor resistance:5 ohms max.
3.Insulator resistance: 1m ohms min, dc 300v 0.01sec.
4.ROHS compliant
5.Part number description: A07-05011XXX-04,
XXX: 001=length:10cm

4	Tube	Tube $\varnothing$ 1.0*9mm black	
3	Overmold	Black PVC 45P	
2	Connector	SM 50pin male solder ass'y type,black	2set
1	Cable	UL20276 28AWG*25pair+ADB,jacket:PVC color:black,OD=8.5mm	NA
Item	Part name	Description	QY'T

				QUALITY SYMBOLS	Tolerance		NAME: SM 50pin male to male cable			PART NO. A07-05011XXX-04		
				☐ : ☒ :	Length(mm)	Tolerance(mm)	REV:	A	UNIT:	mm	DRW BY	CHK BY
				CRITICAL MAJOR	300~2000	$\pm$ 50						APP BY
				☒ : ☒ :	2001~5000	$\pm$ 100	SCALE:	NONE	DATE:	2021/01/08	Huangmei	Jack Chen
				ZERO DEFECT S.P.C	5001~	$\pm$ 150						DRAWING NO. A07-015
SIDE	DATE	DESCRIPTION	APPROVER				lineconn 东莞市林诚塑胶电子有限公司			http://www.lineconn.com		
										TEL:0769-85181660 85181770		