




P1

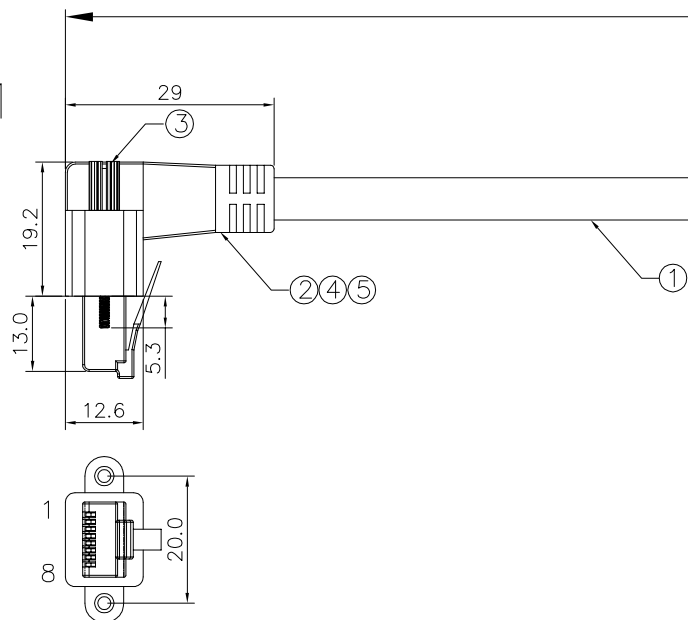

Connection

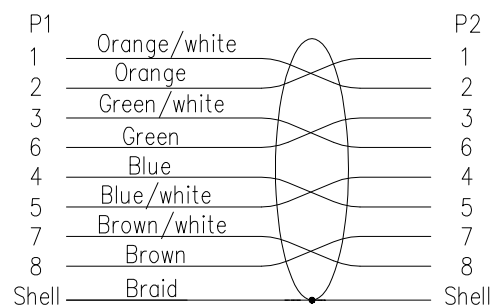

P2

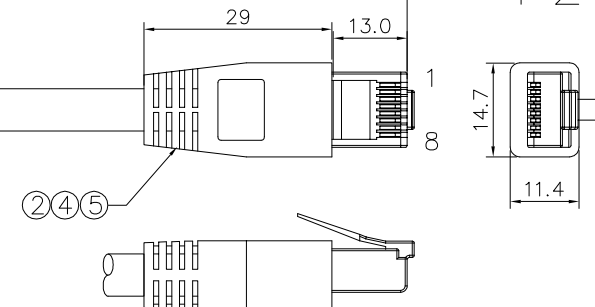

Notes:

- 1.Electrical test:100% open,short&miss wire test.
- 2.Conductor resistance:5 ohms max.
- 3.Insulator resistance: 1m ohms min, dc 300v 0.01sec.
- 4.ROHS compliant
- 5.Part no. description:A10-0081X XXX-XX, XXX: 001=length:10cm

Model number	Wire	Length(dm)
A10-00811XXX-08	Black ordinary cable 4P*24AWG OD 6.0mm	XXX: 001=1dm XXX: 010=10dm
A10-00811XXX-A8	Black flexible cable 4P*24AWG OD 6.0mm	
A10-00813XXX-08	Green ordinary cable 4P*24AWG OD 6.0mm	
A10-00813XXX-A8	Green flexible cable 4P*24AWG OD 6.0mm	
A10-00811XXX-A9	Black flexible cable 4P*26AWG OD 6.0mm	
A10-00818XXX-09	Yellow ordinary cable 4P*26AWG OD 6.5mm	

5	Overmold	PVC 45P color:black	NA
4	Mold	LDPE,transparent	NA
3	Screw	5*24 screw M2.0	2PCS
2	Connector	RJ45 connector,8P8C,with sheel	2PCS
1	Cable	Gigabit industrial network cable 4p, double shielded,flexible cable	NA
Item	Part name	Description	QY'T

△				QUALITY SYMBOLS □: ☒: CRITICAL MAJOR ▽: ▽: ZERO DEFECT S.P.C	Tolerance		NAME:		Gigabit Ethernet cable 8P8C male to male,molded type			PART NO.		A10-0081X XXX-XX	
△	2022/11/24	Added cable type	Jack Chen		Length(mm)	Tolerance(mm)	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
△	2018/09/11	First edition release	Jing Li		300~2000	±50	SCALE:	NONE	DATE:	2018/09/11	Huangmei	Jack Chen			
					2001~5000	±100									
SIDE	DATE	DESCRIPTION	APPROVER			5001~	±150	Lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770							

lineconn 东莞市林诚塑胶电子有限公司

<http://www.lineconn.com>
TEL:0769-85181660 85181770