



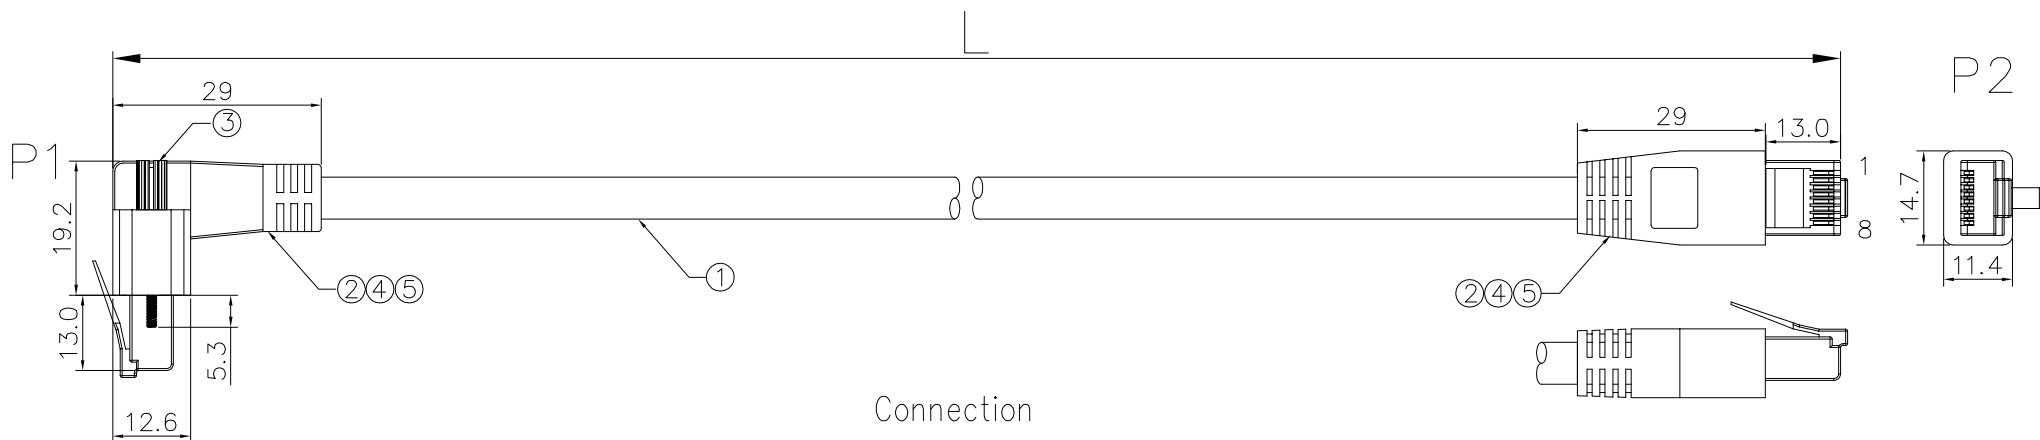

Connection

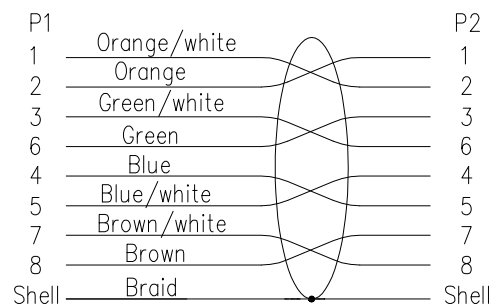

Model number	Wire	Length(dm)
A10-00811XXX-06	Black ordinary cable 4P*24AWG OD 6.0mm	XXX: 001=1dm XXX: 010=10dm
A10-00811XXX-A6	Black flexible cable 4P*24AWG OD 6.0mm	
A10-00813XXX-06	Green ordinary cable 4P*24AWG OD 6.0mm	
A10-00813XXX-A6	Green flexible cable 4P*24AWG OD 6.0mm	
A10-00811XXX-A7	Black flexible cable 4P*26AWG OD 6.0mm	
A10-00818XXX-07	Yellow ordinary cable 4P*26AWG OD 6.5mm	

Notes:

- 1.Electrical test:100% open,short&miss wire test.
- 2.Conductor resistance:5 ohms max.
- 3.Insulator resistance: 1m ohms min, dc 300v 0.01sec.
- 4.ROHS compliant
- 5.Part no. description: A10-0081X XXX-XX,
XXX: 001=length: 10cm

5	Overmold	PVC 45P color:black	NA
4	Mold	LDPE,transparent	NA
3	Screw	5*24 screw M2.0	2PCS
2	Connector	RJ45 connector,8P8C,with sheel	2PCS
1	Cable	Gigabit industrial network cable 4p, double shielded,flexible cable	NA
Item	Part name	Description	QY'T

A	△			QUALITY SYMBOLS	Tolerance		NAME:	Gigabit Ethernet cable 8P8C male to male,molded type				PART NO.	A10-0081X XXX-XX		
	△	2022/11/24	Added cable type	Jack Chen	□:	☒:	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
	△	2018/09/11	First edition release	Jing Li	CRITICAL	MAJOR	SCALE:	NONE	DATE:	2018/09/11	Jing Li	Jack Chen		A10-013	
	SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT	S.P.C									
		8	7	6	5	4									1