
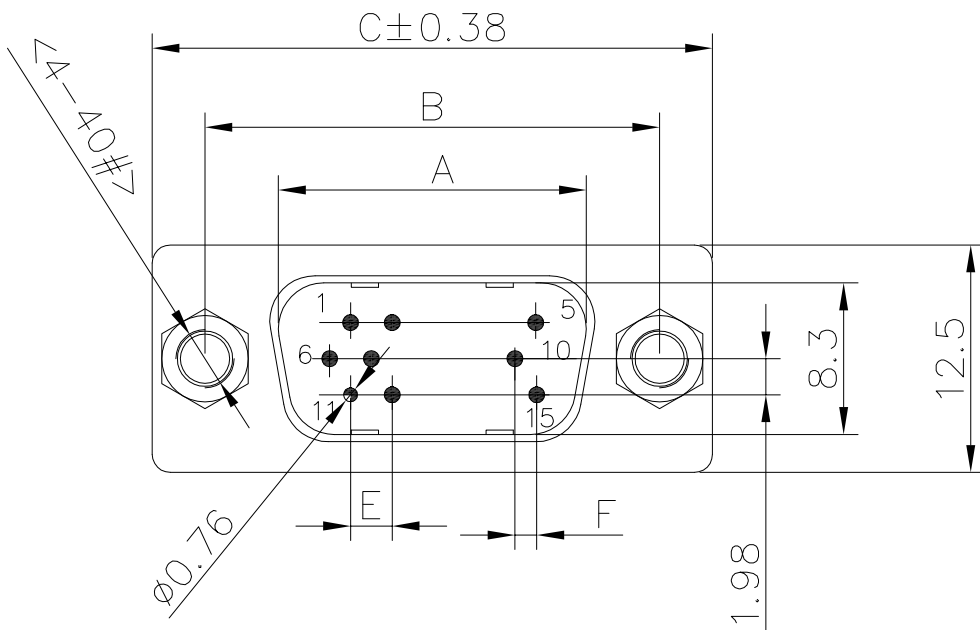
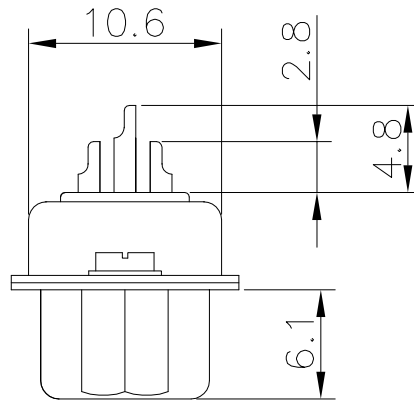


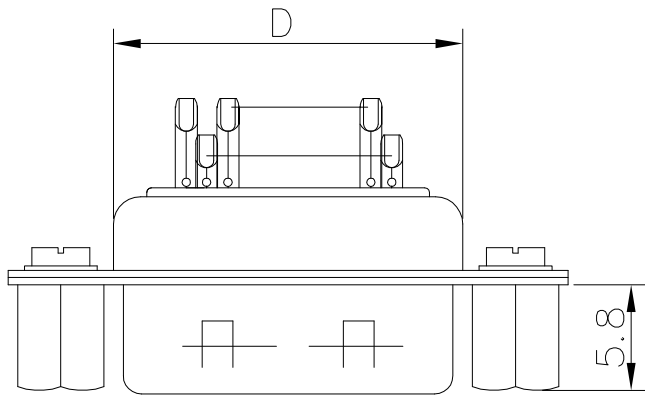

No.of contact	A	B	C	D	E	F
15	16.92	24.99	30.81	18.9	2.29	1.145
26	25.25	33.32	39.20	27.5	2.29	1.145
44	38.96	47.04	53.05	41.3	2.29	1.145
62	55.42	63.50	69.40	57.7	2.41	1.205

△Current rating: 3A
Withstanding voltage: 1000V AC
Insulation resistance: 1000MΩ Min.
Temperature range: -45℃ to +105℃
ROHS compliant

Part number:
B04-0XX3X1A0-E5

No.of contact: _____
15: 15pos
26: 26pos
44: 44pos
62: 62pos
Housing color: _____
1: Black
5: White
6: Blue

6	Nut	Steel	Palting: Ni
5	Rear shell	SPCC	Palting: Sn
4	Front shell	SPCC	Palting: Ni
3	Rear hsg	PBT+30%GF	Color: see part no.
2	Front hsg	PBT+30%GF	Color: see part no.
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn
Item	Desc.	Material	Remarks

△	2023/06/24	Changed electrical properties	Jack Chen
△	2023/06/16	Add dimension	Jack Chen
△	2009/09/04	First edition release	Jing Li

SIDE	DATE	DESCRIPTION	APPROVER
------	------	-------------	----------

QUALITY SYMBOLS	
□:	☒:
CRITICAL	MAJOR
▽:	▽:
ZERO DEFECT	S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25

NAME:	HD.D-SUB male solder, front riveted 5.8mm solid core nut				PART NO.	B04-0XX3X1A0-E5	
REV:	E	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2009/09/04	Huangmei	Jack Chen		B04-018

lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
TEL: 0769-85181660 85181770