

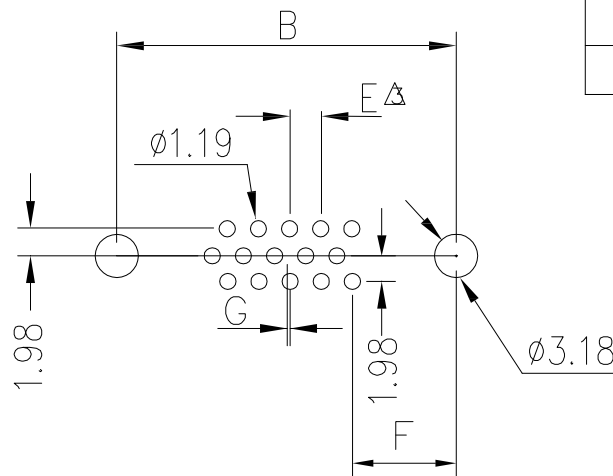
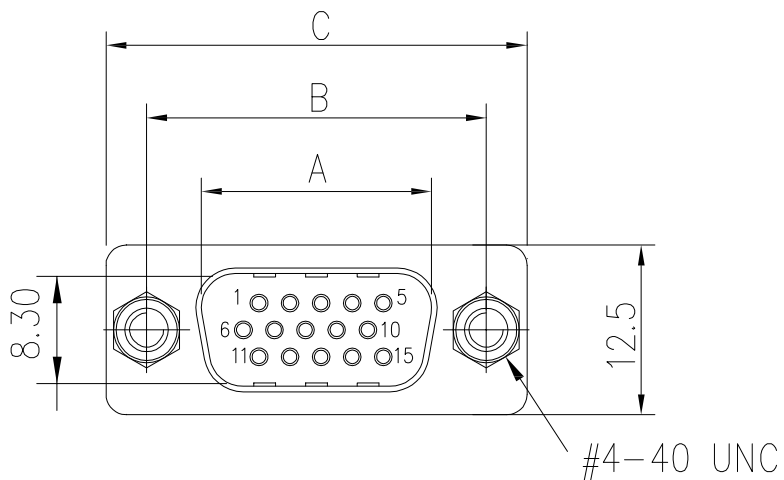


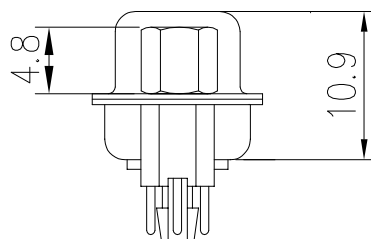

PCB layout

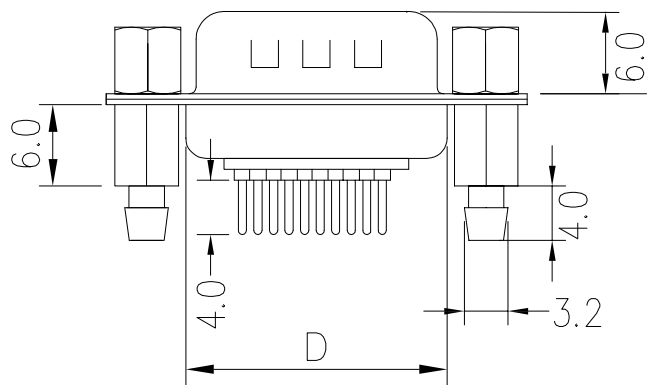

Pin No.	A	B	C±0.38	D	E	F	G
15	16.92	24.99	30.81	19.3	2.29	7.04	0.25
26	25.35	33.32	39.20	27.5	2.29	6.88	0.51
44	38.96	47.04	53.04	41.3	2.29	6.88	0.51
62	55.42	63.50	69.32	57.7	2.41	7.00	0.58

Current rating: 5A
Withstanding voltage: 1000V AC
Insulation resistance: 1000MΩ Min.
Temperature range: -55℃ to +105℃
ROHS compliant
Part No.:

B04-0XX7X1XD-02
No. of contact: _____
15: 15pos
26: 26pos
44: 44pos
62: 62pos
Housing color: _____
1: Black
5: White
6: Blue
Terminal plating: _____
4: Full Au 2u"
5: Full Au 1u"

6	Screw	Steel	Palting: Ni
5	Board lock	Copper alloy	Palting: Ni
4	Housing	PBT+30%GF	Color: see part no.
3	Rear shell	SPCC	Palting: Sn
2	Front shell	SPCC	Palting: Ni
1	Terminal	Copper alloy	Palting: see part no.
Item	Desc.	Material	Remarks

△	2025/02/17	Modify incorrect dimension annotations	Jack Chen
△	2024/10/23	Added dimension marking	Jack Chen
△	2021/08/16	First edition release	Jack Chen

SIDE	DATE	DESCRIPTION	APPROVER
------	------	-------------	----------

QUALITY SYMBOLS	
□:	☒:
CRITICAL	MAJOR
▽:	▽:
ZERO DEFECT	S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25
⊙	⊙

NAME:	HD.D-SUB machined pin male vertical				PART NO.	B04-0XX7X1XD-02	
REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2021/08/16	Huangmei	Jack Chen		B04-065
Lineconn 东莞市林诚塑胶电子有限公司				http://www.lineconn.com TEL:0769-85181660 85181770			