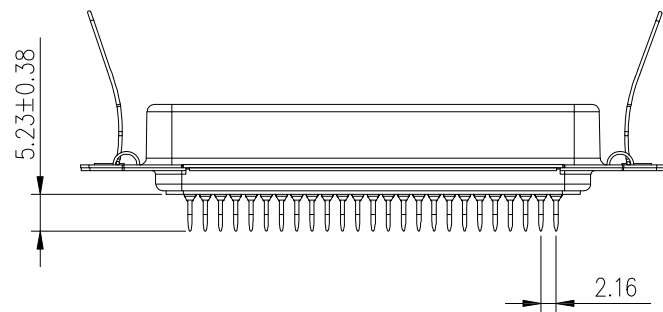
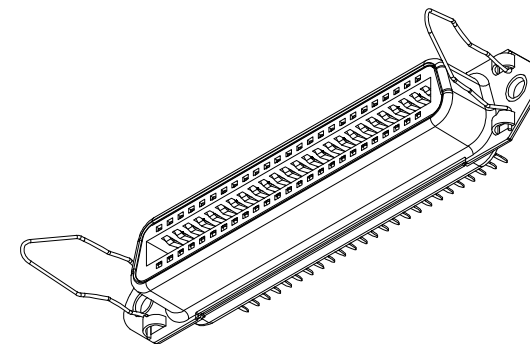

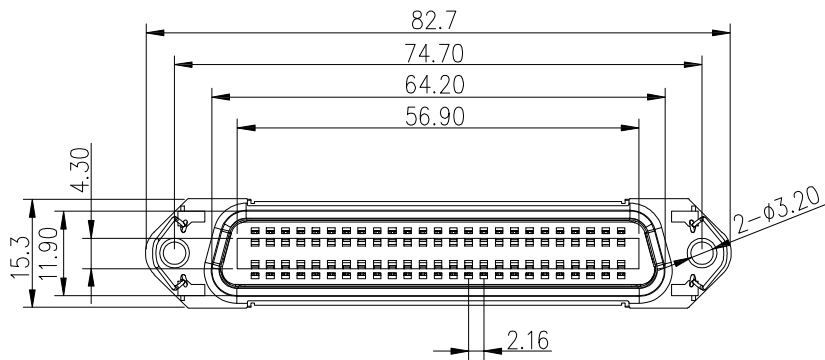


PCB layout

Current rating: 1A
Withstanding voltage: 250V AC
Contact resistance : 30mΩ max.
Insulation resistance: 1000MΩ Min.
△ Temperature range: -55℃ to +105℃
ROHS compliant
△ Part number:

B17-0508X1AN-C5

Housing color: _____
1: Black
6: Blue

4	Spring loaded buckle	Steel	Plating: Ni
3	Housing	PBT+G.F.30% (UL 94V-0)	Color: see part no.
2	Sheel	SPCC	Plating: Ni
1	Terminal	Phosphorous copper	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△ 2021/07/12 Change part number Jack Chen

△ 2019/11/04 Change temperature range King Zhou

△ 2016/09/29 First edition release King Zhou

SIDE DATE DESCRIPTION APPROVER

QUALITY SYMBOLS

□: □: .x ±0.60

CRITICAL MAJOR .x ±0.40

▽: ▽: .xx ±0.25


ZERO DEFECT S.P.C

Tolerance

.x ±0.60

.x ±0.40

.xx ±0.25



NAME:

Centronics(57) 50pin female vertical for PCB,with spring loaded buckle

REV:

E

SCALE:

N:1

UNIT:

mm

DATE:

2016/09/29

DRW BY

Huangmei

CHK BY

Jack Chen

APP BY

DRAWING NO.

B17-024

PART NO.

B17-0508X1AN-C5

DATE:

2016/09/29

DRW BY

Huangmei

CHK BY

Jack Chen

APP BY

DRAWING NO.

B17-024

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com

TEL:0769-85181660 85181770