
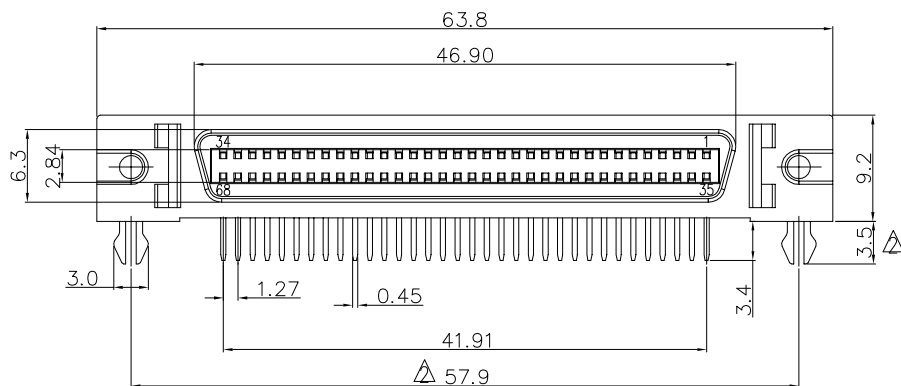
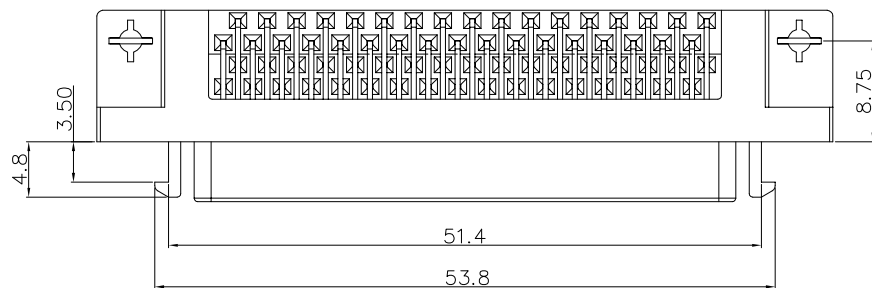


Voltage current rating:1 AMP.30V AC
Dielectric withstanding voltage:500V AC
Contact resistance:35 mΩ max.
ΔInsulation resistance:500MΩ min.
Temperature range:−45℃ to +125℃

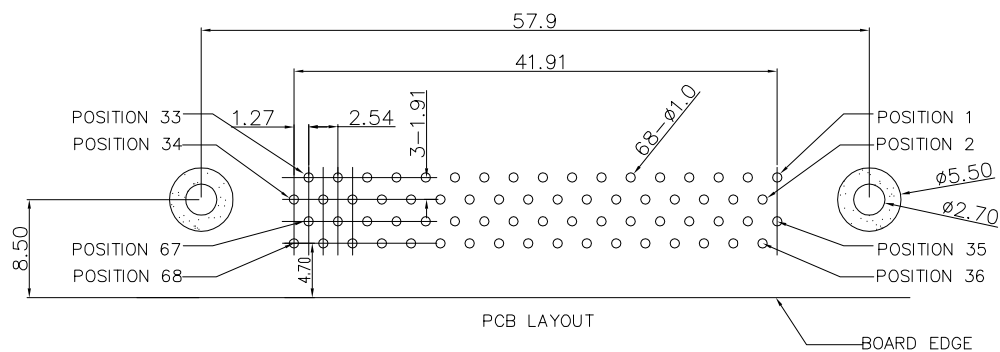

5	Board lock	Copper alloy	Plating: Sn
4	Cover	LCP+30%GF	Color: black
3	Housing	PBT+30%GF	Color: black
2	Shell	Zinc alloy	Plating: Ni
1	Terminal	Copper alloy T=0.3mm	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remaks

Δ	2025/02/19	Change insulation resistance	Jack Chen
Δ	2018/11/10	Change tolerance	Jack Chen
Δ	2015/04/09	First edition release	King Zhou


SIDE	DATE	DESCRIPTION	APPROVER
------	------	-------------	----------

QUALITY SYMBOLS

□: ☒:
CRITICAL MAJOR
▽: ▽:
ZERO DEFECT S.P.C

Tolerance

x. ±0.60
.x ±0.40
.xx ±0.25



NAME:	SCSI 68pin female right angle				PART NO.	B03-068618A7-01		
REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2015/04/09	Huangmei	Jack Chen		B03-006	

lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
TEL:0769-85181660 85181770