


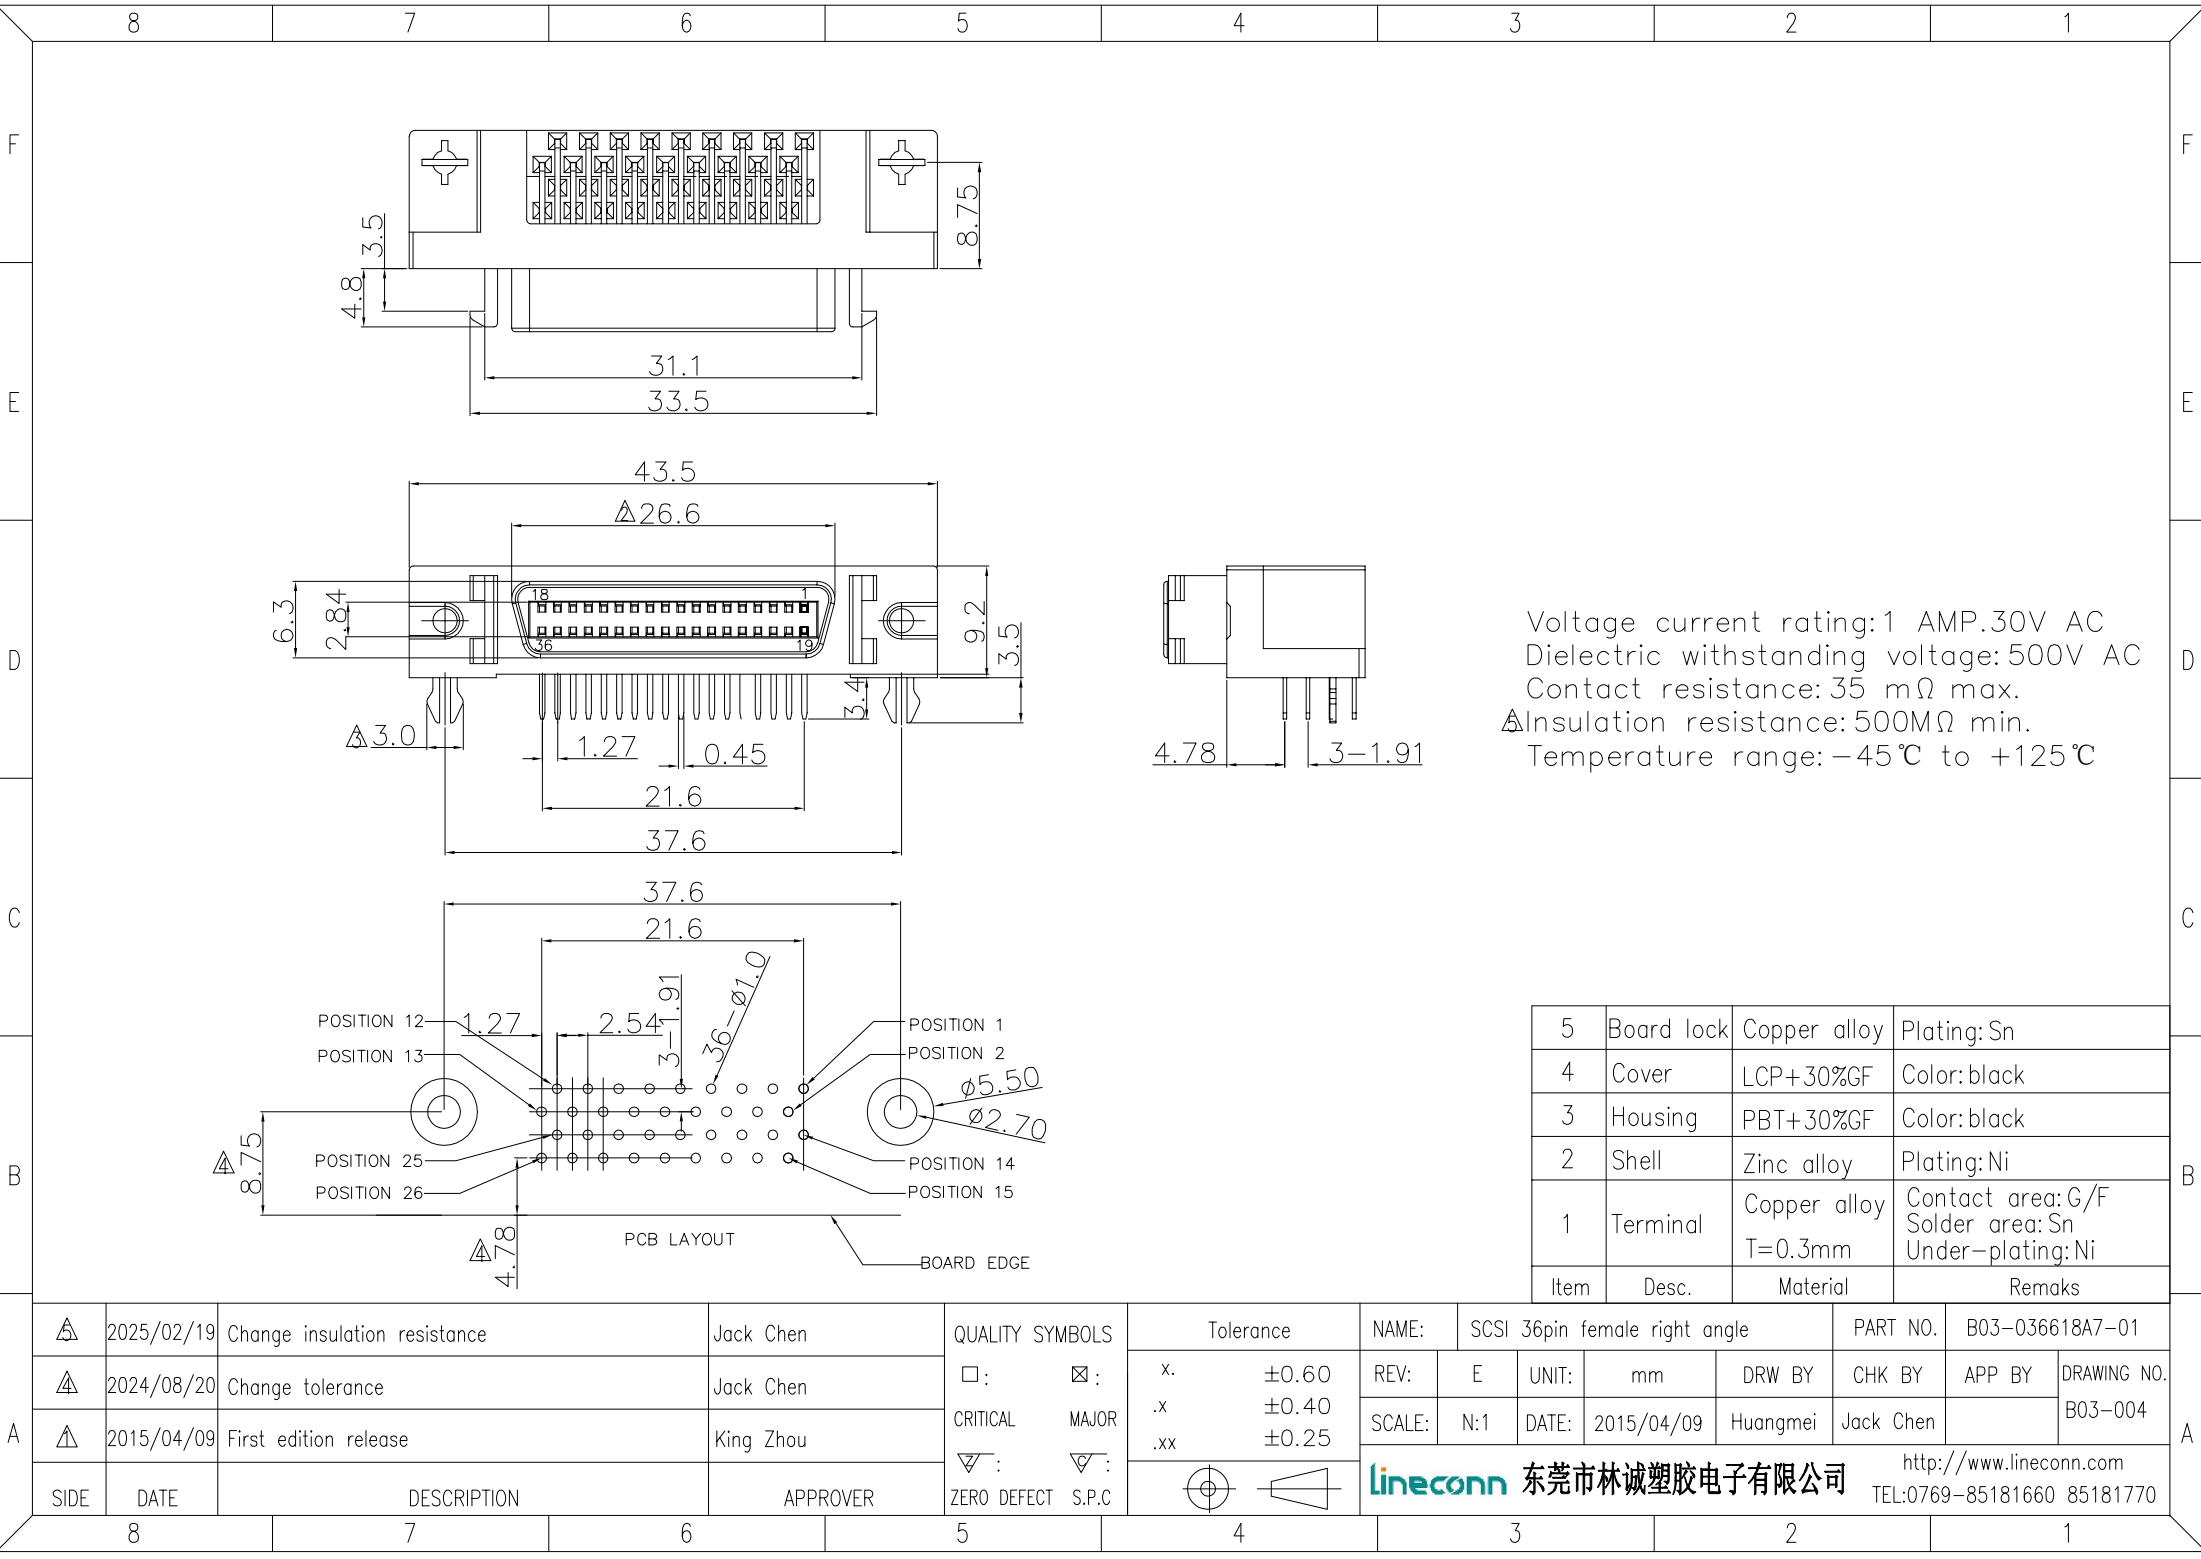

Voltage current rating:1 AMP.30V AC
Dielectric withstanding voltage:500V AC
Contact resistance:35 mΩ max.
Insulation resistance:500MΩ min.
Temperature range:-45℃ to +125℃

5	Board lock	Copper alloy	Plating:Sn
4	Cover	LCP+30%GF	Color:black
3	Housing	PBT+30%GF	Color:black
2	Shell	Zinc alloy	Plating:Ni
1	Terminal	Copper alloy T=0.3mm	Contact area:G/F Solder area:Sn Under-plating:Ni
Item	Desc.	Material	Remaks

A

	2025/02/19	Change insulation resistance	Jack Chen	QUALITY SYMBOLS □: ☒: CRITICAL MAJOR ▽: ▽: ZERO DEFECT S.P.C	Tolerance		NAME:	SCSI 36pin female right angle				PART NO.	B03-036618A7-01		
	2024/08/20	Change tolerance	Jack Chen		x. ±0.60 .x ±0.40 .xx ±0.25	REV:	E	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B03-004		
	2015/04/09	First edition release	King Zhou			SCALE:	N:1	DATE:	2015/04/09	Huangmei	Jack Chen				
SIDE	DATE	DESCRIPTION	APPROVER			lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770									

A