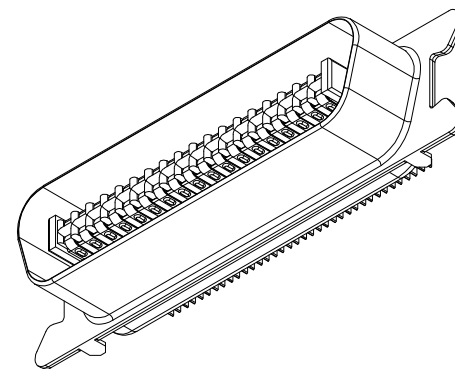
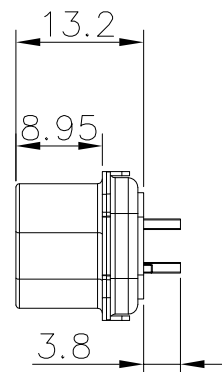
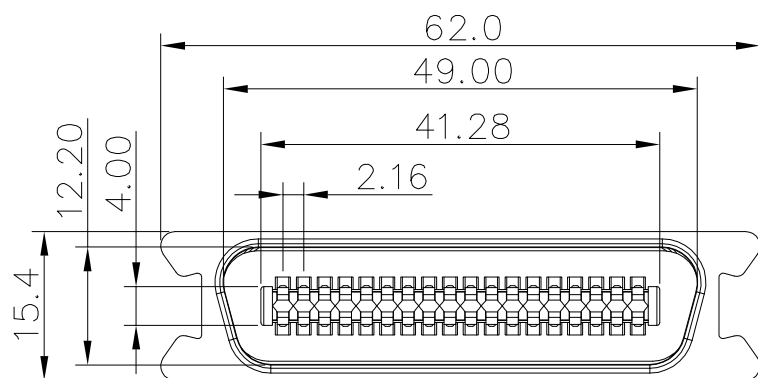


Current rating: 1 AMP.
Withstanding voltage: 250V AC
Insulation resistance: 500MΩ Min.
Contact resistance: 30mΩ/Max
Temperature range: -55℃ to +105℃
ROHS compliant
Part number:
B17-0363X1A0-M2
Housing color: _____
1: black
6: blue

	Housing	PBT	Color: see part no.
2	Shell	SPCC	Over-plating: Ni
1	Terminal	Phosphor bronze	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark


△	2021/04/27	First edition release	Carl Hu
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

QUALITY SYMBOLS

□: ☒:
CRITICAL MAJOR
▽: ▽:
ZERO DEFECT S.P.C

Tolerance

x. ±0.60
.x ±0.40
.xx ±0.25



NAME:

Centronics(57) 36pin male solder,
traditional,MD type

REV:

A

UNIT:

mm

DRW BY

CHK BY

APP BY

DRAWING NO.

SCALE:

N:1

DATE:

2021/04/27

Huangmei

Carl Hu

B17-025

lineconn 东莞市林诚塑胶电子有限公司

<http://www.lineconn.com>
TEL:0769-85181660 85181770

3

2

1