


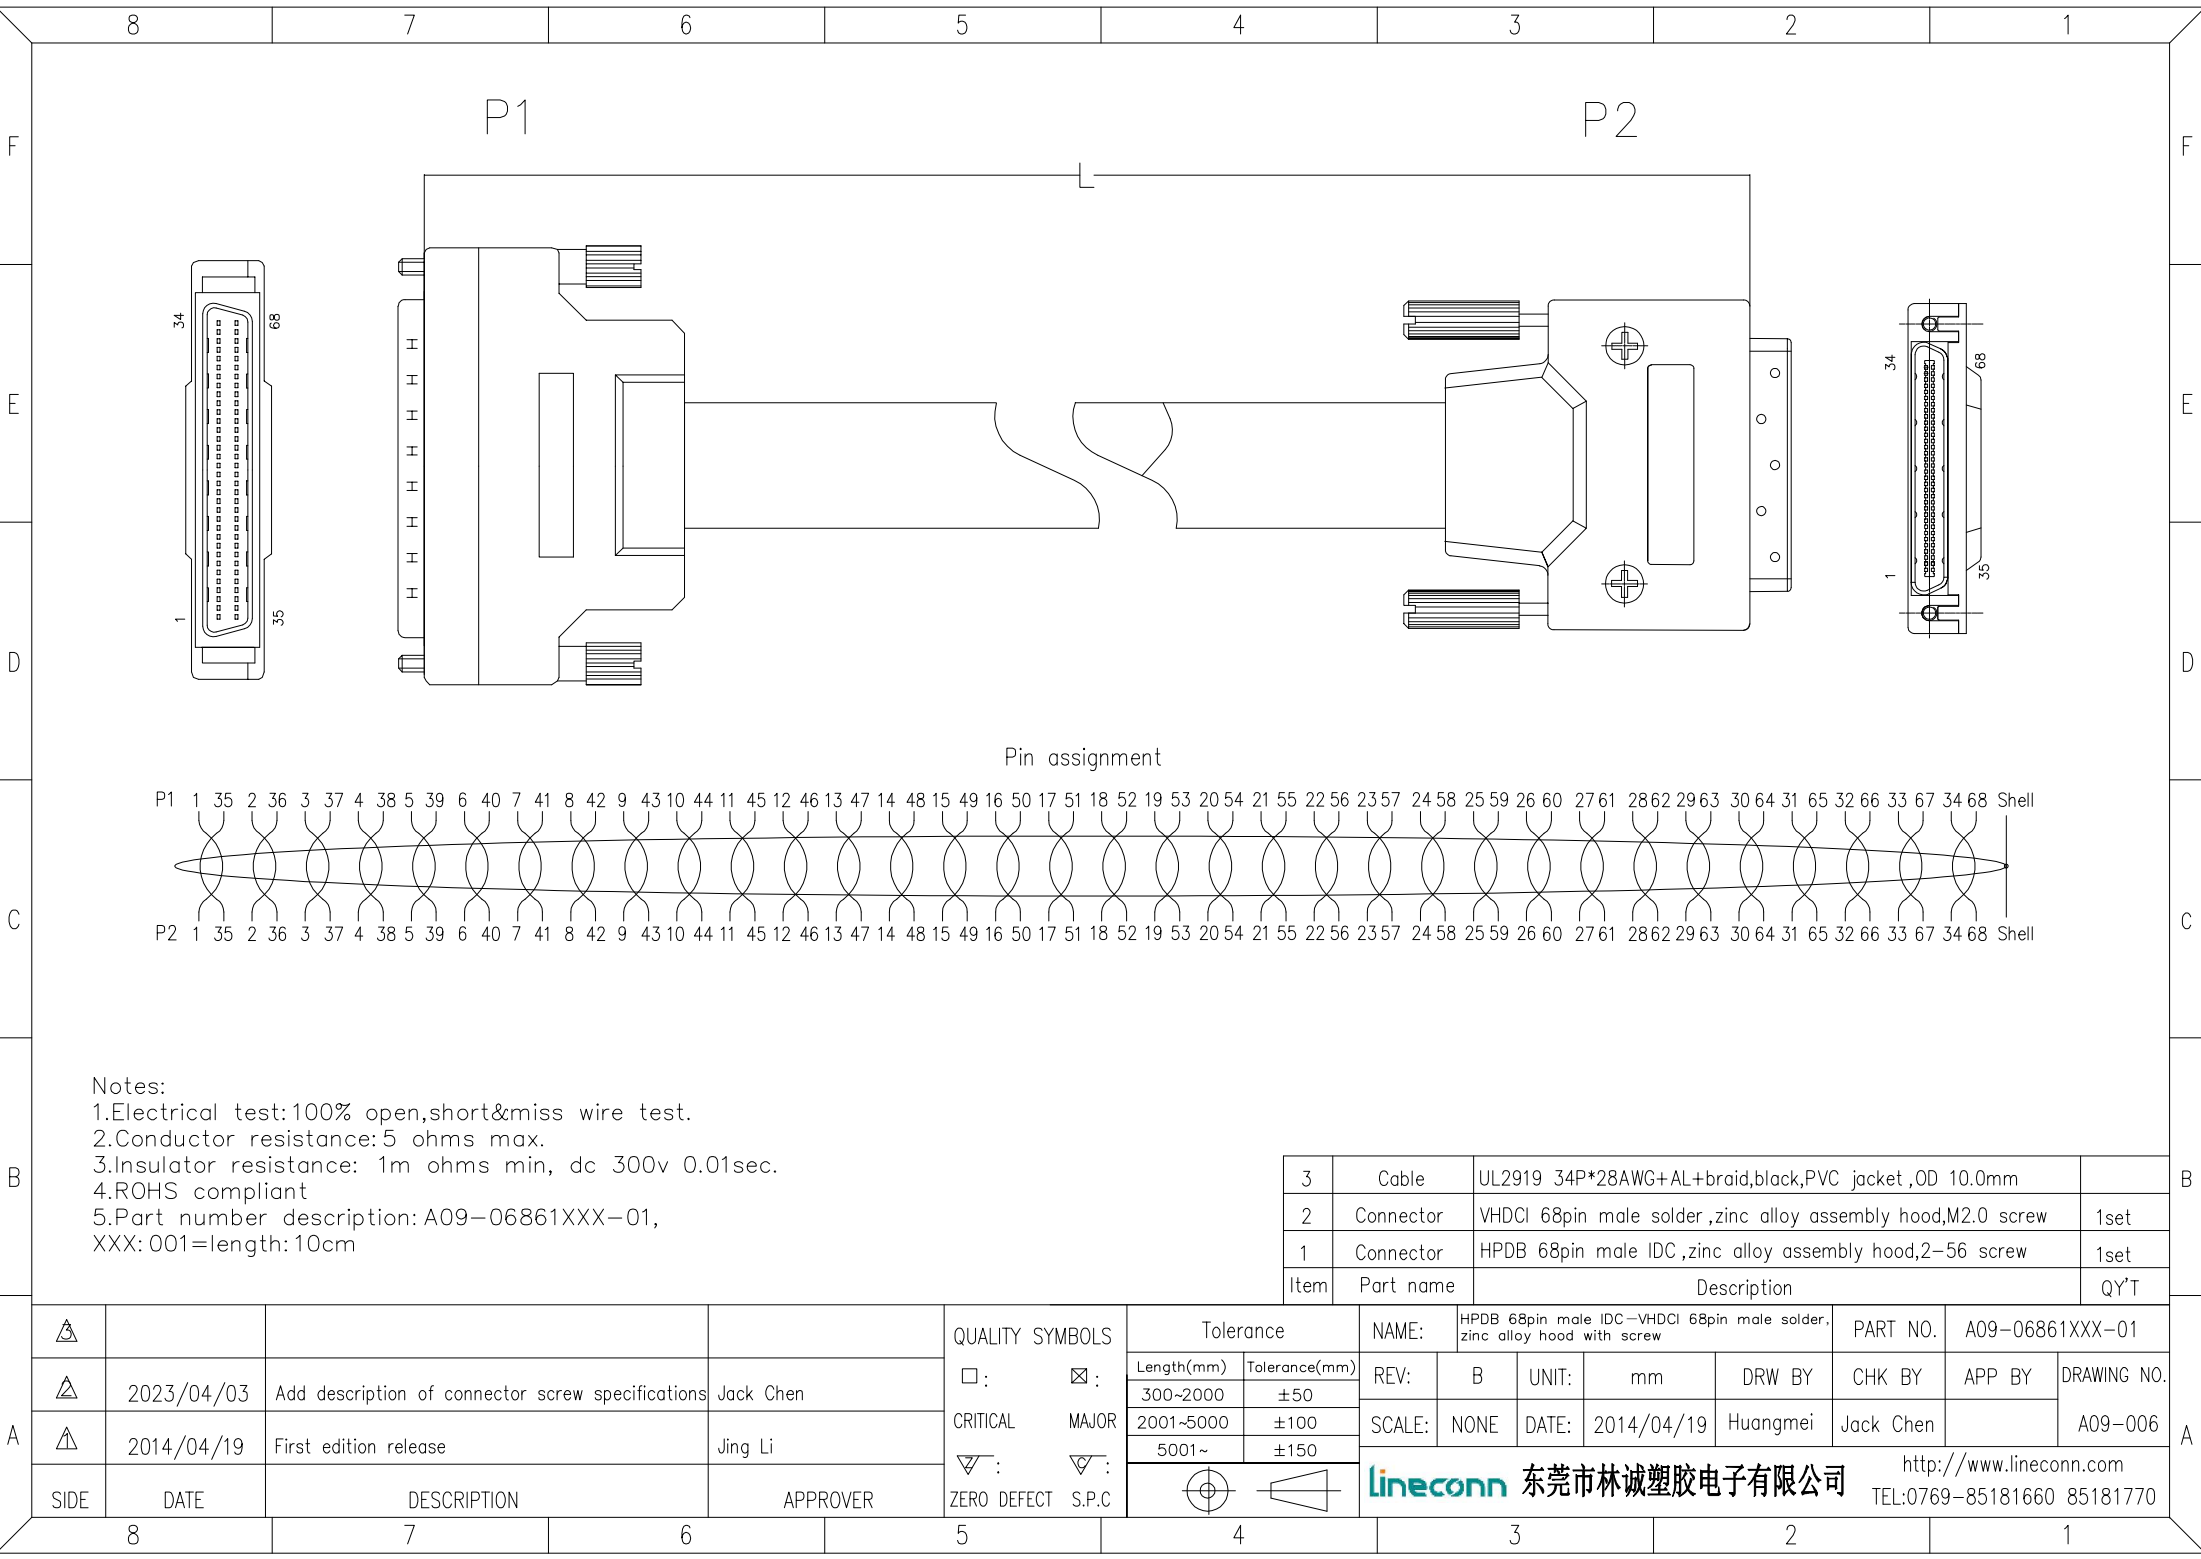

Notes:
1.Electrical test:100% open,short&miss wire test.
2.Conductor resistance:5 ohms max.
3.Insulator resistance: 1m ohms min, dc 300v 0.01sec.
4.ROHS compliant
5.Part number description: A09-06861XXX-01,
XXX:001=length:10cm

3	Cable	UL2919 34P*28AWG+AL+braid,black,PVC jacket ,OD 10.0mm	
2	Connector	VHDCI 68pin male solder ,zinc alloy assembly hood,M2.0 screw	1set
1	Connector	HPDB 68pin male IDC ,zinc alloy assembly hood,2-56 screw	1set
Item	Part name	Description	QY'T

A					QUALITY SYMBOLS	Tolerance		NAME: HPDB 68pin male IDC—VHDCI 68pin male solder, zinc alloy hood with screw		PART NO.		A09—06861XXX—01		A		
		2023/04/03	Add description of connector screw specifications	Jack Chen	☐ : ☒ :	Length(mm)	Tolerance(mm)	REV:	B	UNIT:	mm	DRW BY	CHK BY		APP BY	DRAWING NO.
		2014/04/19	First edition release	Jing Li	CRITICAL MAJOR	300~2000	±50	SCALE:	NONE	DATE:	2014/04/19	Huangmei	Jack Chen			A09—006
						2001~5000	±100									
	SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C			lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769—85181660 85181770								
8		7		6		5		4		3		2		1		