

F

F

E

E

D

D

C

C

B





B

A


A

P1

P2

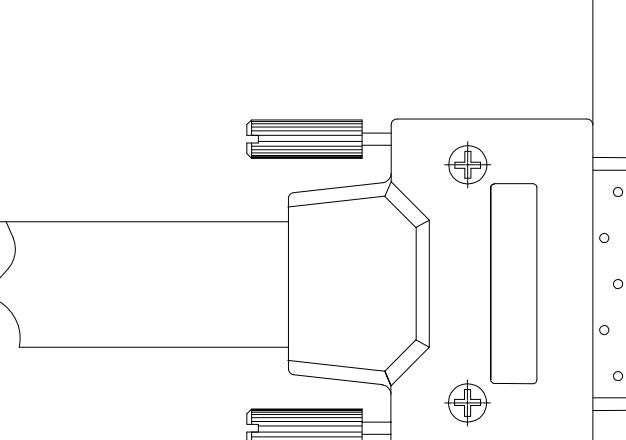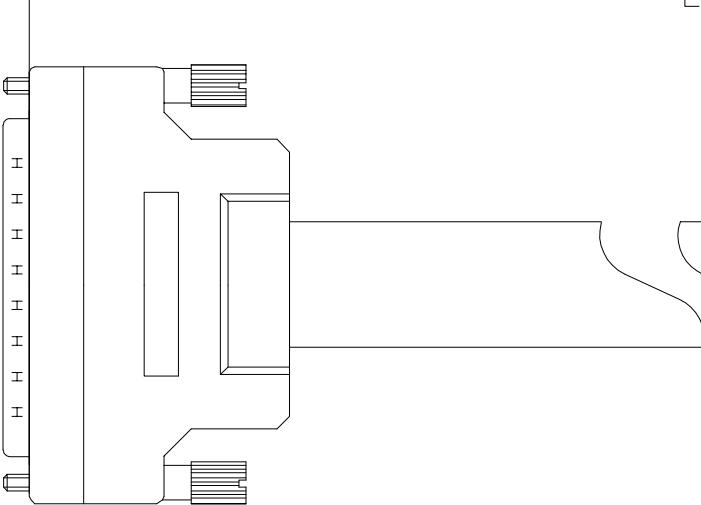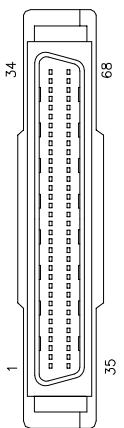

## Pin assignment

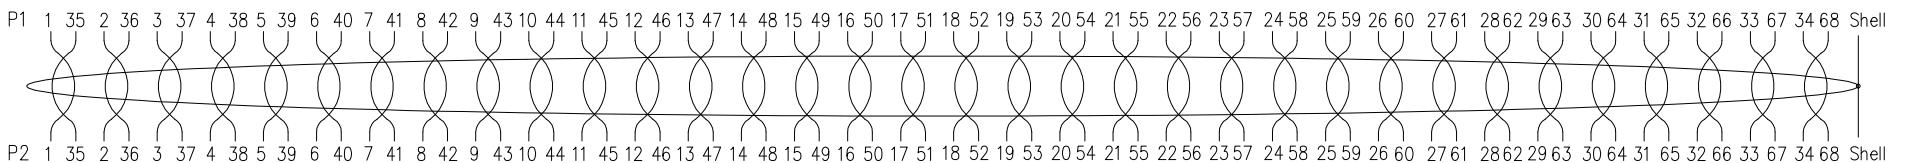

## Notes:

- 1.Electrical test:100% open,short&miss wire test.
- 2.Conductor resistance: 5 ohms max.
- 3.Insulator resistance: 1m ohms min, dc 300v 0.01sec.
- 4.ROHS compliant
- 5.Part number description: A09-06861XXX-T1,  
XXX: 001=length:10cm

3	Cable	UL20276 28AWG*34P+AL+braid,black flexible cable,OD 9.0mm	
2	Connector	VHDCI 68pin male solder,zinc alloy assembly hood,M2.0 screw	1set
1	Connector	HPDB 68pin male IDC ,zinc alloy assembly hood,2-56 screw	1set
Item	Part name	Description	
		QTY	

QUALITY SYMBOLS  
 :  :  
 CRITICAL      MAJOR  
 $\nabla$  :  $\nabla$  :  
 ZERO DEFECT    S.P.C.

## Tolerance

NAME:	HPDB 68pin male IDC -VHDCI 68pin male solder,zinc alloy hood with screw,flexible cable				PART NO.	A09-06861XXX-T1	
Length(mm)	Tolerance(mm)	REV:	B	UNIT:	mm	DRW BY	CHK BY
300~2000	$\pm 50$						APP BY
2001~5000	$\pm 100$	SCALE:	NONE	DATE:	2022/12/22	Huangmei	Jack Chen
5001~	$\pm 150$						

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com  
TEL:0769-85181660 85181770

SIDE	DATE	DESCRIPTION	APPROVER
------	------	-------------	----------