
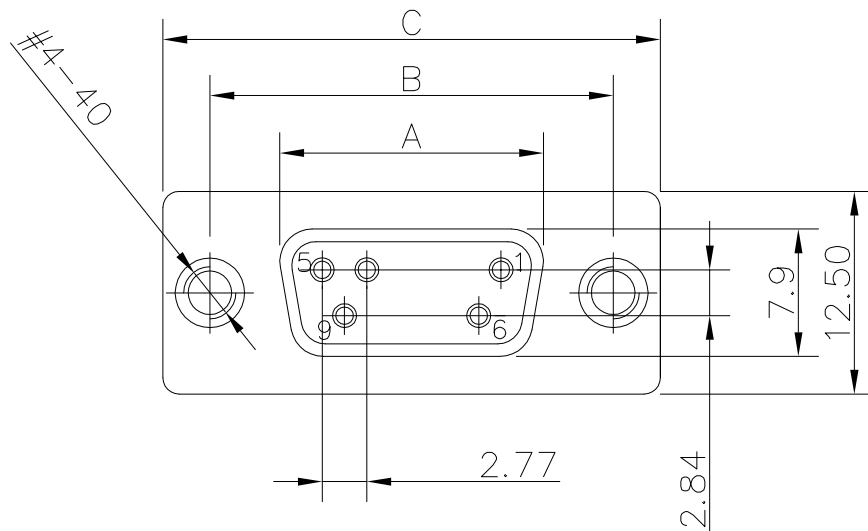
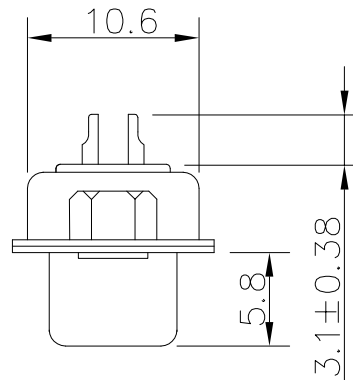


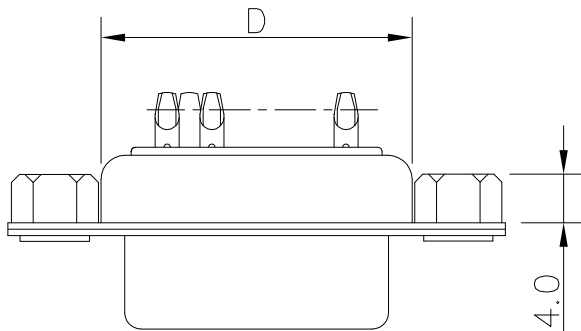

Pin no.	A	B	C±0.38	D
09	16.33	24.99	30.81	19.3
15	24.66	33.32	39.14	27.7
25	38.38	47.04	53.04	41.3
37	54.84	63.50	69.32	57.7

Current rating: 3A
Withstanding voltage: 1000V AC
Insulation resistance: 1000MΩ Min.
Temperature range: -55℃ to +125℃
ROHS compliant
Part No.:

B05-0XX4X1XN-S4

No.of contact:

09: 9pos

15: 15pos

25: 25pos

37: 37pos

Housing color:

1: Black

5: White

6: Blue

Contact area:

A: G/F

C: Au 3u"

k: Au 30u"

5	Nut	Steel	Plating:Ni
4	Rear shell	SPCC	Plating:Sn
3	Front shell	SPCC	Plating:Ni
2	Housing	PBT+30%GF	Color:see part no.
1	Terminal	Copper alloy	Contact area:see part no. Solder area:Sn
Item	Desc.	Material	Remaks

△

2022/07/22

Add Terminal plating

Jack Chen

QUALITY SYMBOLS

Tolerance

NAME:

D-SUB female solder,rivet 4.0
through hole nuts at the rear

PART NO.

B05-0XX4X1XN-S4

△

2022/04/19

Change tolerance note

Jack Chen

□: ☒:

x. ±0.60

REV:

D

UNIT:

mm

DRW BY

CHK BY

APP BY

DRAWING NO.

△

2009/04/14

First edition release

Jing Li

CRITICAL MAJOR

.x ±0.40

SCALE:

N:1

DATE:

2009/04/14

Huangmei

Jack Chen

B05-071


SIDE

DATE

DESCRIPTION

APPROVER

ZERO DEFECT S.P.C



Lineconn

东莞市林诚塑胶电子有限公司

http://www.lineconn.com

TEL:0769-85181660 85181770