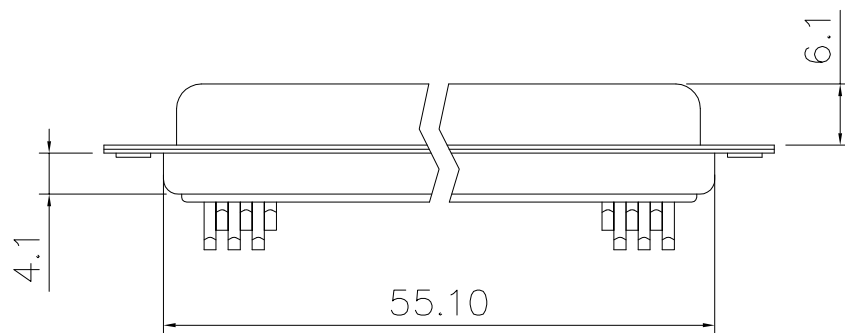
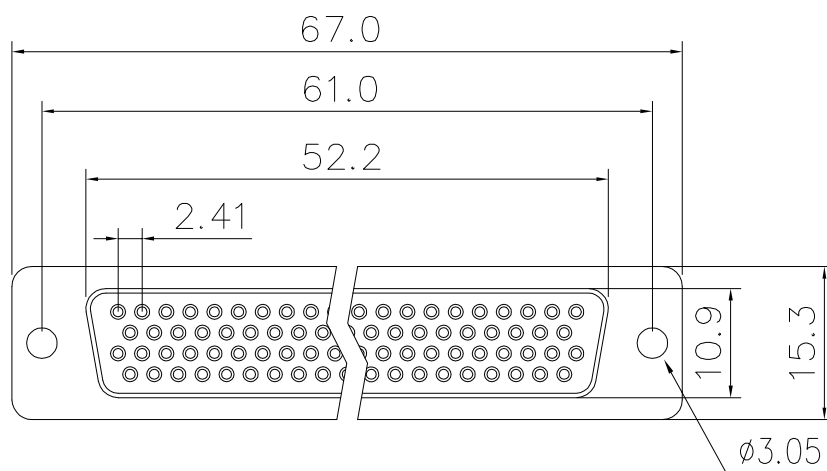


Voltage current rating: 3 AMP
 Dielectric withstanding voltage: 1000V AC
 Insulation resistance: 1000mΩ min.
 Temperature range: -55℃ to +125℃
 Durability: 500 cycles
 ROHS compliant

Part number:
 B04-0784X1AN-01

Housing:
 1: black
 5: white
 6: blue

4	Rear shell	SPCC	Palting: Sn
3	Front shell	SPCC	Palting: Ni
2	Housing	PBT+30%GF	Color: see part no.
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn
Item	Desc.	Material	Remark


△	2021/07/24	Add durability	Jack Chen
△	2021/05/07	Change part number	Jack Chen
△	2010/06/03	First edition release	Jing Li

QUALITY SYMBOLS

□: ☒:
 CRITICAL MAJOR
 ▽: ▽:
 ZERO DEFECT S.P.C

Tolerance

x. ±0.60
 .x ±0.40
 .xx ±0.25



NAME:	HD.D-SUB 78pin female solder				PART NO.	B04-0784X1AN-01		
REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2010/06/03	Huangmei	Jack Chen		B04-009	

lineconn 东莞市林诚塑胶电子有限公司

<http://www.lineconn.com>
 TEL: 0769-85181660 85181770

SIDE	DATE	DESCRIPTION	APPROVER
------	------	-------------	----------