

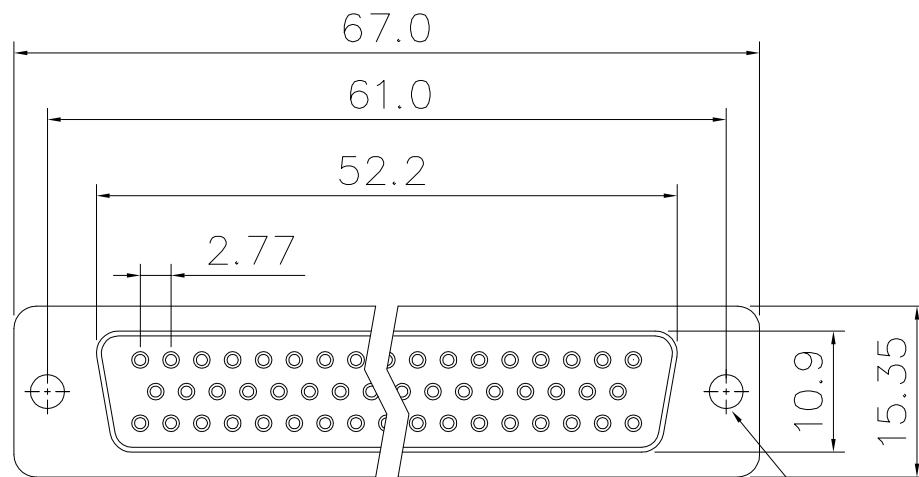




ø3.05 Clear hole

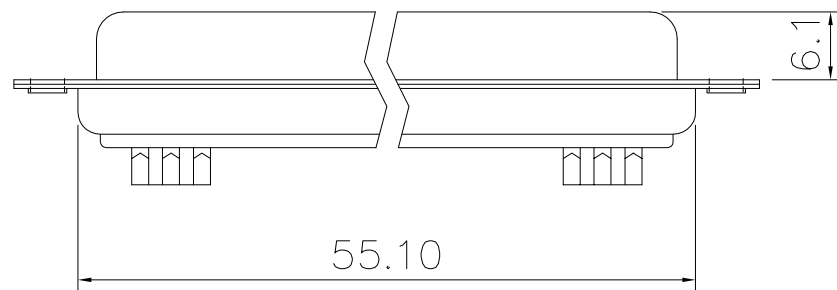

Current rating: 3 AMP.
Withstanding voltage: 1000V AC
Insulation resistance: 1000MΩ Min.
Temperature range: -55℃ to +125℃
ROHS compliant
Part No.:

B05-0504X1AN-01

Housing color: _____

1: Black

5: White

6: Blue

4	Rear shell	SPCC	Plating: Sn
3	Front shell	SPCC	Plating: Ni
2	Housing	PBT+30%GF	Color: see part no.
1	Terminal	Copper alloy	Plating: Sn, Au
Item	Desc.	Material	Remark

△	2021/04/09	Change part number	Jack Chen
△	2014/11/21	Add dimension comment	King Zhou
△	2010/06/03	First edition release	Jing Li
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance		NAME:		D-SUB 50pin female solder			PART NO.		B05-0504X1AN-01	
□:	☒:	x.	±0.60	REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B05-020	
CRITICAL	MAJOR	.x	±0.40	SCALE:	N:1	DATE:	2010/06/03	Qiang Liao	Jack Chen			
▽:	▽:	.xx	±0.25									
ZERO DEFECT	S.P.C											



东莞市林诚塑胶电子有限公司

<http://www.lineconn.com>
TEL:0769-85181660 85181770

lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
TEL: 0769-85181660 85181770