
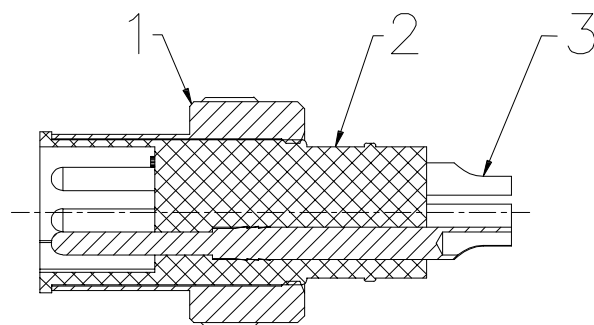
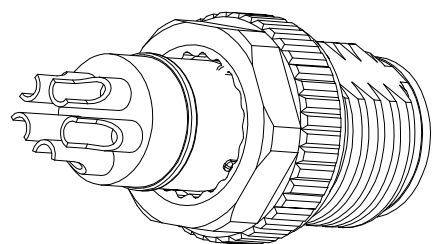


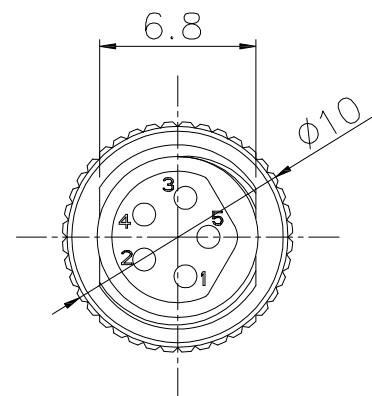

Section A-A

Technical parameters:

- 1.Current rating: 3A
- 2.Rated voltage: 30V
- 3.Contact resistance: 3mΩ Max.
- 4.Durability: 500 cycles
- 5.Temperature range: -40℃ to +85℃
- 6.ROHS compliant
- 7.Waterproof rating: IP67

3	Terminal	Copper alloy	Plating: Au
2	Housing	PPS	Color: black
1	Shell	Zinc alloy	Plating: Ni
Item	Desc.	Material	Remark

				QUALITY SYMBOLS	Tolerance		NAME:		M8 B coded 5pin male solder				PART NO.		B10-M08LT050-1A	
				□: ☒:	x. ±0.60		REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.		
				CRITICAL MAJOR	.x ±0.40		SCALE:	N:1	DATE:	2020/10/21	Huangmei	Jack Chen		B10-052		
				▽: ▽:	.xx ±0.25		lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770									
				ZERO DEFECT S.P.C	 											
SIDE	DATE	DESCRIPTION	APPROVER													
	2020/10/21	First edition release	Jack Chen													

Lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL:0769-85181660 85181770