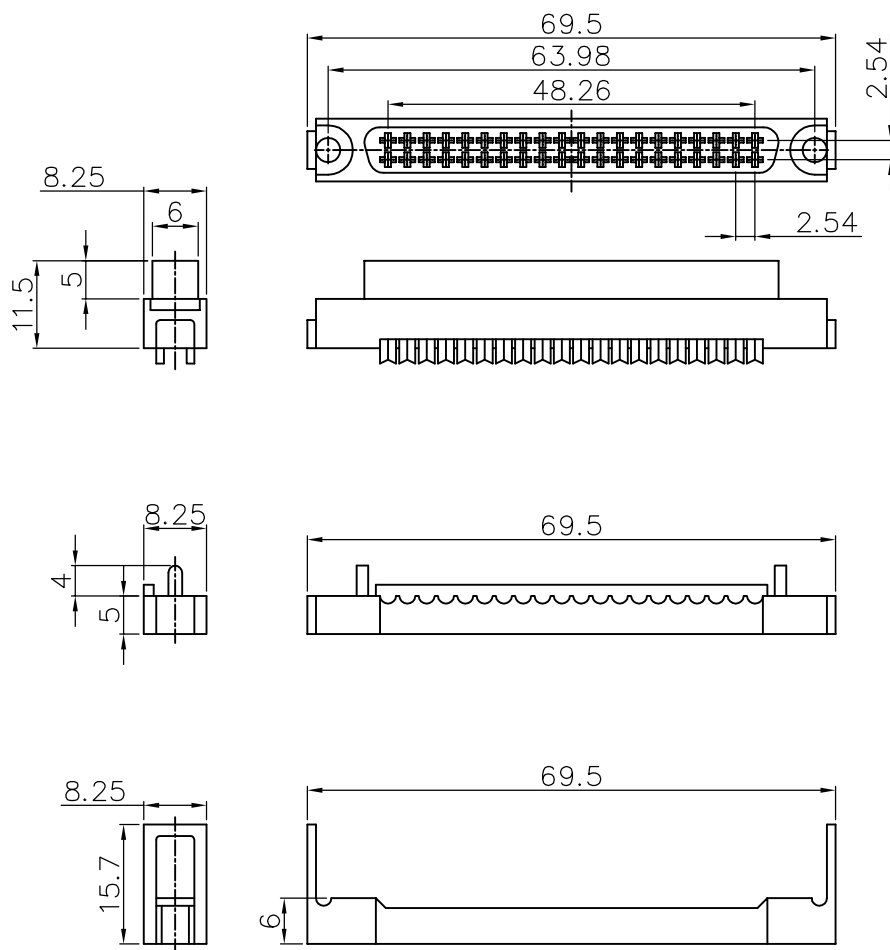


Current rating: 3 AMP.
Withstanding voltage: 500V AC
Insulation resistance: 500MΩ Min
Contact Resistance: 35mΩ/Max.
Temperature range: -45℃ to +105℃
ROHS compliant
Can replace Fujitsu FCN-367J040-AU/F

3	Screw	Steel	Plating: Ni
2	Housing	PBT+30%GF	Color: black
1	Terminal	Copper alloy	Contact area: G/F Solder area: Ni Under-plating: Ni
Item	Desc.	Material	Remark

△			
△			
△	2022/09/17	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□:	☒:	x.	±0.60
CRITICAL	MAJOR	.x	±0.40
▽:	▽:	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:		FCN 40pin female IDC for flat cable			PART NO.		B01-040210A0-02	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2022/09/17	Huangmei	Jack Chen		B01-070	
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com			
					TEL:0769-85181660 85181770			