



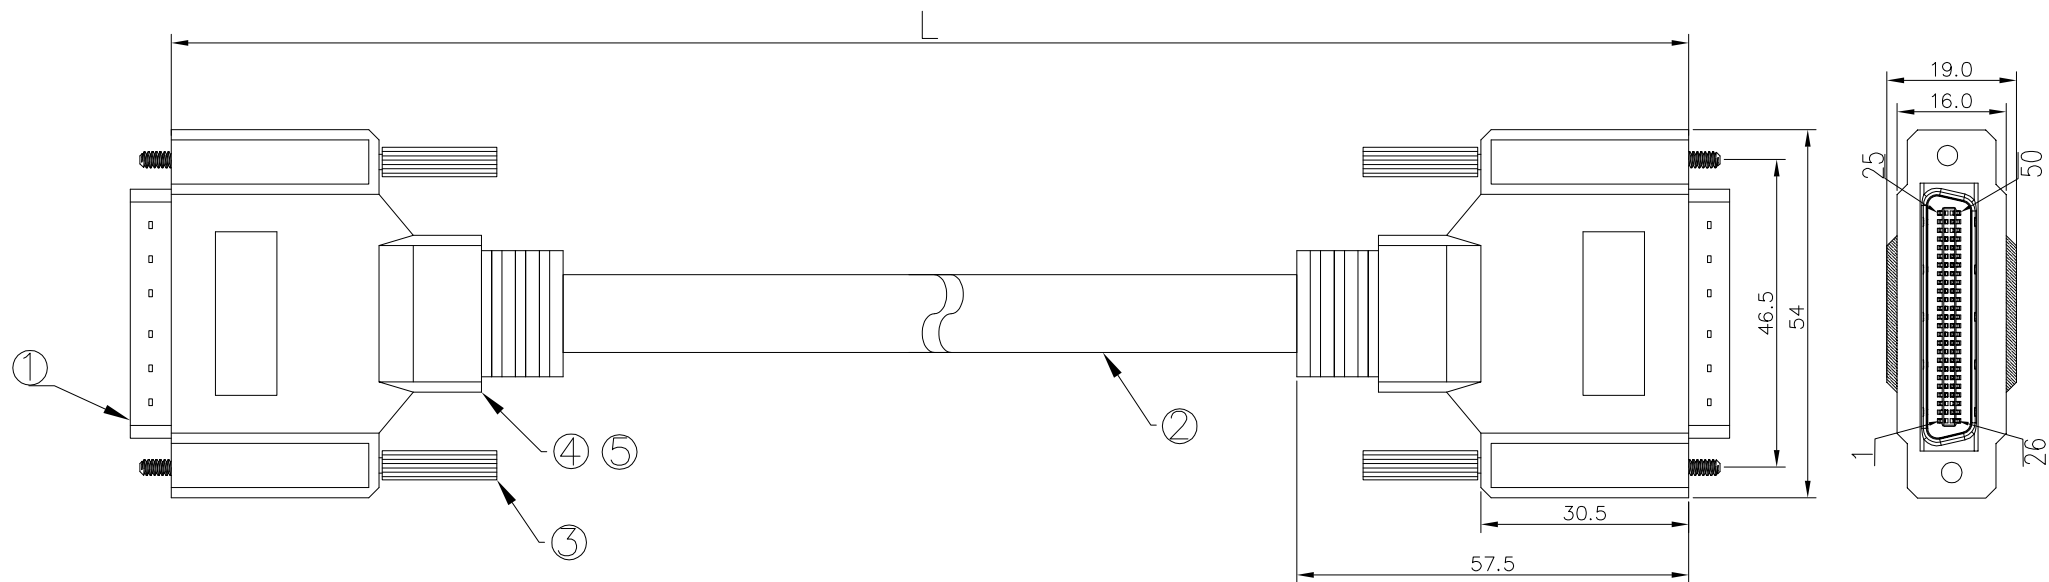

Pin assignment

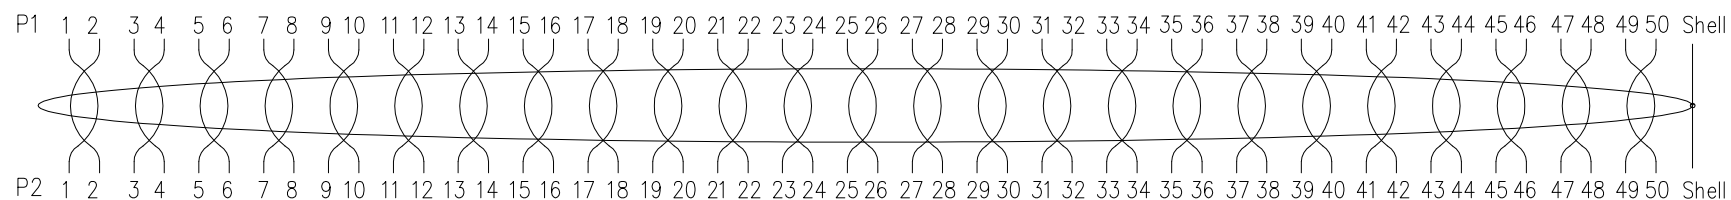

Notes:

- 1.Electrical test:100% open,short&miss wire test.
- 2.Conductor resistance:5 ohms max.
- 3.Insulator resistance: 1m ohms min, dc 300v 0.01sec.
- 4.ROHS compliant
- 5.Part no. description: A06-05011XXX-C3,
XXX: 001=length: 10cm

5	Inner mold	LDPE	NA
4	Over mold	45P PVC color: black	NA
3	Screw	Screw M2.6 Ni,ABS black+Steel	4pcs
2	Cable	UL20276 28AWG*25P+AL+braid PVC jacket color:black OD=8.5mm	1pcs
1	Connector	SCSI(HPCN) 50pin male IDC molded type	2pcs
Item	Part name	Description	QY'T

	2022/05/06	Add dimension annotations	Carl Hu	QUALITY SYMBOLS   CRITICAL MAJOR   ZERO DEFECT S.P.C	Tolerance		NAME: SCSI(HPCN) 50pin male to male cable, molded type,M2.6 screw		PART NO.		A06-05011XXX-C3			
	2022/04/19	Add dimension annotations	Carl Hu		Length(mm)	Tolerance(mm)	REV:	E	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
	2016/08/22	First edition release	Jack Chen		300-2000	±50	SCALE:	NONE	DATE:	2016/08/22	Yugong	Carl Hu		
					2001-5000	±100								
					5001~	±150								
SIDE	DATE	DESCRIPTION	APPROVER		 		 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770		