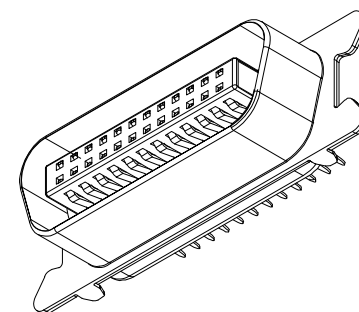

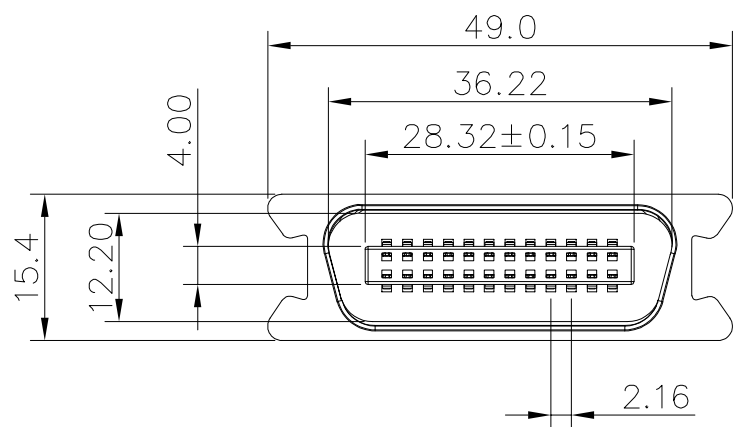


Current rating: 5A
 Withstanding voltage: 250V AC
 Contact resistance : 30mΩ max.
 Insulation resistance: 1000MΩ Min.
 Temperature range: -55℃ to +105℃
 ROHS compliant
 Part number:

B17-0247X1A0-M2

Housing color: _____
 1: Black
 6: Blue

3	Housing	PBT+G.F.30% (UL 94V-0)	Color: see part no.
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor copper	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2020/04/02	First edition release	Carl Hu
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

QUALITY SYMBOLS

□: ☒:
 CRITICAL MAJOR
 ∇: ∇:
 ZERO DEFECT S.P.C

Tolerance

x: ±0.60
 .x ±0.40
 .xx ±0.25

NAME:

Centronics(57) 24pin male vertical for PCB,MD type

PART NO.

B17-0247X1A0-M2

REV:

A

UNIT:

mm

DRW BY

CHK BY

APP BY

DRAWING NO.

SCALE:

N:1

DATE:

2020/04/02

Huangmei

Carl Hu

B17-032

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
 TEL:0769-85181660 85181770

