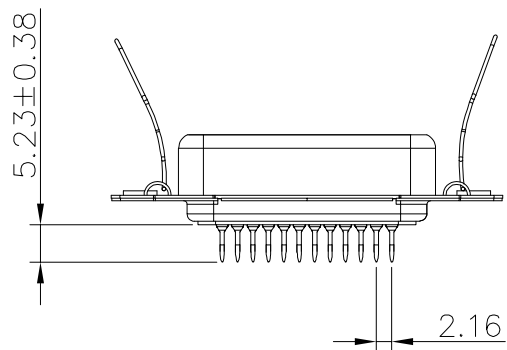
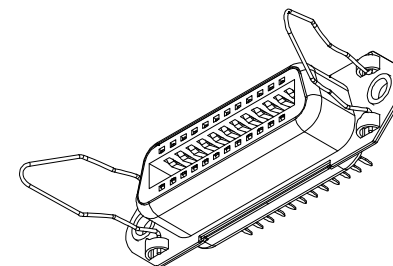

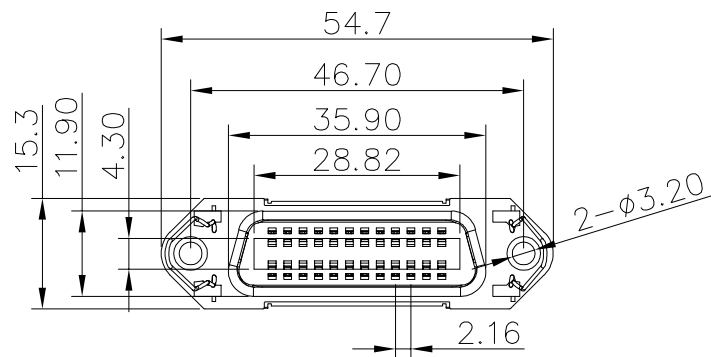


PCB layout

Current rating: 5A
 Withstanding voltage: 250V AC
 Contact resistance : 30mΩ max.
 Insulation resistance: 1000MΩ Min.
 ΔTemperature range: -55℃ to +105℃
 ROHS compliant
 ΔPart number:
 B17-0248X1AN-C5
 Housing color: _____
 1: Black
 6: Blue

4	Spring loaded buckle	Steel	Plating: Ni
3	Housing	PBT+G.F.30% (UL 94V-0)	Color: see part no.
2	Sheel	SPCC	Plating: Ni
1	Terminal	Phosphor copper	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

Δ	2021/07/12	Change part number	Jack Chen
Δ	2019/11/04	Change temperature range	King Zhou
Δ	2016/10/12	First edition release	King Zhou
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS
 □: ☒: CRITICAL MAJOR
 ▽: ▽: ZERO DEFECT S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25

NAME:		Centronics(57) 24pin female vertical for PCB,with spring loaded buckle			PART NO.		B17-0248X1AN-C5	
REV:	E	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2016/10/12	Huangmei	Jack Chen		B17-026	
 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770			