

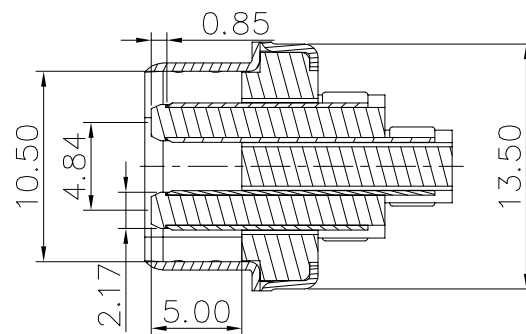


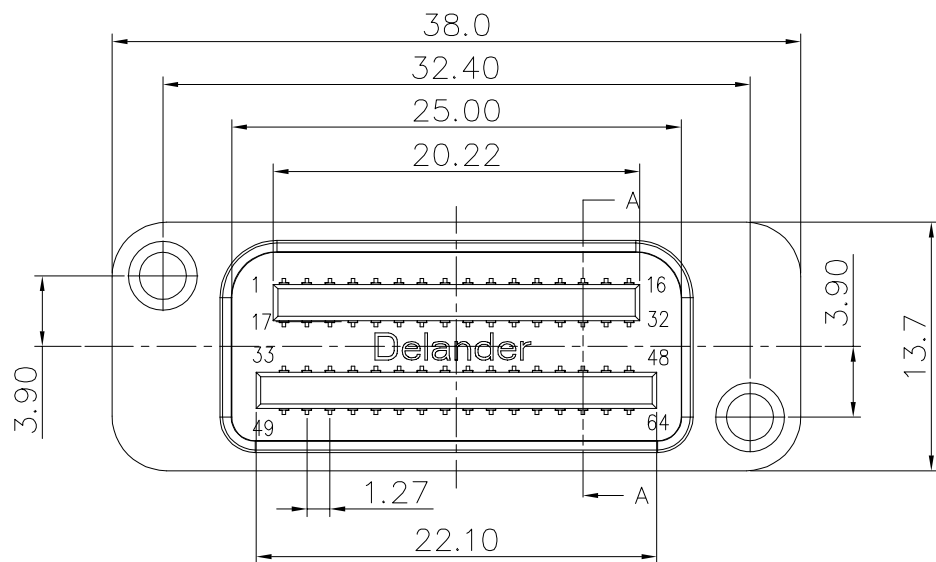

Section A-A

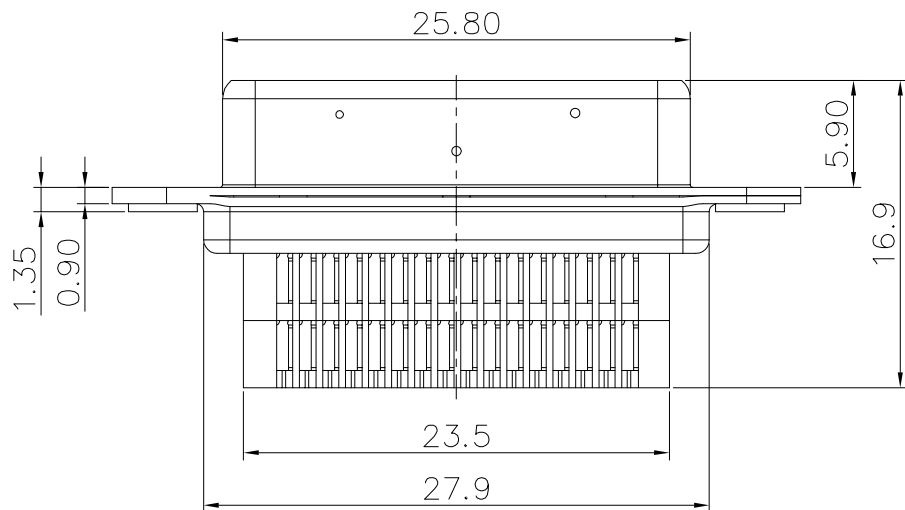

Current rating: 0.5A
Withstanding voltage:
1000 Vr.m.s, 1mA, 60s(Pin to Pin)
Contact resistance: 30mΩ max.
Insulation resistance: 500MΩ Min.
Temperature range: -45℃ to +105℃
ROHS compliant





5	Long contact	C5191R-H	Plating: G/F
4	Short contact	C5191R-H	Plating: G/F
3	Front shell	SPCC	Plating: Ni
2	Back shell	SPCC	Plating: Sn
1	Housing	LCP	Color: black
Item	Desc.	Material	Remark

△	2021/06/04	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

QUALITY SYMBOLS
□: □: CRITICAL MAJOR
▽: ▽: ZERO DEFECT S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25

NAME:		Delander 64pin male solder				PART NO.		B03-064311A0-01	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.		
SCALE:	N:1	DATE:	2021/06/04	Huangmei	Jack Chen		B03-129		
					东莞市林诚塑胶电子有限公司				
					http://www.lineconn.com				
					TEL:0769-85181660 85181770				

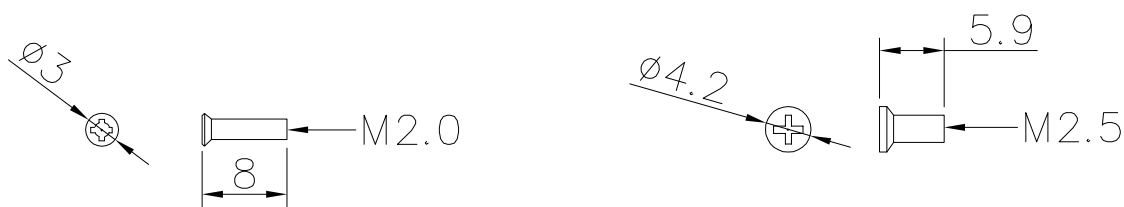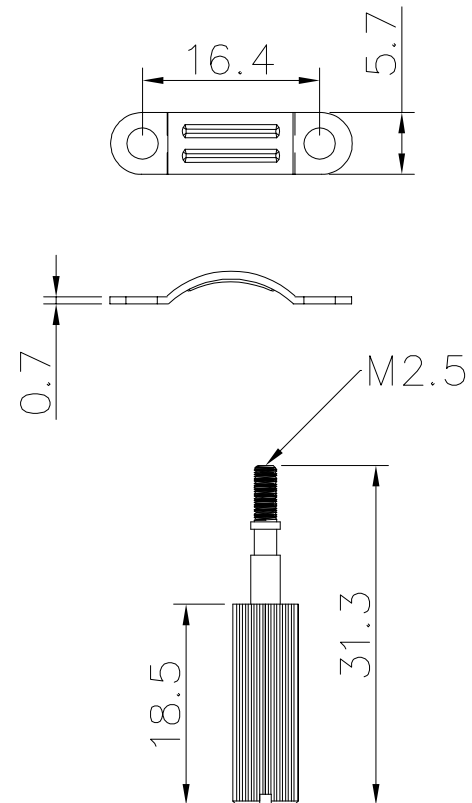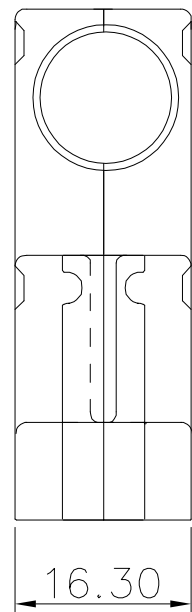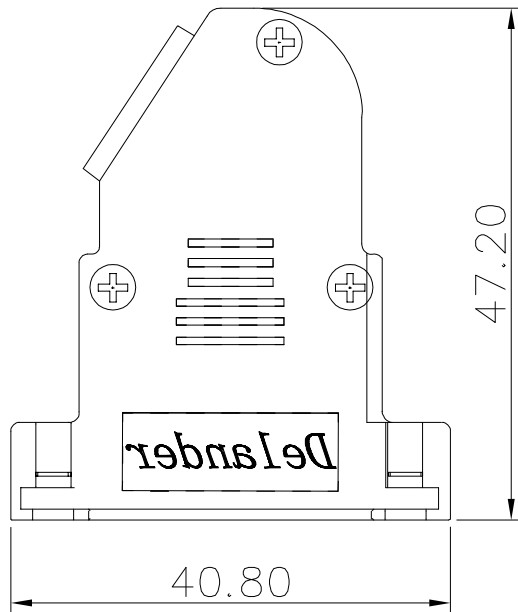

5	Clip	Steel	Plating: Ni
4	Screw M2.5	Steel	Plating: Ni
3	Screw M2.0	Steel	Plating: Ni
2	31.3mm screw M2.5	Steel	Plating: Ni
1	Hood	Zinc alloy	Plating: Ni
Item	Desc.	Material	Remark

				QUALITY SYMBOLS	Tolerance		NAME:		Delander 64pin male zinc alloy hood			PART NO.		B03-06400807-01	
				□: CRITICAL	☒: MAJOR	x. ±0.80	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
						.x ±0.50	SCALE:	N:1	DATE:	2021/06/04	Huangmei	Jack Chen		B03-129	
				▽: ZERO DEFECT	▽: S.P.C	.xx ±0.25	lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770								
A	△	2021/06/04	First edition release	Jack Chen											A
	SIDE	DATE	DESCRIPTION	APPROVER											
	8	7	6	5	4	3	2	1							