
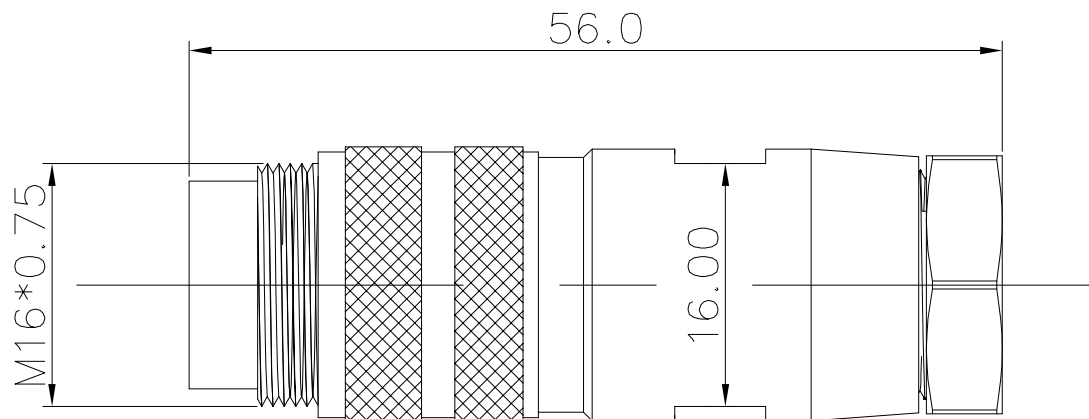




Current rating: 4A
Rated voltage: 250V
Contact resistance: 3mΩ Max.
Durability: 500 cycles
Temperature range: -25℃ to +85℃
ROHS compliant
Waterproof rating: IP67

13	Screw	Steel	Plating: Ni
12	Sealing ring	Silicone rubber	
11	Retaining ring	SUS304	
10	Cover	Hpb59-1	Plating: Ni
9	Rear shell	Hpb59-1	Plating: ternary alloy
8	Spacer	SUS304	
7	Nut	PA66	Color: black
6	Housing	PA66	Color: black
5	Terminal	Hpb59-1	Plating: Au
4	Sealing ring	Rubber	
3	Clip	3#zinc alloy	Plating: Ni
2	Shell	3#zinc alloy	Plating: Ni
1	Hood	Hpb59-1	Plating: ternary alloy
Item	Desc.	Material	Remark

△	2020/04/09	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□:	☒:	x.	±0.60
CRITICAL	MAJOR	.x	±0.40
▽:	▽:	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:		M16 8pin male solder assembly type			PART NO.		B10-M16A083A-01	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2020/04/09	Huangmei	Jack Chen		B10-153	
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770			