

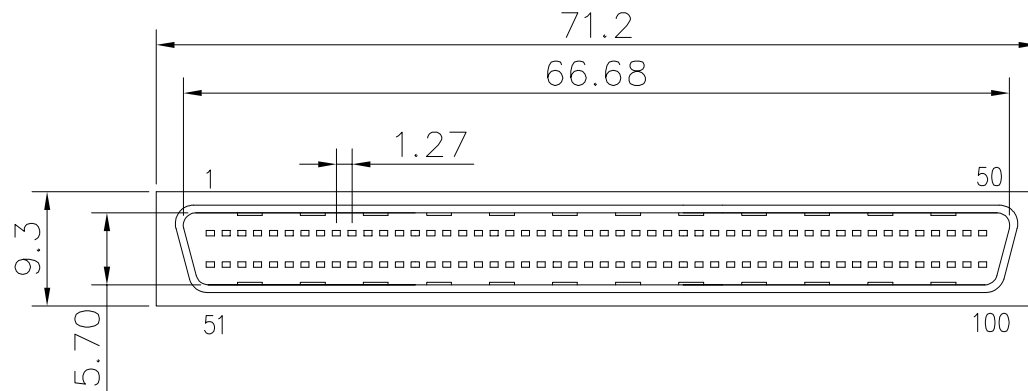




Current rating: 1 Amp
Insulation resistance: 500MΩ/Min
Withstanding voltage: 500V AC/Min
Contact resistance: 35mΩ Max
Temperature range: -45℃ to +105℃
ROHS compliant

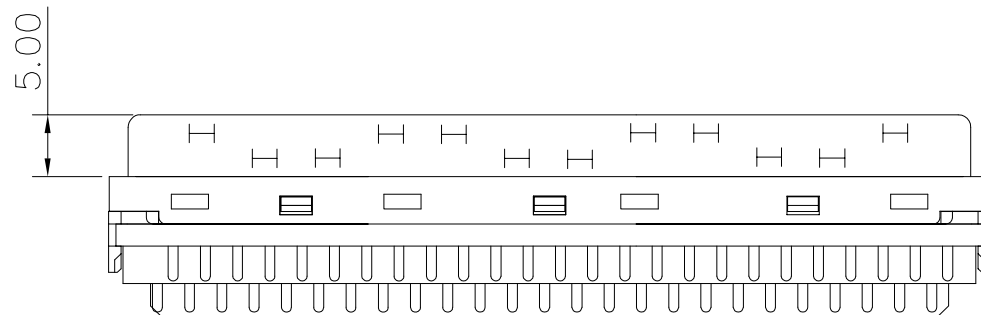

4	Cover	PBT+G.F.30%(UL 94V-0)	Color:black
3	Housing	PBT+G.F.30%(UL 94V-0)	Color:black
2	Shell	SPCC	Plating:Ni
1	Terminal	Copper alloy	Contact area:Au 5u” Solder area:Sn Under-plating:Ni
Item	Desc.	Material	Remark

△	2021/05/28	Change part number	Carl Hu
△	2015/07/22	Change Tolerance	King Zhou
△	2012/10/09	First edition release	King Zhou

QUALITY SYMBOLS	
□:	☒:
CRITICAL	MAJOR
▽:	▽:
ZERO DEFECT	S.P.C

Tolerance	
.x	±0.60
.x	±0.40
.xx	±0.25
 	

NAME:	SCSI II(HPDB) 100pin male solder, assembly connector				PART NO.	B02-100311E0-03		
REV:	E	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2012/10/09	Yugong	Carl Hu		B02-070	

Lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
TEL:0769-85181660 85181770

SIDE	DATE	DESCRIPTION	APPROVER
------	------	-------------	----------