


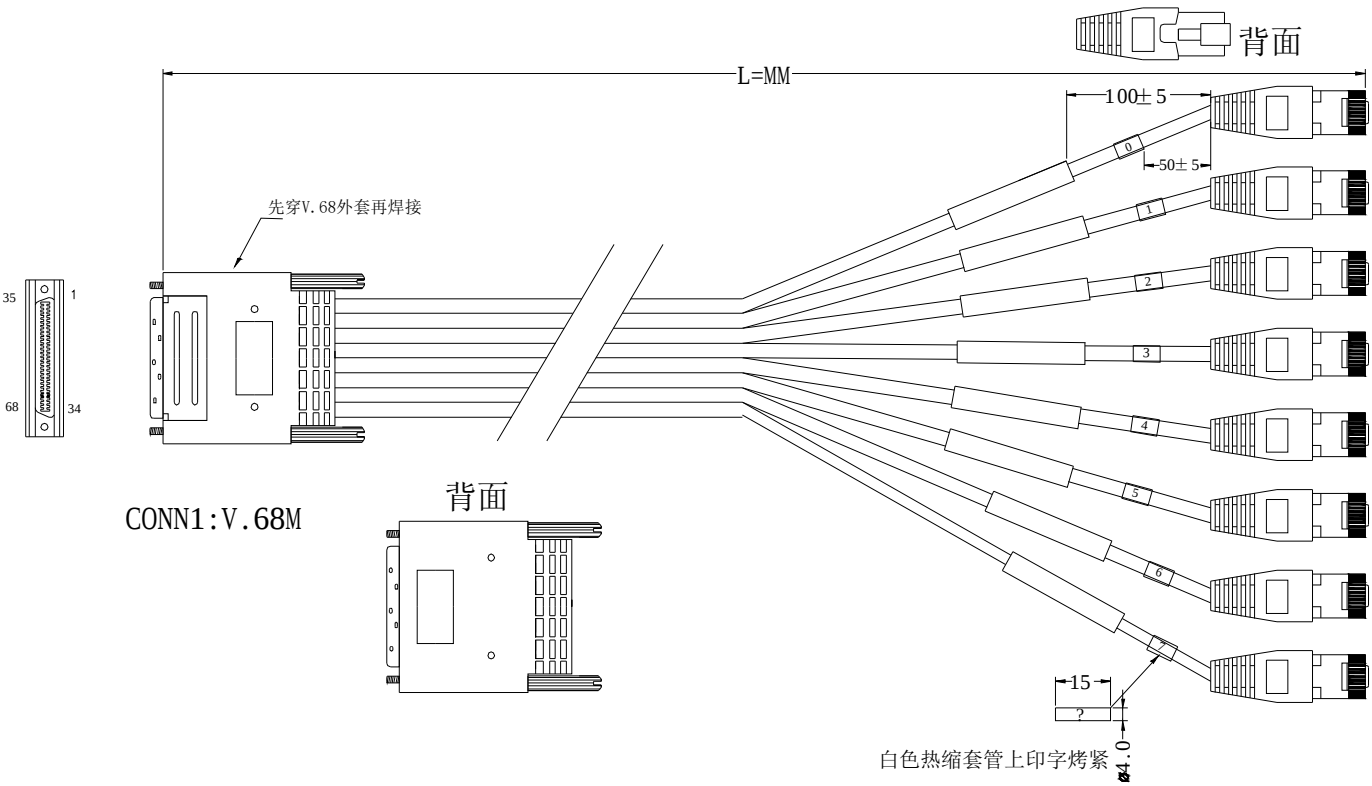



电气测试条件:
A. 电压: DC 300V
B. 绝缘阻抗: 10MΩ
C. 导通阻抗: 2Ω

6	OVERMOLD	PVC, 绿色	
5	MOLD	PE	
4	SCREW	光杆螺丝5*58 (M2牙)	2PCS
3	CONNECTOR	RJ45 8P8C 针镀金 透明带屏蔽	8SET
2	CONNECTOR	VHDCI 68PIN 公头, 端子镀G/F, 黑胶芯, 铁壳镀镍	1SET
1	CABLE	网络线8C*30AWG φ 3.8绿色 (橙/红、绿/黄、蓝/紫、棕/白)+D7/0.1TC+AL ROHS L=MM	8PCS
ITEM	PART NAME	DESCRIPTION	QY'T

				QUALITY SYMBOLS	Tolerance standard Length(cm)Tolerance
				□: ☒:	1~50 ±2
	2022/02/11	图面发行	JackChen	CRITICAL MAJOR	51~100 ±5
				▽: ▽:	101~500 ±10
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C	501~1500 ±30
8	7	6	5	4	

NAME:		CAB-HD8-ASYNC VHDCI 68P MALE-RJ45 8P8C*8 CABLE			PART NO.	A09-06863XXX-V3	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2022/02/11	Huangmei	JackChen		A09-020
 林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770							

1. 接线图: (V.68短路点34+68 65+67)

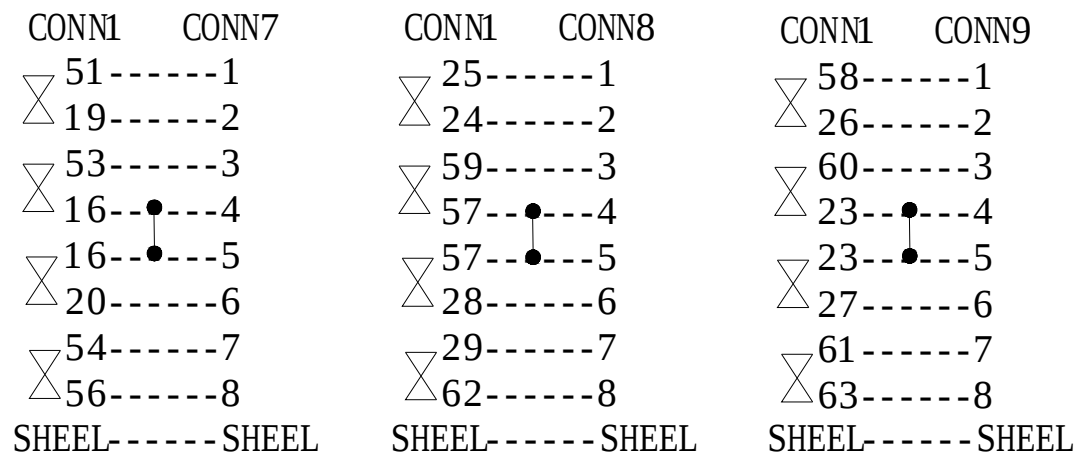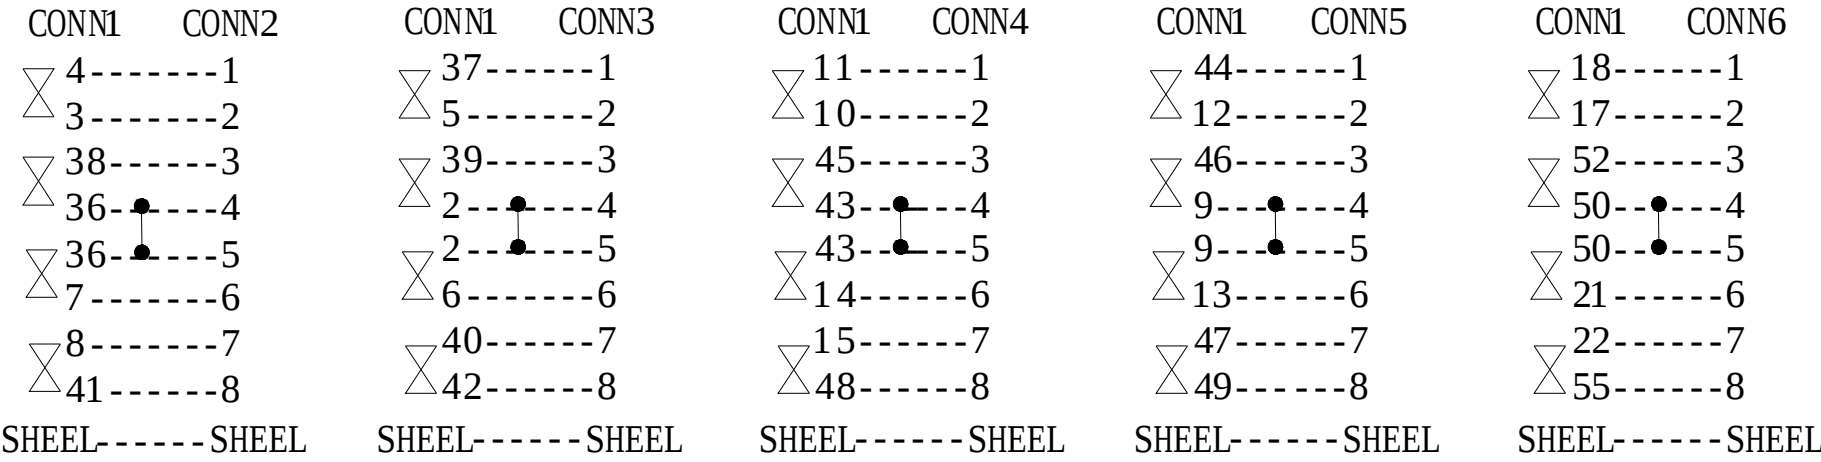

A					QUALITY SYMBOLS	Tolerance	NAME:	CAB-HD8-ASYNC VHDCI 68P MALE-RJ45 8P8C*8 CABLE				PART NO.	A09-06863XXX-V3		A	
					□: ☒:	x. ±0.80	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.		
		2022/02/11	新版发行		JackChen	CRITICAL MAJOR	.x ±0.50	SCALE:	N:1	DATE:	2022/02/11	Huangmei	JackChen			A09-020
						▽: ▽:	.xx ±0.30	Lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770								
	SIDE	DATE	DESCRIPTION		APPROVER	ZERO DEFECT S.P.C										
	8		7	6	5	4	3	2		1						