

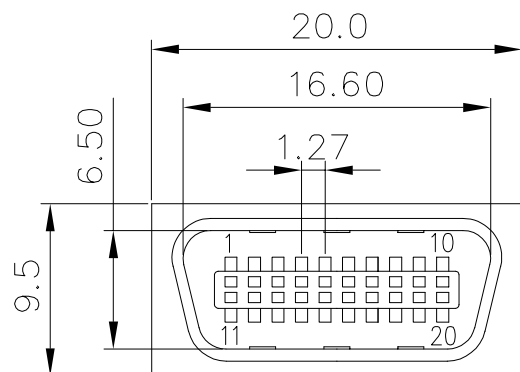




Current rating: 1 AMP.  
Withstanding voltage: 500V AC  
Insulation resistance: 500M $\Omega$  Min.  
Contact resistance: 35m $\Omega$  max.  
Temperature range: -45 $^{\circ}$ C to +105 $^{\circ}$ C  
ROHS compliant

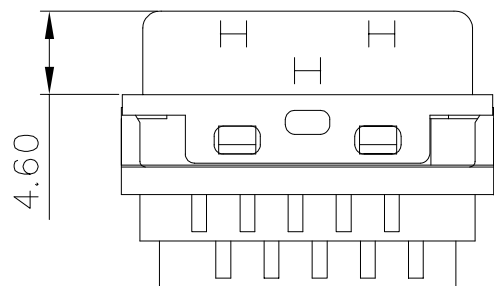

|      |          |                        |                                                              |
|------|----------|------------------------|--------------------------------------------------------------|
| 4    | Cover    | PBT+G.F.30% (UL 94V-0) | Color: black                                                 |
| 3    | Housing  | PBT+G.F.30% (UL 94V-0) | Color: black                                                 |
| 2    | Shell    | SPCC                   | Plating: Ni                                                  |
| 1    | Terminal | Phosphor bronze        | Contact area: Au 5u"<br>Solder area: Sn<br>Under-plating: Ni |
| Item | Desc.    | Material               | Remark                                                       |


|  |            |                       |           |
|--|------------|-----------------------|-----------|
|  | 2021/05/30 | Change part number    | Jack Chen |
|  | 2012/04/02 | Change tolerance      | King Zhou |
|  | 2008/08/12 | First edition release | King Zhou |

QUALITY SYMBOLS

: :  
CRITICAL MAJOR  
 : :  
ZERO DEFECT S.P.C

Tolerance

x.  $\pm 0.60$   
.x  $\pm 0.40$   
.xx  $\pm 0.25$



NAME:

SCSI(HPCN) 20pin male solder assembly connector

PART NO.

B03-020311E0-01

REV:

E

UNIT:

mm

DRW BY

CHK BY

APP BY

DRAWING NO.

SCALE:

N:1

DATE:

2008/08/12

Huangmei

Jack Chen

**lineconn** 东莞市林诚塑胶电子有限公司

<http://www.lineconn.com>  
TEL:0769-85181660 85181770

|      |      |             |          |
|------|------|-------------|----------|
| SIDE | DATE | DESCRIPTION | APPROVER |
|------|------|-------------|----------|