
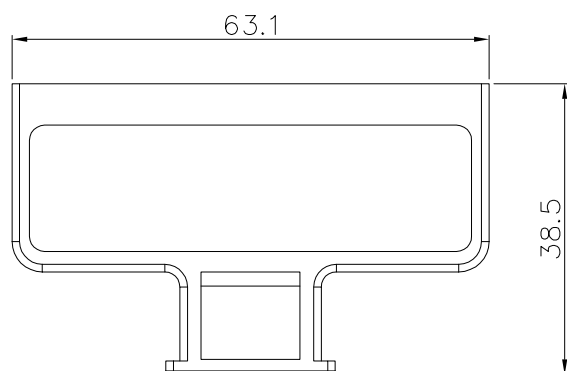
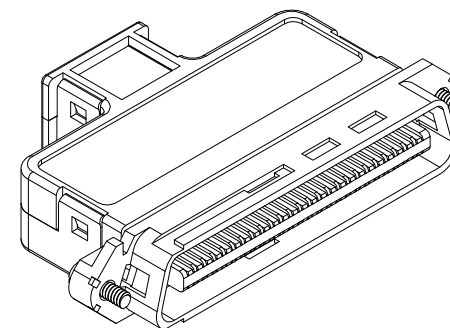

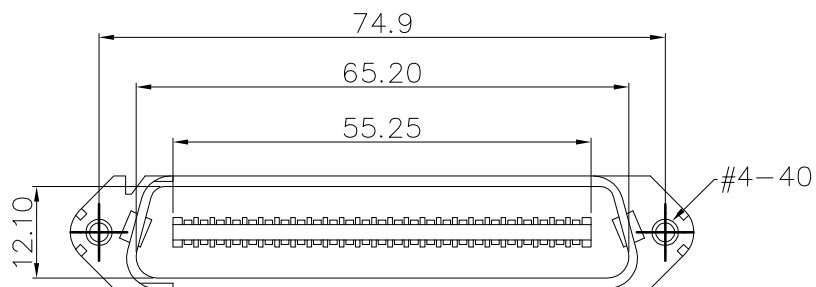




Current rating: 5A
Withstanding voltage: 250V AC
Contact resistance : 30mΩ max.
Insulation resistance: 1000MΩ Min.
Temperature range: -55℃ to +105℃
ROHS compliant

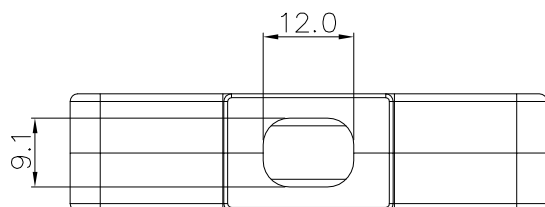

5	Screw	Steel	Plating: Ni
4	Hood	Thermo plastic	Color: black
3	Housing	PBT+G.F.30%	Color: black
2	Sheel	SPCC	Plating: Ni
1	Terminal	Copper alloy	Contact area: G/F Solder area: Ni Under-plating: Ni
Item	Desc.	Material	Remark

△			
△			
△	2020/01/12	First edition release	Carl Hu
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□:	☒:	x. ±0.80	
CRITICAL	MAJOR	.x ±0.50	
▽:	▽:	.xx ±0.25	
ZERO DEFECT	S.P.C		

NAME:		Centronics(57) 50pin male IDC, plastic hood assembly type			PART NO.	B17-050110A6-A1	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2020/01/12	Yugong	Carl Hu		B17-027
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770		