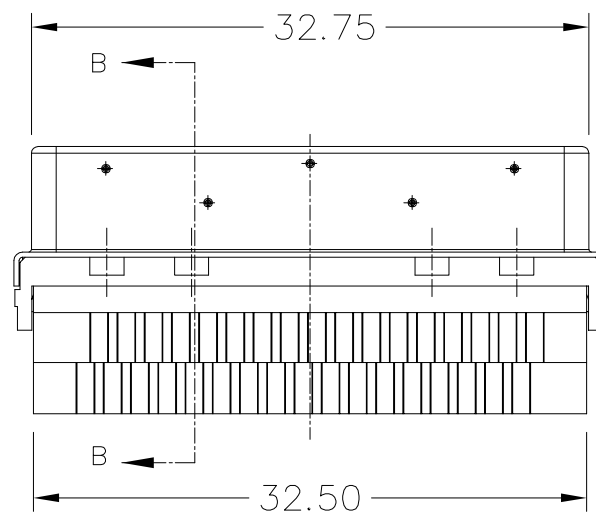
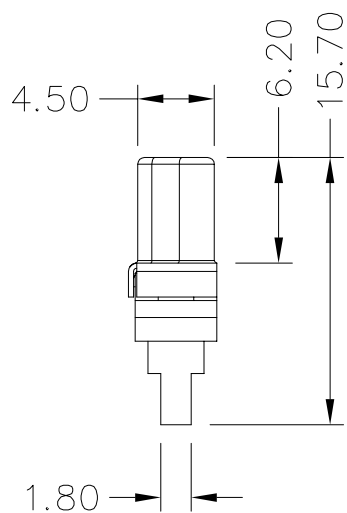
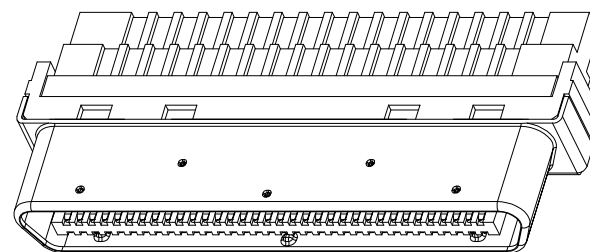
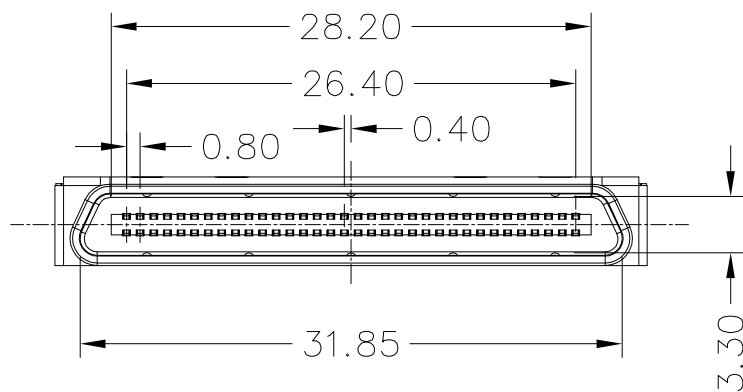


B-B

Voltage current rating: 2 AMP.
Dielectric withstanding voltage: 500V
Insulation resistance: 500M Ω Min.
Temperature range: -45°C to +125°C

4	Shell	SPCC T=0.30mm	Plated: Ni
3	Housing	PBT+30% UL 94-V0	Color: black
2	Cover	LCP+15% UL 94-V0	Color: black
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remarks





	2021/08/27	Changed temperature range, changed part number	Shuo Cao
	2017/01/12	First edition release	King Zhou
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS
☐ : ☒ :
 CRITICAL MAJOR
☒ : ☒ :
 ZERO DEFECT S.P.C


Tolerance
x. ± 0.60
.x ± 0.40
.xx ± 0.25

NAME:	VHDCI pitch 0.8mm 68pin male solder				PART NO.	B06-068311A0-01		
REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2017/01/12	Huangmei	Shuo Cao		B06-002	

lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
 TEL: 0769-85181660 85181770

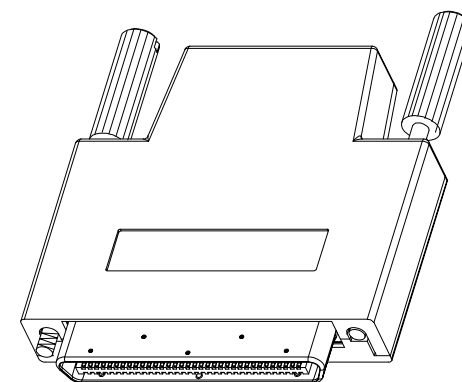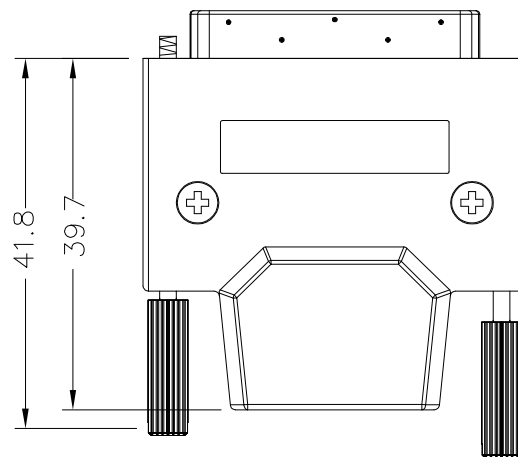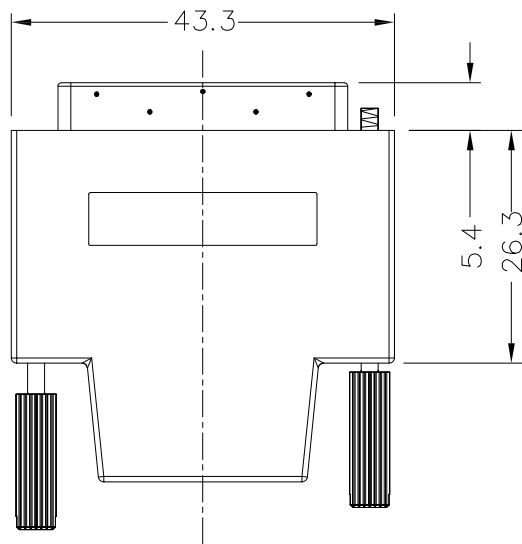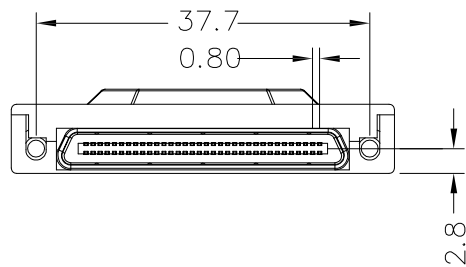

Current rating: 2 AMP.
Withstanding voltage: 500V
Insulation resistance: 500MΩ Min.
Temperature range: -45℃ to +125℃
Note: this part no.without connector

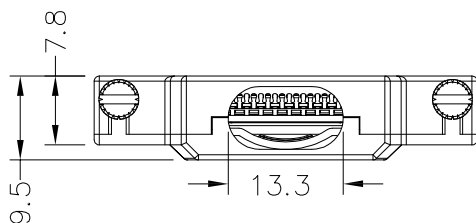

3	Nut	Steel	Plated: Ni
2	Screw	Steel	Plated: Ni
1	Hood	Zinc alloy	Plated: Ni
Item	Desc.	Material	Remaks

△			
△	2021/03/10	Change of part no.	Jack Chen
△	2017/01/16	First edition release	King Zhou
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□:	☒:	x.	±0.80
CRITICAL	MAJOR	.x	±0.50
▽:	▽:	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:	VHDCI pitch 0.8mm male zinc alloy hood for solder connector			PART NO.	B06-0683N1NA-01		
REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2017/01/16	Huangmei	Jack Chen		B06-003
lineconn 东莞市林诚塑胶电子有限公司				http://www.lineconn.com TEL: 0769-85181660 85181770			