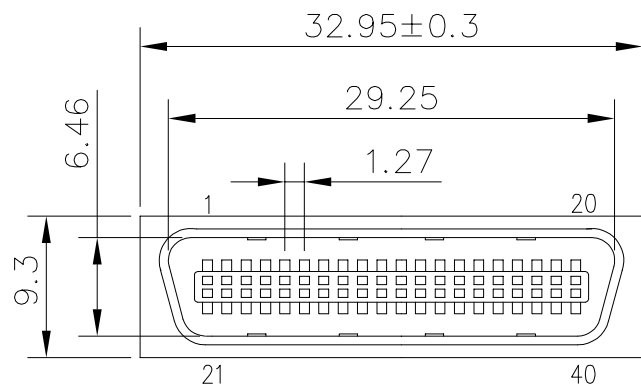


Current rating: 1 AMP.
Withstanding voltage: 500V AC
Insulation resistance: 500MΩ Min.
Contact resistance: 35mΩ max.
Temperature range: -45℃ to +125℃
ROHS compliant

4	Cover	PBT+G.F.30% (UL 94V-0)	Color:black
3	Housing	PBT+G.F.30% (UL 94V-0)	Color:black
2	Shell	SPCC	Plating:Ni
1	Terminal	Phosphor bronze	Contact area:Au 5u" Solder area:Ni Under-plating:Ni
Item	Desc.	Material	Remark

△	2021/06/24	Change part number	Carl Hu
△	2011/11/24	Changed the size	King Zhou
△	2010/01/09	First edition release	King Zhou
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS	
□:	☒:
CRITICAL	MAJOR
▽:	▽:
ZERO DEFECT	S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25
⊙	⊙

NAME:		SCSI(HPCN) 40pin male solder connector assembly type			PART NO.	B03-040311E0-01	
REV:	E	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2010/01/09	Huangmei	Carl Hu		B03-070
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com		
					TEL:0769-85181660 85181770		