


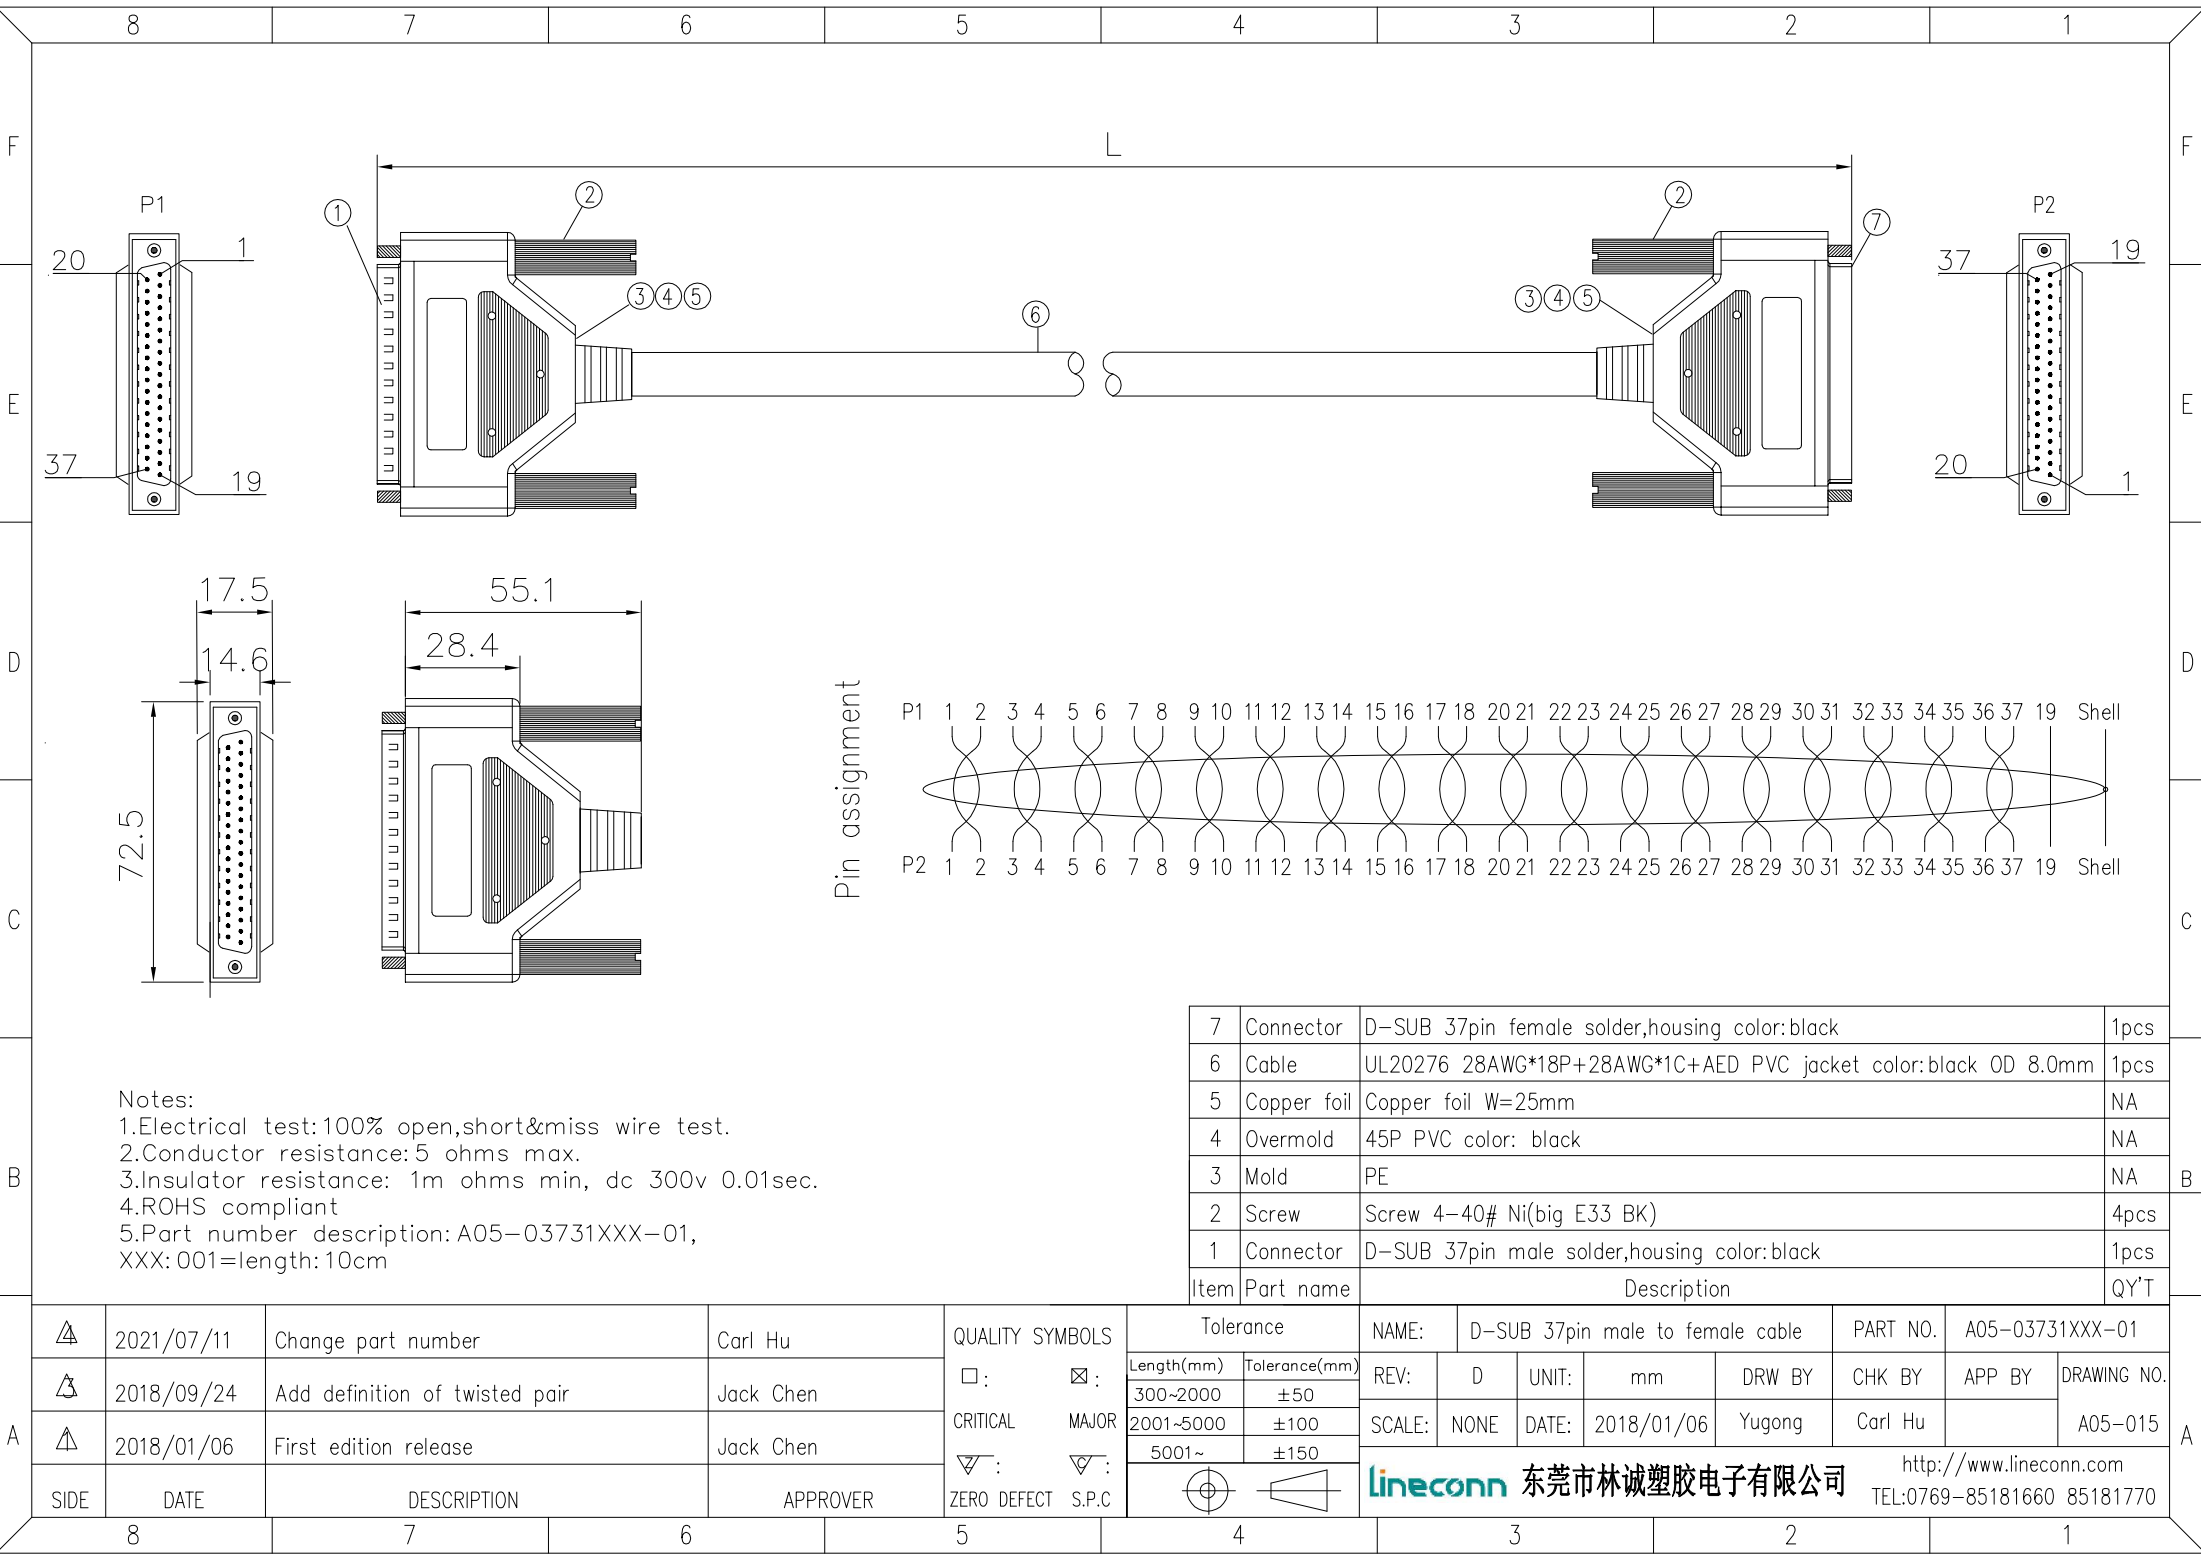

Notes:
1.Electrical test:100% open,short&miss wire test.
2.Conductor resistance:5 ohms max.
3.Insulator resistance: 1m ohms min, dc 300v 0.01sec.
4.ROHS compliant
5.Part number description: A05-03731XXX-01,
XXX: 001=length:10cm

7	Connector	D-SUB 37pin female solder,housing color:black	1pcs
6	Cable	UL20276 28AWG*18P+28AWG*1C+AED PVC jacket color:black OD 8.0mm	1pcs
5	Copper foil	Copper foil W=25mm	NA
4	Overmold	45P PVC color: black	NA
3	Mold	PE	NA
2	Screw	Screw 4-40# Ni(big E33 BK)	4pcs
1	Connector	D-SUB 37pin male solder,housing color:black	1pcs
Item	Part name	Description	QY'T

A		2021/07/11	Change part number	Carl Hu	QUALITY SYMBOLS □ : ✕ : CRITICAL MAJOR ▽ : ▽ : ZERO DEFECT S.P.C	Tolerance		NAME:	D-SUB 37pin male to female cable			PART NO.	A05-03731XXX-01		
		2018/09/24	Add definition of twisted pair	Jack Chen		Length(mm)	Tolerance(mm)	REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
		2018/01/06	First edition release	Jack Chen		300~2000	±50	SCALE:	NONE	DATE:	2018/01/06	Yugong	Carl Hu		A05-015
						2001~5000	±100								
						5001~	±150								
SIDE	DATE	DESCRIPTION	APPROVER				lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770								
8		7		6		5		4		3		2		1	