


No. of contacts:	A	ΔB	C	D
26	24.64	31.26	35.10	25.10
36	31.05	37.61	41.50	31.40
50	39.88	46.50	50.60	40.50
68	51.32	57.90	61.50	51.20

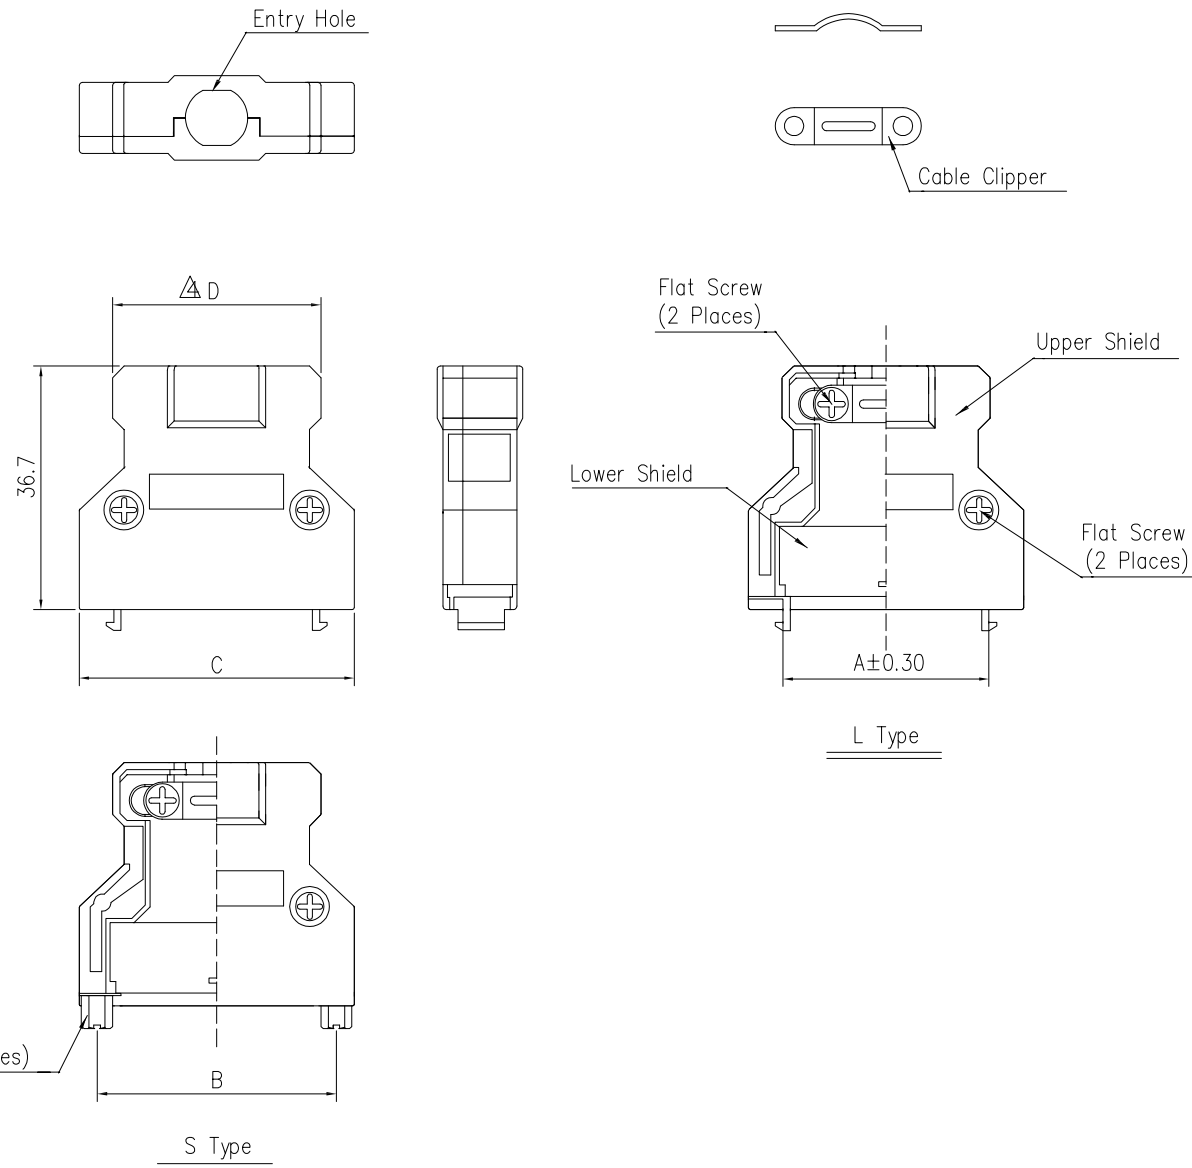

ROHS compliant
Part number:

B02-0XX4N8NX-X1

No.of contacts:-

26: 26pin

36: 36pin

50: 50pin

68: 68pin

Bracket/screws:-

3: L type, bracket

7: S type, nut M2.6

8: S type, nut #2-56

△ Entry hole sizes:-

A: $\phi 7.5\text{mm}$ (26,36pin)

8: $\phi 8.5\text{mm}$ (26pin)

B: $\phi 9.0\text{mm}$ (36,50pin)

C: $\phi 11.0\text{mm}$ (50,68pin)

D: $\phi 14.0\text{mm}$ (68pin)

4	Nut	Steel	Plating: Ni
3	Cable clipper	Steel	Plating: Ni
2	Flat screw	Steel	Plating: Ni
1	Back shell	Zinc alloy	Plating: Ni
Item	Desc.	Material	Remaks

	2023/03/04	Change tolerance	Jack Chen	QUALITY SYMBOLS □ : ☒ : CRITICAL MAJOR ▽ : ▽ : ZERO DEFECT S.P.C	Tolerance		NAME: SCSI female zinc alloy hood, with bracket or nut(26,36,50,68pin)				PART NO.		B02-0XX4N8NX-X1	
	2023/02/09	Correction of screw hole centre distance tolerance	Jack Chen		.x ±0.80 .x ±0.50 .xx ±0.25	REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B02-035	
	2014/11/07	First edition release	Jing Li			SCALE:	N:1	DATE:	2014/11/07	Huangmei	Jack Chen			
SIDE	DATE	DESCRIPTION	APPROVER			lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770								