


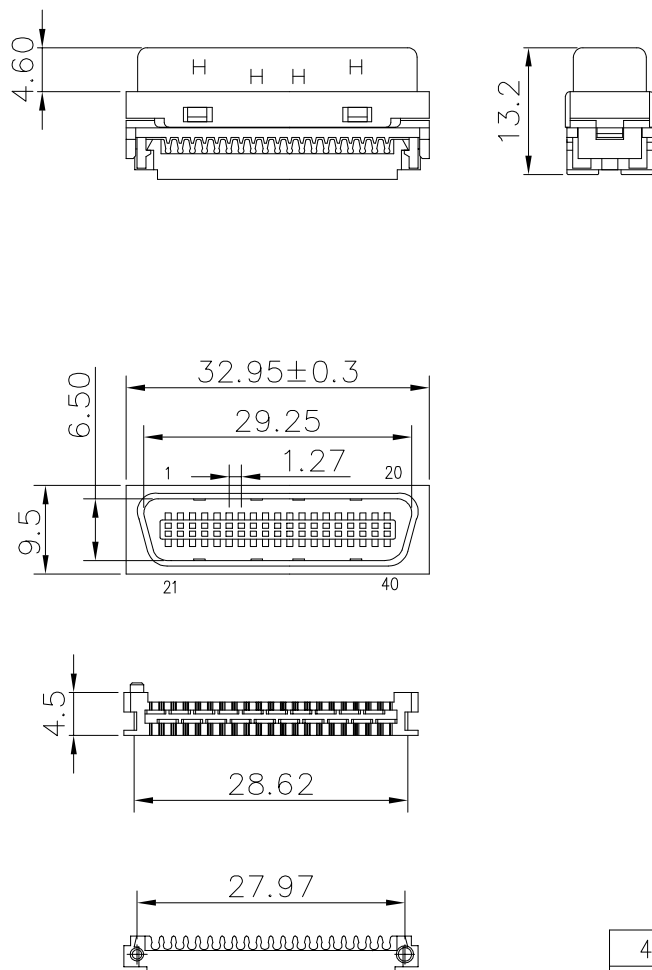

Current rating: 1 AMP.
Withstanding voltage: 500V AC
Insulation resistance: 500MΩ Min.
Contact resistance: 35mΩ max.
Temperature range: -45°C to +125°C
ROHS compliant
Part number:
 B03-040111E0-X0
Wire holder: _____
28AWG or 30AWG wire
6: 0.62mm
7: 0.75mm
9: 0.90mm

4	Cover	PBT+G.F.30% (UL 94V-0)	Color: black
3	Housing	PBT+G.F.30% (UL 94V-0)	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Ni Under-plating: Ni
Item	Desc.	Material	Remark

	2021/06/24	Change part number	Carl Hu	QUALITY SYMBOLS	Tolerance		NAME:		SCSI(HPCN) 40pin male IDC connector assembly type			PART NO.		B03-040111E0-X0	
	2011/11/24	Changed the size	King Zhou	 :  :	x.	±0.60	REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
	2010/01/09	First edition release	King Zhou	CRITICAL MAJOR	.x	±0.40	SCALE:	N:1	DATE:	2010/01/09	Huangmei	Carl Hu		B03-069	
				 :  :	.xx	±0.25	 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770								
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C	 										

lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
TEL:0769-85181660 85181770