
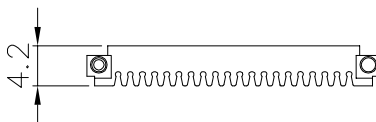
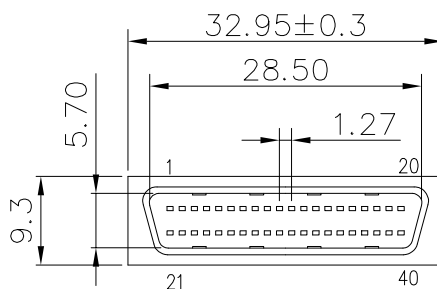



Termination cover
(1 places)

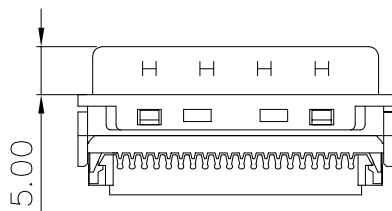

Wire holder
(2 places)

Current rating: 1 AMP.
Withstanding voltage: 500V AC
Insulation resistance: 500MΩ Min.
Contact resistance: 35mΩ max.
Temperature range: -45℃ to +125℃
ROHS compliant
Part number:
B02-040111E0-X0
Wire holder:
28AWG or 30AWG wire
6: 0.62mm
7: 0.75mm
9: 0.90mm

4	Cover	PBT+G.F.30% (UL 94V-0)	Color: black
3	Housing	PBT+G.F.30% (UL 94V-0)	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Ni Under-plating: Ni
Item	Desc.	Material	Remark

	2021/06/24	Change part number	Carl Hu	QUALITY SYMBOLS □: ☒: CRITICAL MAJOR ▽: ▽: ZERO DEFECT S.P.C	Tolerance x. ±0.60 .x ±0.40 .xx ±0.25 	NAME: SCSI II(HPDB) 40pin male IDC connector assembly type					PART NO.	B02-040111E0-X0		
	2011/11/24	Changed the size	King Zhou			REV: D	UNIT: mm	DRW BY	CHK BY	APP BY	DRAWING NO. B02-041			
	2010/01/09	First edition release	King Zhou			SCALE: N:1	DATE: 2010/01/09	Huangmei	Carl Hu					
SIDE	DATE	DESCRIPTION	APPROVER			lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770								