



Current rating: 1A, 30V AC
 Insulation resistance: 500MΩ/Min
 Withstanding voltage: 500V AC/Min
 Contact resistance: 35mΩ Max
 Temperature range: -45°C to +125°C
 ROHS compliant

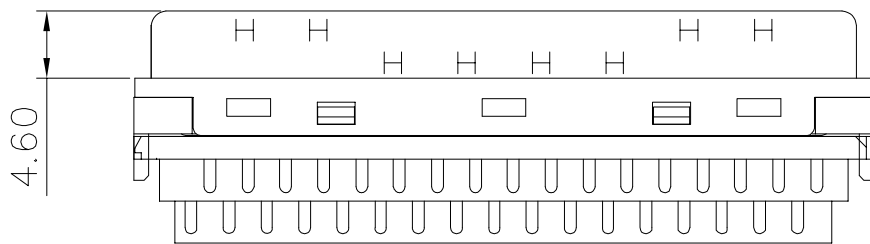

4	Cover	PBT+G.F.30% (UL 94V-0)	Color:black
3	Housing	PBT+G.F.30% (UL 94V-0)	Color:black
2	Shell	SPCC	Plating:Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

A	△	2022/10/09	Change tolerance	Carl Hu	QUALITY SYMBOLS □: ☒: CRITICAL MAJOR ▽: ▽: ZERO DEFECT S.P.C	Tolerance .x ±0.60 .x ±0.40 .xx ±0.25	NAME:	SCSI(HPCN) 68pin male solder assembly connector			PART NO.	B03-068311EN-01		
	△	2021/03/22	Change of part number	Jack Chen			REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
	△	2008/11/03	First edition release	Fei Chen	SCALE:	N:1	DATE:	2008/11/03	Yugong	Carl Hu				
	SIDE	DATE	DESCRIPTION		APPROVER			lineconn 东莞市林诚塑胶电子有限公司			http://www.lineconn.com TEL:0769-85181660 85181770			
8	7	6	5	4	3	2	1							