
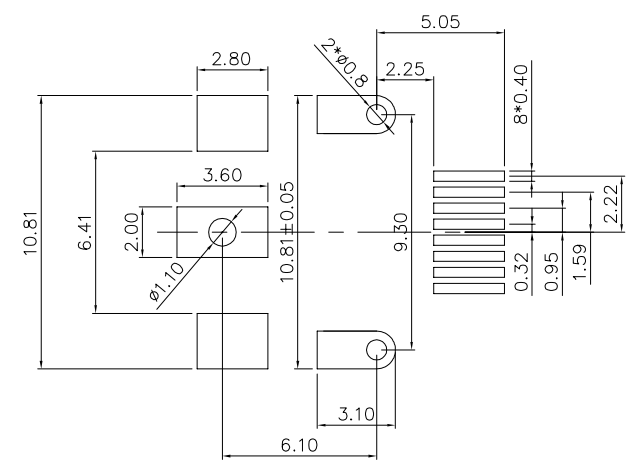
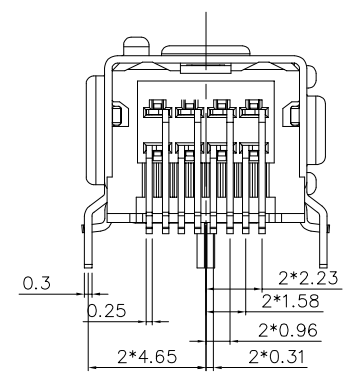
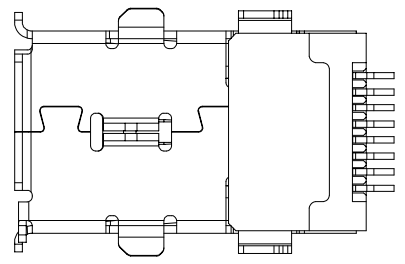
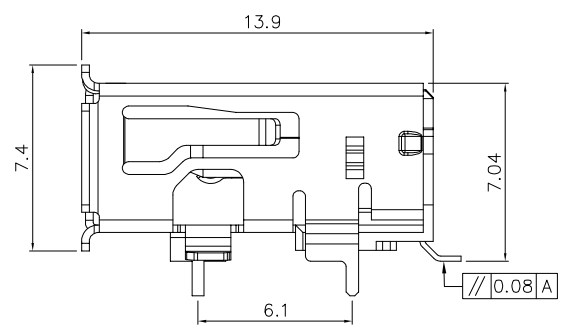



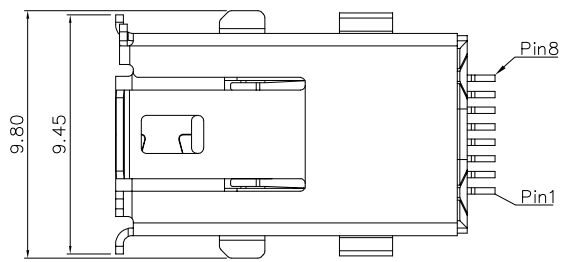

Current rating:0.5A
Withstanding voltage: 60V
Durability: 1500 Cycles
Temperature range: -45℃ to +85℃
ROHS compliant

3	Housing	LCP	Color: black
2	Sheel	Copper alloy	Plating: matte-tin
1	Terminal	Copper alloy	Contact area: Au Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△				QUALITY SYMBOLS
△				□: ☒:
△	2023/11/19	First edition release	Jack Chen	CRITICAL MAJOR
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C
8	7	6	5	4

QUALITY SYMBOLS		Tolerance		NAME:		Mini I/O header SMT connector,Panasonic servo X2 socket,1981386-1				PART NO.		B01-008019A0-01	
☐ :	☒ :	x.	±0.60	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.		
CRITICAL	MAJOR	.x	±0.40	SCALE:	N:1	DATE:	2023/11/19	Huangmei	Jack Chen		B01-073		
		.xx	±0.25	lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770									
☐ :	☒ :												
ZERO DEFECT	S.P.C												