
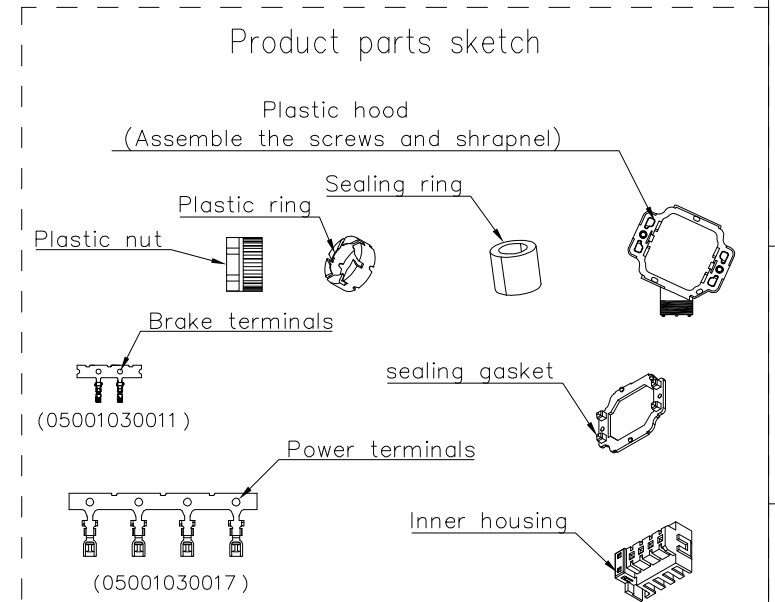
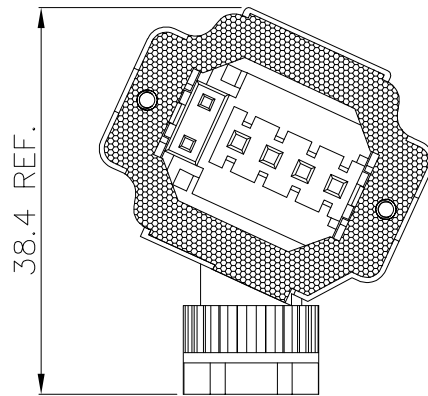
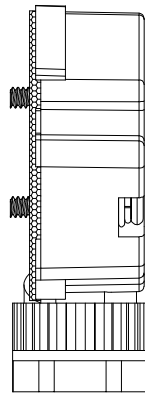
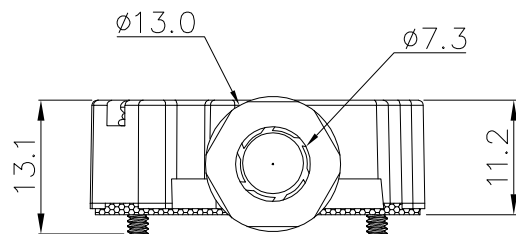


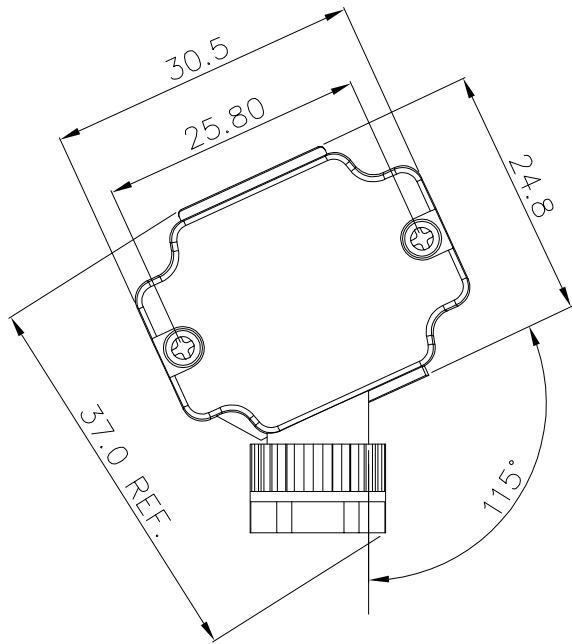

Rated current: Power 7A Max./Brake 5A Max.
Rated voltage: 200VAC
Withstand voltage: 1500VAC
Insulation resistance: 1000M Ω Min. at 500VDC
Working temperature: -20°C to 105°C
Protection grade: IP67

10	Shrapnel	Stainless steels		2pcs
9	Plastic ring	PA66+30%GF UL94V-0	Color: black	1pcs
8	Screw	Steel	Color: black	2pcs
7	Power terminals	Phosphor bronze	Plating: Au	4pcs
6	Brake terminals	Phosphor bronze	Plating: Au	2pcs
5	Sealing ring	Rubber	Color: black	1pcs
4	sealing gasket	Rubber	Color: black	1pcs
3	Inner housing	PA66+30%GF UL94V-0	Color: black	1pcs
2	Plastic nut	PA66+30%GF UL94V-0	Color: black	1pcs
1	Plastic hood	PA66+30%GF UL94V-0	Color: black	1pcs
Item	Desc.	Material	Remark	Quantity

	2025/05/21	Changed tolerance	Jack Chen
	2022/03/07	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS	
CRITICAL	MAJOR
ZERO DEFECT	S.P.C

Tolerance	
x.	± 0.60
.x	± 0.40
.xx	± 0.25

NAME:	JN01-06P servo power+brake connector for cable	PART NO.	B01-JN01006P-01
REV:	B	UNIT:	mm
DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2022/03/07
Huangmei	Jack Chen		B01-059