
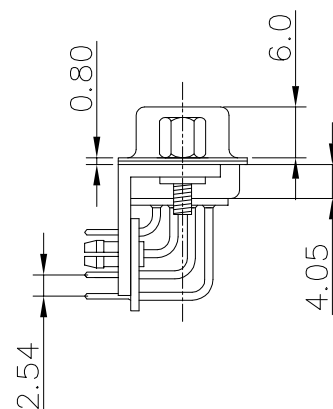
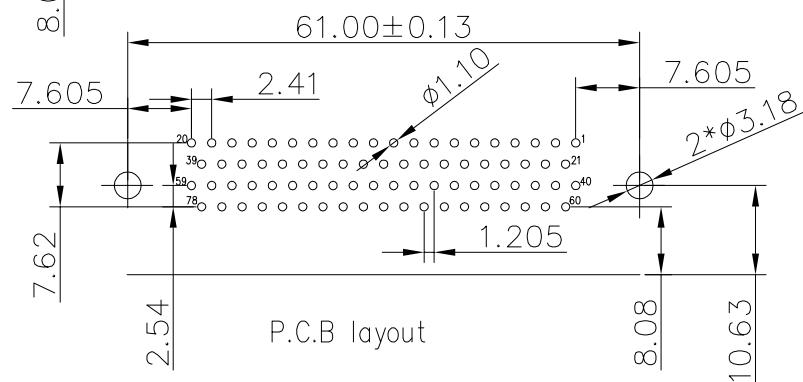
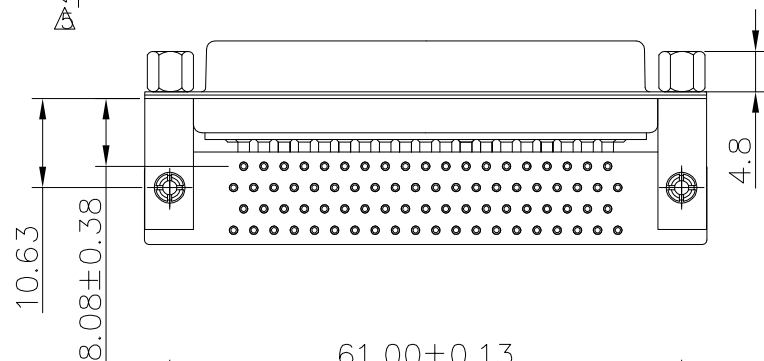


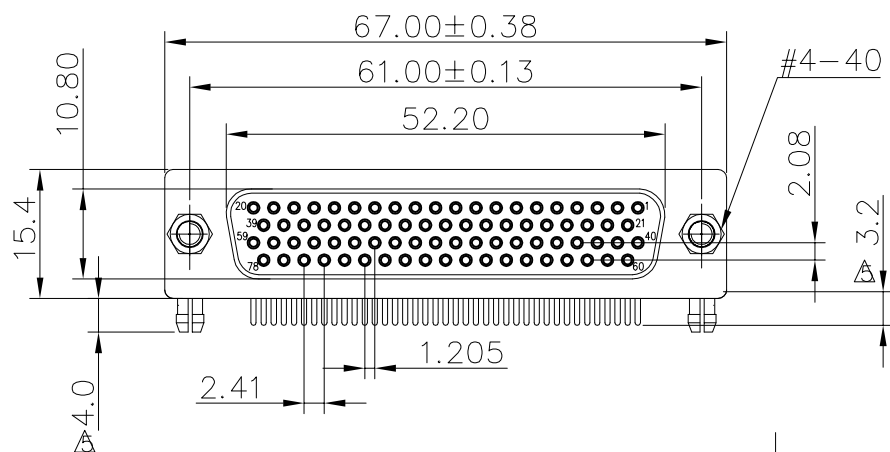

Current rating: 5 AMP.
Withstanding voltage: 1000V AC
Insulation resistance: 5000MΩ Min.
Temperature range: -45°C to +125°C
ROHS compliant

Part number:

B04-0786X1XD-02

Housing color:-

1: Black

5: White

6: Blue

Terminal plating:-

4: Ful gold 2u"

5: Ful gold 1u"

7	Riveted insert	Brass	Plating: Ni
6	Board lock	Brass	Plating: Sn
5	Nut	Steel	Plating: Ni
4	Housing	PBT+30%GF	Color: see part no.
3	Rear shell	SPCC	Plating: Sn
2	Front shell	SPCC	Plating: Ni
1	Terminal	Brass	Terminal finish: see part no.
Item	Desc.	Material	Remarks

	2025/05/08	Add dimension annotations	Jack Chen	QUALITY SYMBOLS □: ☒: CRITICAL MAJOR ▽: ▽: ZERO DEFECT S.P.C	Tolerance		NAME:		HD.D-SUB machined pin 78pin female right angle,8.08mm,riveted board lock,nut 4.8mm				PART NO.		B04-0786X1XD-02	
	2023/01/08	Change tolerance	Jack Chen		x. ±0.60	REV:	E	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.			
	2013/08/11	First edition release	Jing Li		.x ±0.40	SCALE:	N:1	DATE:	2013/08/11	Huangmei	Jack Chen					
SIDE	DATE	DESCRIPTION	APPROVER		.xx ±0.25	 		 东莞市林诚塑胶电子有限公司				http://www.lineconn.com TEL:0769-85181660 85181770				

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL:0769-85181660 85181770