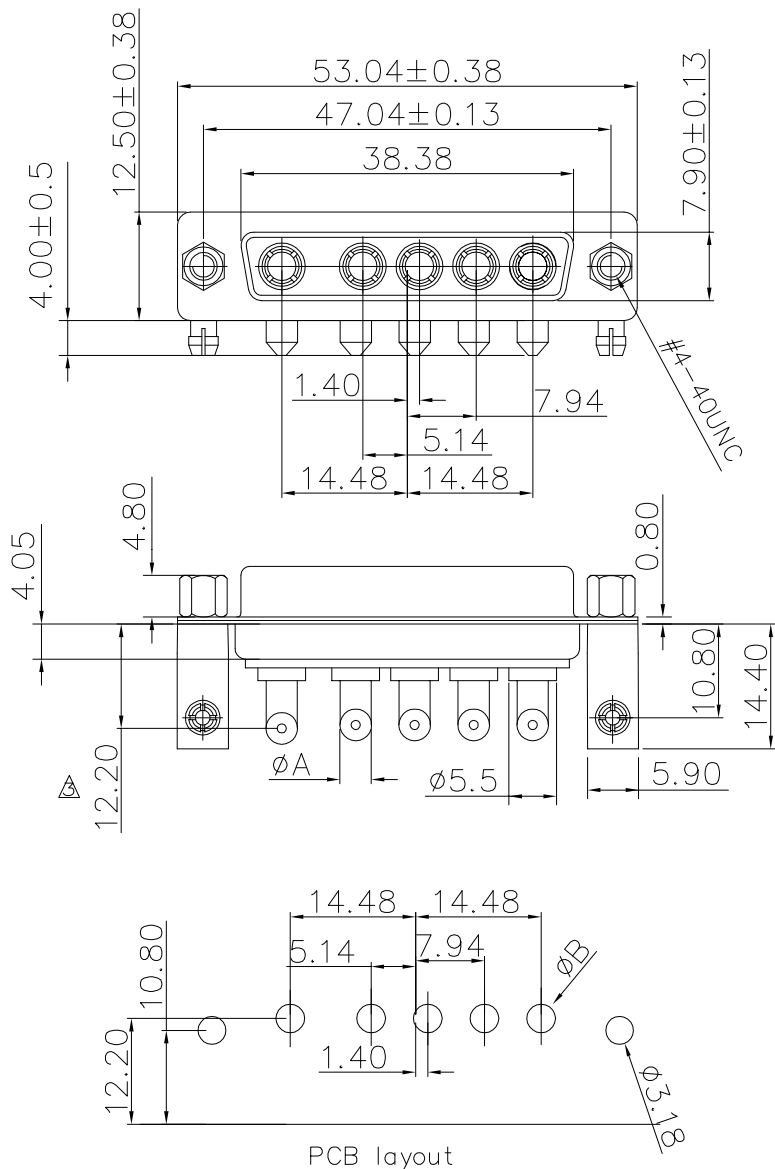


△ Current rating: 10/20/30/40 AMP.
Contact resistance: 2.7 milliohms max.
Withstanding voltage: 1000V AC
Insulation resistance: 5000MΩ Min.
Temperature range: -55℃ to +125℃
ROHS compliant
Part No.:

B08-5W56X1XD-X1
Housing color: _____
1: Black
3: Green
5: White
△ Terminal plated: _____
4: Au 2u"
5: Au 1u"

△ Current rating: _____
A: 10A, Dim.A ϕ 1.7 Dim.B ϕ 2.2
B: 20A, Dim.A ϕ 2.8 Dim.B ϕ 3.3
C: 30A, Dim.A ϕ 3.2 Dim.B ϕ 3.7
D: 40A, Dim.A ϕ 3.7 Dim.B ϕ 4.2

7	Prop up	Steel	Plating: Ni
6	Screws	Steel	Plating: Ni
5	Housing	PBT+30%GF	Color: see part no.
4	Riveted insert	Brass	Plating: Ni
3	Rear shell	SPCC	Plating: Sn
2	Front shell	SPCC	Plating: Ni
1	Terminal	Brass	Plating: see part no.
Item	Desc.	Material	Remarks

△	2024/09/24	Correct wrong size	Jack Chen
△	2024/09/07	change the size, Add ROHS mark, Add terminal plated type	Jack Chen
△	2017/04/10	First edition release	Jing Li
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS
□: ☒: CRITICAL MAJOR
▽: ▽: ZERO DEFECT S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25

NAME:	5W5 female right angle, riveted insert, lock screw				PART NO.	B08-5W56X14XD-X1		
REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2017/04/10	Huangmei	Jack Chen		B08-051	

lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
TEL: 0769-85181660 85181770